



Direct



Direct / Indirect

Product Features

Revolve Series 82 - Ring shaped versatile architectural luminaire housing from rolled aluminum extruded profile, seamlessly welded; available with standard matte Black, White, Silver or custom RAL finish; available with steel cable suspension system through surface canopy or direct ceiling mount; power supply unit to be installed in canopy or remote; entire luminaire homogeneously illuminated, single ring shaped frosted PMMA lens; soft direct / indirect illumination characteristic for general illumination and maximum visual comfort; SAMSUNG LED with above 90CRI; available in 2700K, 3000K, 3500K, 4000K, RGBW and Tunable White; 85% of luminous flux after 50000 hours; ETL damp location listed; universal power supply with 0-10v dimming capability.


Technical Specifications

INPUT VOLTAGE	Universal Input AC110-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K, RGBW, Tunable White
COLOR RENDERING INDEX	90
DISTRIBUTION	Direct, Direct 70% / Indirect 30% / Custom
IP RATING	Damp Location
LIFE SPAN	50,000 Hours
DIMMING	0-10v Dimming, Electronic Low Voltage Dimming



DIMENSIONS



Direct



DIMENSION

- D24" x W1.3" x H1.5"
- D36" x W1.3" x H1.5"
- D48" x W1.3" x H1.5"
- D60" x W1.3" x H1.5"
- D79" x W1.3" x H1.5"


Direct / Indirect




DIMENSION

- D24" x W1.7" x H2.7"
- D36" x W1.7" x H2.7"
- D48" x W1.7" x H2.7"
- D60" x W1.7" x H2.7"
- D79" x W1.7" x H2.7"

**CM
Canopy Mount**

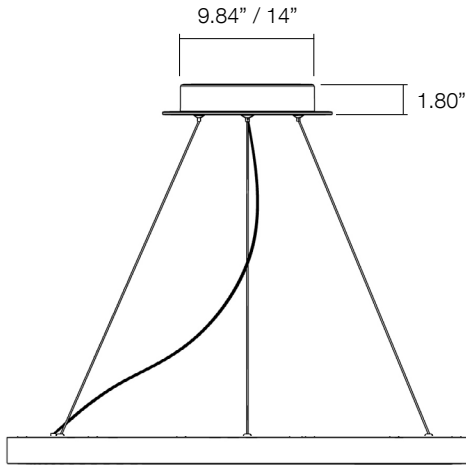

**QM
Quick Mount**

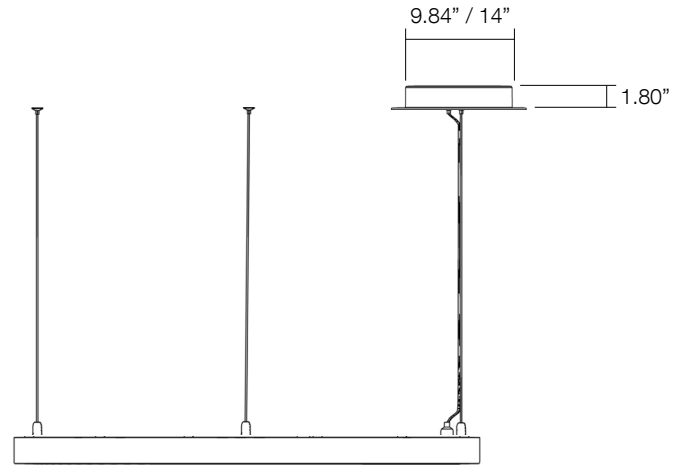

COLOR CHART (CHOOSE ONE)

CC
RAL

Specify Color Code:
Specify RAL Color:

