



Product Features

LUX Series LX1.3 architectural linear luminaire housing from 1.3" wide aluminum extruded profile, available in 2, 4, and 8-Ft length with Black, White finish; steel cable suspension system for direct ceiling mounting, with power supply unit integral inside fixture, and power feed cable through the 5-inch junction box cover plate; integral driver, frosted polycarbonate lens; emits even soft direct/indirect facing light for general illumination; >80CRI LED; field selectable CCT in 3000K / 3500K / 4000K; 85% of luminous flux after 50,000 hours; cULus damp location listed; universal input 120-277V power supply with 0-10V dimming capability down to 10%.

Technical Specifications

INPUT VOLTAGE	Universal Input AC120-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	Field Selectable 3000K / 3500K / 4000K
COLOR RENDERING INDEX	>80
DISTRIBUTION	Direct/Indirect, Field Selectable Output
IP RATING	Damp Location
LIFE SPAN	>50,000 Hours
DIMMING	0-10V Dimming





LUX SERIES | LX1.3 SURFACE / SUSPENDED / WALL

SUBMITTAL WORKSHEET

Order Code Example: **LX1.3** **- IL2** **- SC** **- QM** **- WH** **- WH**
 A **B** **C** **D** **E** **F**

LX1.3-CON - EMB-H08170

G **G**

A SERIES (CHOOSE ONE)

LX1.3 LUX Series 1.3" Profile Architectural Linear

B SIZE & OUTPUT (CHOOSE ONE)

CODE	LENGTH	DISTRIBUTION	RATIO FIELD SELECTABLE	POWER & LUMEN FIELD SELECTABLE
IL2 QS	2FT	Direct (D) / Indirect (I)	D-75% & I-25%, D-100%	10W / 15W / 20W
IL4 QS	4FT	Direct (D) / Indirect (I)	D-75% & I-25%, D-100%	20W / 30W / 40W
IL8 QS	8FT	Direct (D) / Indirect (I)	D-75% & I-25%, D-100%	40W / 60W / 80W

*see page 3 for Lumen Detail

C CCT (CHOOSE ONE)

SC **QS** Field Selectable 3000K / 3500K / 4000K

D MOUNTING (CHOOSE ONE)

QM **QS** 4FT Steel Cable Direct Mount, 5-Inch Junction Box Cover Plate With Integral Driver
SM **QS** Surface Mount Kit (SUITABLE FOR DIRECT DISTRIBUTION ONLY)
WM Wall Mount
QMR-T* **QS** 4FT Suspension, 4FT Power Cord, 4.5-inch Round J-box Plate & 1.6-inch Mounting Plate With Adjustable T-Bar Clip

*see pg. 7 for detail

- 4" Octagon box included, adjustable T-bar clip suitable for 9/16" Flat, 9/16" Slot, 15/16" Flat T-bar grid spec

E FINISH (CHOOSE ONE)

BK **QS** Black
WH **QS** White

F POWER CORD (CHOOSE ONE)

BK **QS** 4FT Black Power Cord
WH **QS** 4FT White Power Cord

G OPTIONS

blank Integral Driver 120~277V 0-10V Dimming
AIA Assembled in America, Compliant with BAA (COTS)
LX1.3-CON **QS** LUX 1.3" Profile Line Joiner (Metal Bracket)
LX1.3-CON-N-L **QS** LUX 1.3" Profile "L" 90DEG NonLit Corner
LX1.3-CON-N-T **QS** LUX 1.3" Profile "T" 90DEG NonLit Corner
LX1.3-CON-N-X **QS** LUX 1.3" Profile "X" 90DEG NonLit Corner
LENS-LX1.3-42FT **QS** LUX 1.3" 42FT Continuous Rolling Lens
EMB-H08170* **QS** High Voltage Output Smart Emergency Battery 8W 100-347VAC Input 170VDC Output
EMB-H18170* **QS** High Voltage Output Smart Emergency Battery 18W 100-347VAC Input 170VDC Output

*see page 6 for EMB spec

LUX SERIES | LX1.3 SURFACE / SUSPENDED / WALL

DIMENSIONS

Cross Section

SERIES & SIZE

LX1.3-IL2

LX1.3-IL4

LX1.3-IL8

DIMENSION

L25.28" x W1.30" x H2.24"

L50.40" x W1.30" x H2.24"



L100.63" x W1.30" x H2.24"

Section


1

1

1

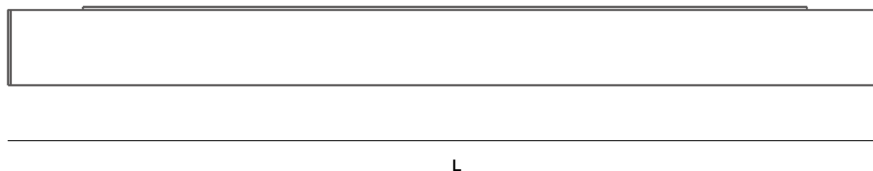

Quick Mount

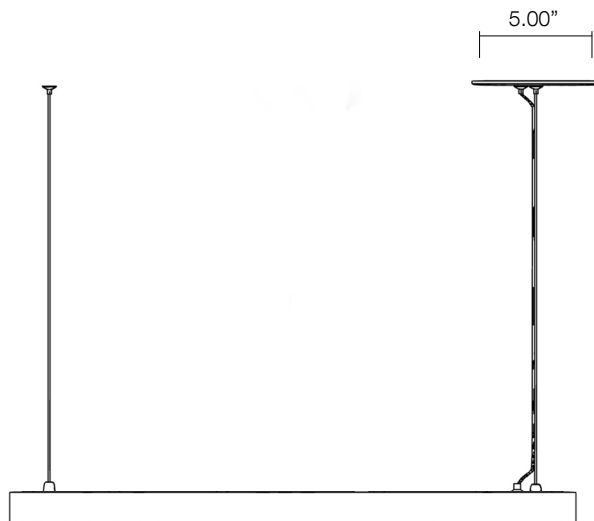


PERFORMANCE


Lens Type	Length	Power Setting (Field Selectable)			Distribution Setting (Field Selectable)					
					D-75% & I-25%			D-100%		
		(W)			(LM)			(LM)		
		Low	Mid	High	Low	Mid	High	Low	Mid	High
Frosted	2FT	10	15	20	981	1472	1962	905	1358	1810
	4FT	20	30	40	1993	2990	3986	1886	2829	3771
	8FT	40	60	80	3986	5979	7732	3771	5657	7542

LUX SERIES | LX1.3 SURFACE / SUSPENDED / WALL


DIMENSIONS

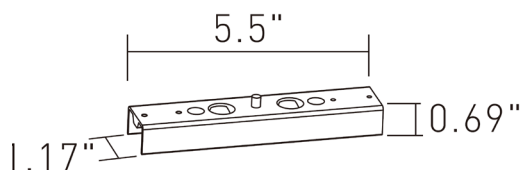


LX1.3-CON
LUX 1.3" Profile Line Joiner (metal bracket)

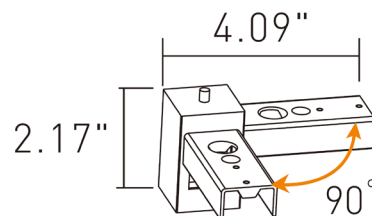

LX1.3-CON-N-L
LUX 1.3" Profile "L" 90DEG NonLit Corner

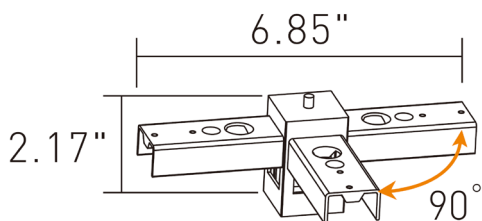

LX1.3-CON-N-T
LUX 1.3" Profile "T" 90DEG NonLit Corner

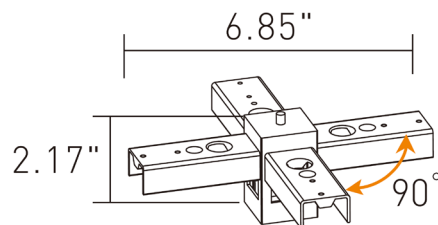


LX1.8-CON-N-X
LUX 1.3" Profile "X" 90DEG NonLit Corner

LUX SERIES | LX1.3 SURFACE / SUSPENDED / WALL

PHOTOMETRIC


IES: LX1.3-IL2SC D-75% / I-25% @ 4000K 20W

IES: LX1.3-IL2SC D-100% @ 4000K 20W



Zone	Lumen	Luminaire%
0-30	414	21.10
0-40	673	34.30
0-60	1176	59.90
0-90	1473	75.10
0-180	1962	100

Lumen: 1962
 Input Watts: 19.8 W
 Efficacy: 99 LPW
 UGR: 28.2




Zone	Lumen	Luminaire%
0-30	240	28
0-40	823	45.60
0-60	1440	79.60
0-90	1803	99.60
0-180	1810	100

Lumen: 1810
 Input Watts: 19.7 W
 Efficacy: 92 LPW
 UGR: 30.2


IES: LX1.3-IL4SC D-75% / I-25% @ 4000K 40W

IES: LX1.3-IL4SC D-100% @ 4000K 40W



Zone	Lumen	Luminaire%
0-30	896	22.50
0-40	1463	36.70
0-60	2540	63.70
0-90	3189	80
0-180	3986	100

Lumen: 3986
 Input Watts: 41.8 W
 Efficacy: 95 LPW
 UGR: 28.9




Zone	Lumen	Luminaire%
0-30	1054	27.90
0-40	1719	45.60
0-60	2987	79.20
0-90	3751	99.50
0-180	3771	100

Lumen: 3771
 Input Watts: 42.2 W
 Efficacy: 89 LPW
 UGR: 30.5

LUX SERIES | LX1.3 SURFACE / SUSPENDED / WALL

EMB SPEC


Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-H08170	90mins	100-347VAC	170VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Field Install
EMB-H18170	90mins	100-347VAC	170VDC	18W	0°C ~ 50°C 32°F ~ 122°F	Field Install

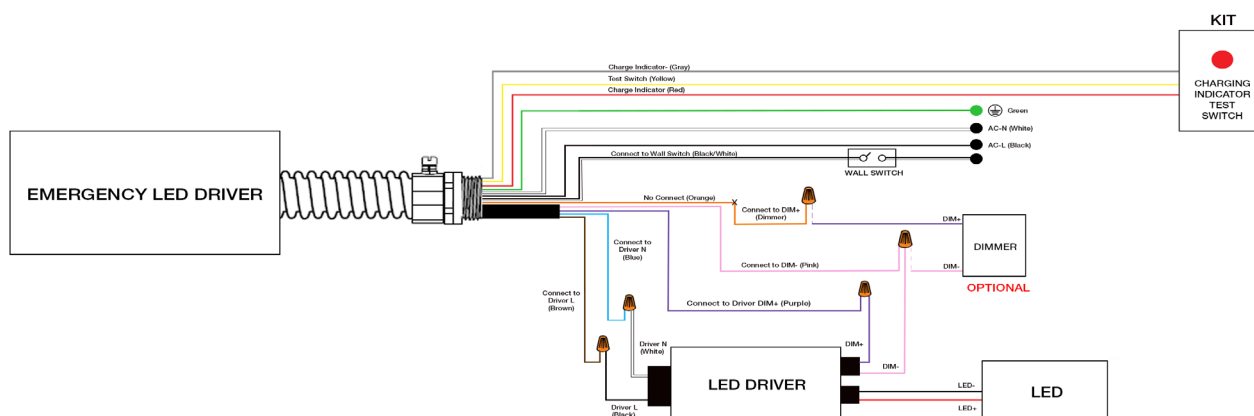

LUX SERIES | LX1.3 SURFACE / SUSPENDED / WALL

INSTALLATION

QUICK MOUNT

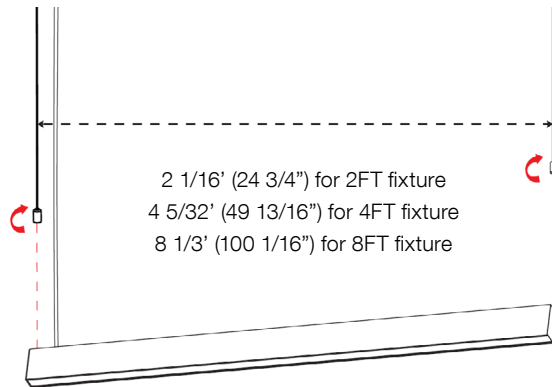


1: Install suspension by rotating adapter clockwise to the top of the fixture.



2: Use cable tie to keep the power feed wire in place next to the suspension cable.


T-GRID INSTALL

Part# QMR-T

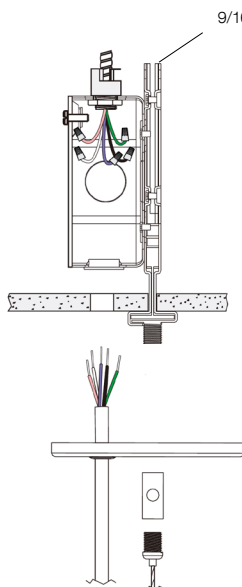

4.5-inch J-box plate
Adjustable T-Bar Clip*
4" Octagon Box included with T-Bar Clip
J-box plate supports (1) cable suspension

Part# QMR-T

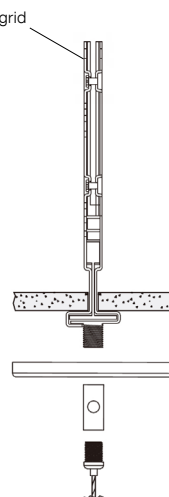


1.6-inch mounting plate
Adjustable T-Bar Clip*
(1) cable suspension

*suitable for 9/16" Flat, 9/16" Slot, 15/16" Flat T-bar grid spec


LUX SERIES | LX1.3 SURFACE / SUSPENDED / WALL

INSTALLATION

SURFACE MOUNT

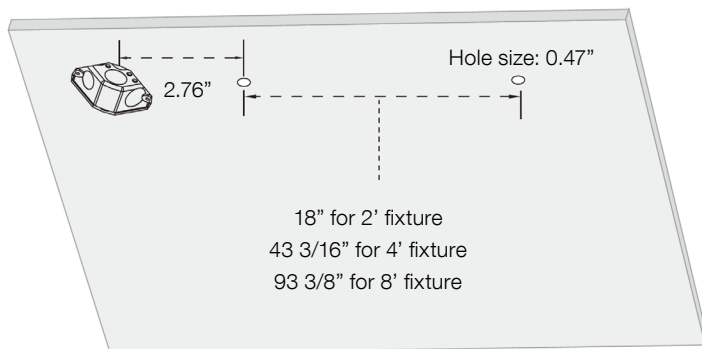


1: Identify mounting location

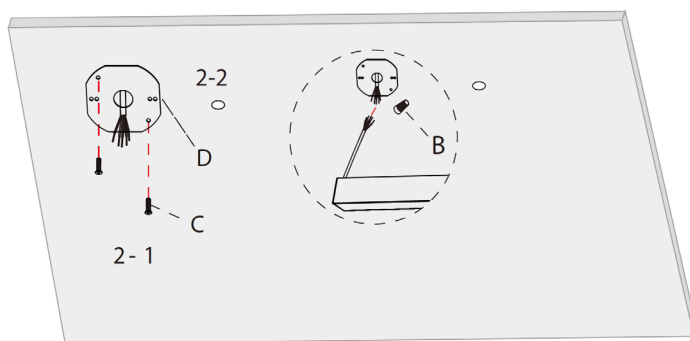

2-1: Use the Square Plate "D" to cover the junction box and secure with screw "C", before plastering the ceiling.

2-2: Make the wiring connection using the wire nuts provided between the luminaire and the incoming power line.

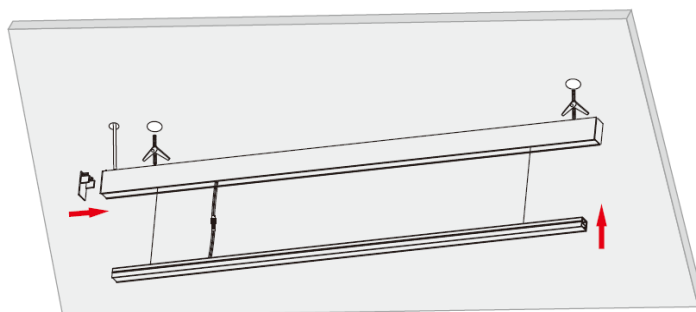


3.1: Install Butterfly Drywall Anchor "A" on housing.


3.2: Insert LED module back into housing to make wiring connection.

INSTALLATION

WALL MOUNT

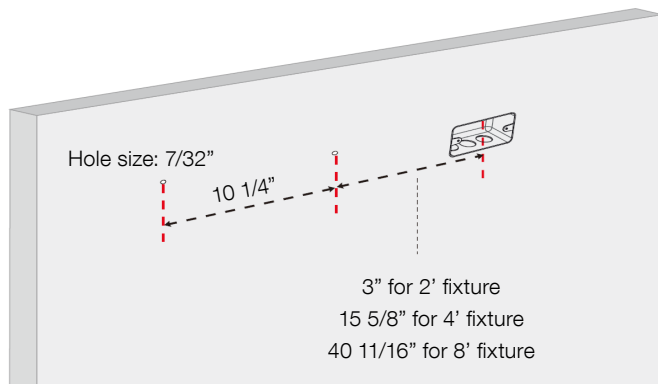


1: Identify mounting location

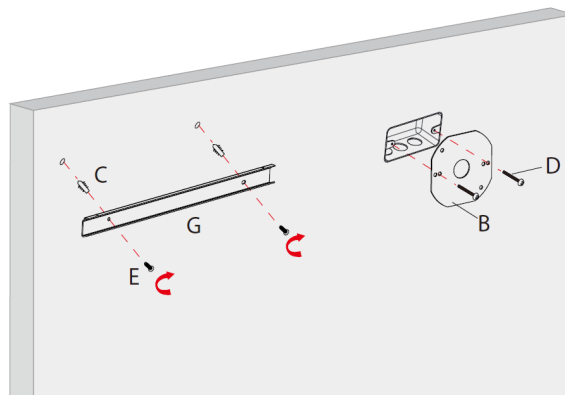


2-1: Insert Anchor "C" into both holes and secure the mounting bracket "G" with screw "E".

2-2: Use the square cover plate "B" to cover the junction box and secure with screw "D", before plastering the wall.

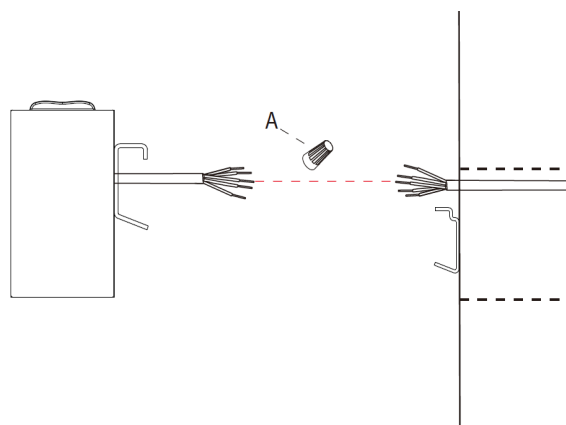

3-1: Make the wiring connection using the wire nuts provided between the luminaire and the incoming power line.

3-2: Tuck the wires into junction box.

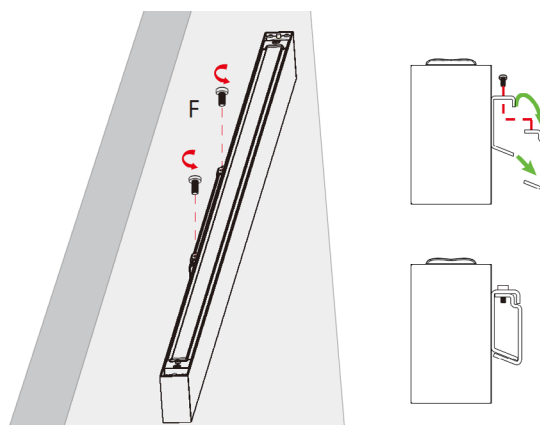

4: Latch the luminaire to the mounting bracket, and secure it with screws provided.