

### Product Features

ALLURE Hexa Series Honeycomb center hollow hexagon shaped architectural luminaire housing from aluminum extruded profile, seamlessly welded; available with standard matte Black, White, Silver or custom RAL finish; available with steel cable suspension system through surface, canopy, or direct ceiling mount, with power supply unit integral inside fixture, and power feed cable through the 5-inch junction box to cover plate; entire luminaire homogeneously illuminated, laser-cut frosted PMMA lens; soft 100% direct, or 70% direct with 30% indirect illumination characteristic for general illumination and maximum visual comfort; SAMSUNG LED with above 90CRI; available in 2700K, 3000K, 3500K, 4000K; 85% of luminous flux after 50000 hours; ETL damp location listed; universal power supply with 0-10v dimming capability.

### Technical Specifications

INPUT VOLTAGE	Universal Input AC110-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K
COLOR RENDERING INDEX	90
DISTRIBUTION	Direct, Direct/Indirect
IP RATING	Damp Location
LIFE SPAN	50,000 Hours
DIMMING	0-10v Dimming



## HEXA SERIES | HCX

## SUBMITTAL WORKSHEET

Order Code Example: **HCX** - **H1** - **40** - **QM** - **MW** - **WH** - **OPTIONS**  
A B C D E F G**A** SERIES (CHOOSE ONE)**HCX** Hexa Honeycomb Series Center Hollow Hexagon Shaped Luminaire**B** SIZE & OUTPUT (CHOOSE ONE)

CODE	DISTRIBUTION	POWER & LUMEN		LPW	DIMENSION	SUSPENSION	DRIVER	SECTION
<b>H1</b>	Direct	25W	2,125lm	85	16.4" x 18.9" x 3.1"	3	1	1
<b>H2</b>	Direct	40W	3,400lm	85	20.5" x 23.6" x 3.1"	4	1	1
<b>H3</b>	Direct	90W	7,650lm	85	30.7" x 35.4" x 3.1"	4	2	1
<b>H4</b>	Direct	180W	15,300lm	85	40.9" x 47.2" x 3.1"	6	2	1
<b>HC (Custom)</b>	Direct			85	x 3.1"			
<b>UH1 - 70/30</b>	Direct / Indirect	50W	2,975/1,275lm	85	16.4" x 18.9" x 3.6"	3	2	1
<b>UH2 - 70/30</b>	Direct / Indirect	80W	4,760/2,040lm	85	20.5" x 23.6" x 3.6"	4	2	1
<b>UH3 - 70/30</b>	Direct / Indirect	120W	7,140/3,060lm	85	30.7" x 35.4" x 3.6"	4	3	1
<b>UH4 - 70/30</b>	Direct / Indirect	220W	13,090/5,610lm	85	40.9" x 47.2" x 3.6"	6	3	1
<b>UHC (Custom)</b>	Direct / Indirect			85	x 3.6"			

**C** CCT (CHOOSE ONE)

27	2700K	35	3500K
30	3000K	40	4000K

**D** MOUNTING (CHOOSE ONE)

**CM** 5FT Steel Cable, 10-Inch Surface Mount Canopy, Integral Driver  
**QM** 5FT Steel Cable Direct Mount, 5-Inch Junction Box Cover Plate With Integral Driver (120/277V 0-10V Dimming)  
**SM** Surface Mount, Integral Power

**E** FINISH (CHOOSE ONE)

<b>MB</b>	Black	<b>MS</b>	Silver
<b>MW</b>	White	<b>CC*</b>	Customized Color

\*see Customized Color Chart on pg 3

**F** POWER CORD (CHOOSE ONE)

<b>BK</b>	5FT Black Power Cord
<b>WH</b>	5FT White Power Cord

**G** OPTIONS

<b>blank</b>	120/277V 0-10V Dimming
<b>FAD</b>	Customized Output (Consult Factory)


## HEXA SERIES | HCX

### DIMENSIONS

#### SERIES & SIZE

HCX-H1  
HCX-H2  
HCX-H3  
HCX-H4  
HCX-HC


HCX-UH1  
HCX-UH2  
HCX-UH3  
HCX-UH4  
HCX-UHC

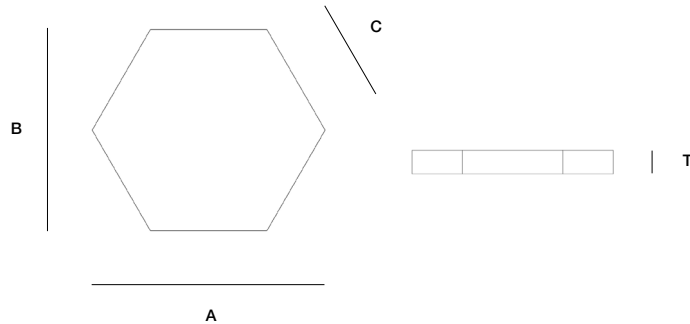


#### DIMENSION

A16.4" x B18.9" x T3.1"	C = 9.45"
A20.5" x B23.6" x T3.1"	C = 11.8"
A30.7" x B35.4" x T3.1"	C = 17.7"
A40.9" x B47.2" x T3.1"	C = 23.6"
x T3.1"	C =
A16.4" x B18.9" x T3.6"	C = 9.45"
A20.5" x B23.6" x T3.6"	C = 11.8"
A30.7" x B35.4" x T3.6"	C = 17.7"
A40.9" x B47.2" x T3.6"	C = 23.6"
x T3.6"	C =

#### CM Canopy Mount

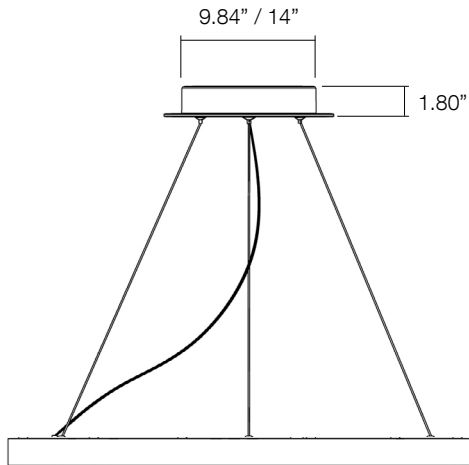

#### QM Quick Mount

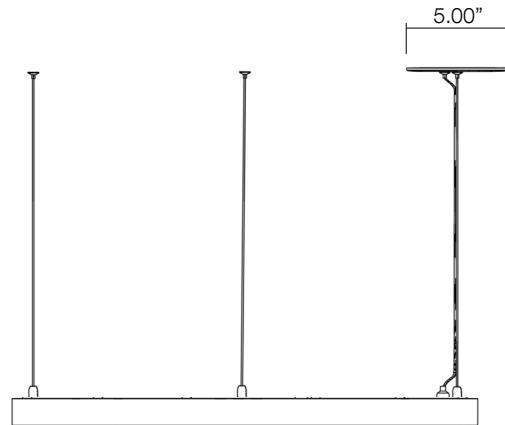

### COLOR CHART (CHOOSE ONE)

CC  
RAL

Specify Color Code:  
Specify RAL Color:



GR - Green



BL - Blue



PP - Purple



PK - Pink



RD - Red



OG - Orange



YW - Yellow



MB - Matte Black



GB - Gloss Black



MW - Matte White



GW - Gloss White



OB - Oil Rubbed Bronze



GZ - Gloss Bronze



MS - Matte Silver



MBS - Matte Brass



GBS - Gloss Brass