



Suspended - 36" Luminaire



Surface Mount - 24" Luminaire

**Product Features**

Glow Slim Series - Ultra low profile round shaped architectural luminaire housing from rolled aluminum profile, laser cut and seamlessly welded; available with matte Black, White, Silver or custom RAL finish; offered with steel cable suspension system through surface canopy; or optional surface mount; power supply unit to be installed in canopy or remote; frosted PMMA lens; emit soft and even direct illumination; SAMSUNG LED with above 90CRI color rendering; available in 2700K, 3000K, 3500K, 4000K; 85% of luminous flux after 50000 hours; cETLus Damp Location listed; universal power supply with 0-10v dimming capability.

**Technical Specifications**

INPUT VOLTAGE	Universal Input AC110-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K
COLOR RENDERING INDEX	90
DISTRIBUTION	Direct
IP RATING	Damp Location
LIFE SPAN	>50,000 Hours
DIMMING	0-10v Dimming



## GLOW SLIM SERIES | GL-S

### SUBMITTAL WORKSHEET

Order Code Example: **GL-S**    **- R2**    **- 35**    **- CM**    **- MW**    **- WH**    **- OPTIONS**  
    **A**                    **B**                    **C**                    **D**                    **E**                    **F**                    **G**

#### **A** SERIES (CHOOSE ONE)

**GL-S**                    Glow Slim Series Round-Shaped Luminaire

#### **B** SIZE & OUTPUT (CHOOSE ONE)

CODE	DISTRIBUTION	POWER & LUMEN		LPW	DIMENSION	SUSPENSION	DRIVER
<b>R1</b>	Direct	15W	1,200lm	80	D12" x H0.9"	3	1
<b>R1.3</b>	Direct	20W	1,600lm	80	D16" x H0.9"	3	1
<b>R1.5</b>	Direct	30W	2,400lm	80	D19" x H0.9"	3	1
<b>R2</b>	Direct	40W	3,200lm	80	D24" x H0.9"	3	1
<b>R3</b>	Direct	90W	7,200lm	80	D36" x H0.9"	3	2
<b>R4</b>	Direct	120W	9600lm	80	D48" x H0.9"	4	3

#### **C** CCT (CHOOSE ONE)

<b>27</b>	2700K	<b>35</b>	3500K
<b>30</b>	3000K	<b>40</b>	4000K

#### **D** MOUNTING (CHOOSE ONE)

**CM**                    5FT Steel Cable, 10-Inch Surface Mount Canopy, Integral Power  
**SM**                    Surface Mount, Integral Power

#### **E** FINISH (CHOOSE ONE)

<b>MB</b>	Black	<b>MS</b>	Silver
<b>MW</b>	White	<b>CC*</b>	Customized Color

\*see Customized Color Chart on pg 3

#### **F** POWER CORD (CHOOSE ONE)

**BK**                    5FT Black Power Cord  
**WH**                    5FT White Power Cord


#### **G** OPTIONS

**blank**                120/277V 0-10V Dimming  
**FAD**                    Customized Output (Consult Factory)


## GLOW SLIM SERIES | GL-S

### DIMENSIONS

SERIES & SIZE	DIMENSION
GL-S-R1	D12" x H0.9"
GL-S-R1.3	D16" x H0.9"
GL-S-R1.5	D19" x H0.9"
GL-S-R2	D24" x H0.9"
GL-S-R3	D36" x H0.9"
GL-S-R4	D48" x H0.9"

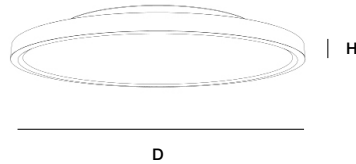

### Canopy Mount

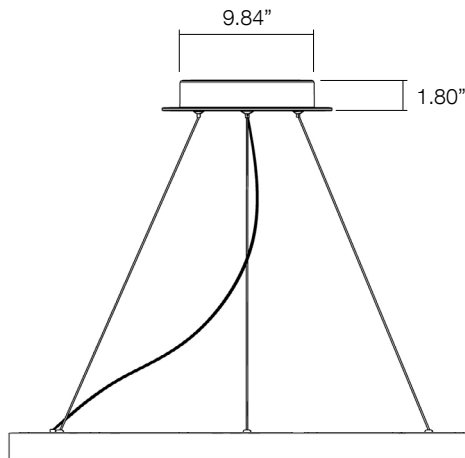

### COLOR CHART (CHOOSE ONE)

CC  
RAL

Specify Color Code:  
Specify RAL Color:



GR - Green



BL - Blue



PP - Purple



PK - Pink



RD - Red



OG - Orange



YW - Yellow



MB - Matte Black



GB - Gloss Black



MW - Matte White



GW - Gloss White



OB - Oil Rubbed Bronze



GZ - Gloss Bronze



MS - Matte Silver



MBS - Matte Brass



GBS - Gloss Brass