


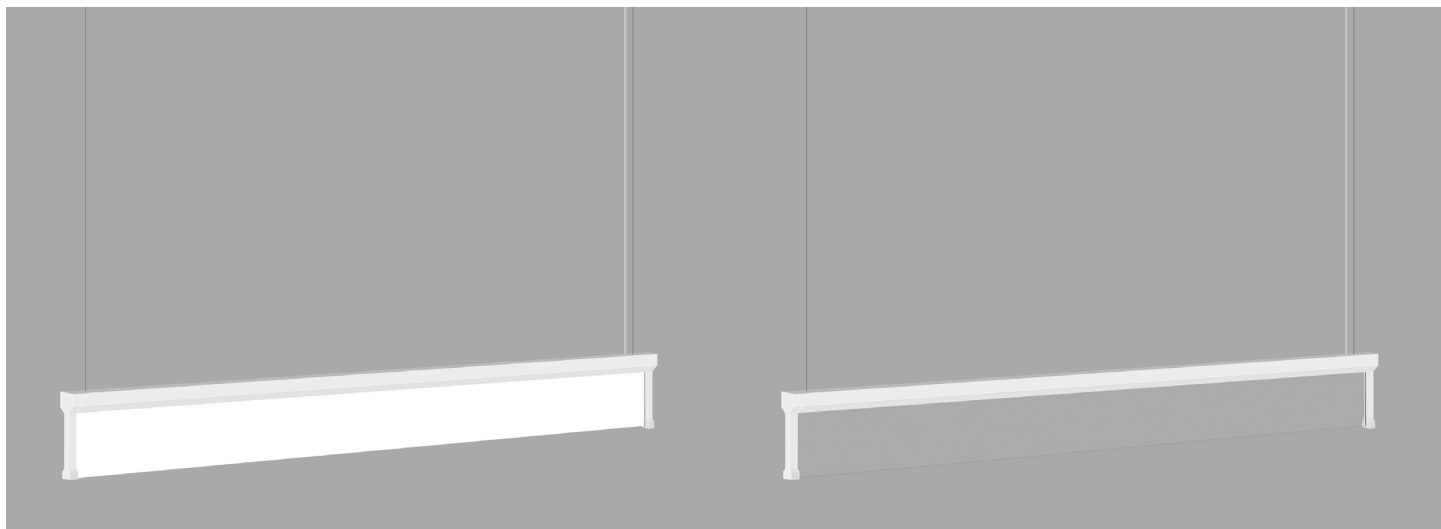

Illuminated

Non-Illuminated

Product Features

LUMI BLADE Series - Suspended version - modern architectural luminaire, ultra-thin transparent optics panel, enveloped in a signature “I-beam” shaped frame. Edgelit illumination creates the “floating” effect. Housing from aluminum extruded profile; available with standard matte White finish; steel cable suspension system through surface canopy; 90CRI; field selectable CCT 3000K ~ 4000K; 88% of luminous flux after 50000 hours; cULus damp location listed; universal power supply 0-10v dimming capability.

Technical Specifications

INPUT VOLTAGE	Universal Input AC120-277V
FREQUENCY	50/60hz
LUMEN	2028 - 4026LM
WATTAGE	20 - 40W
LPW	95 - 102
COLOR TEMPERATURE	Field Selectable CCT 3000K, 3500K, 4000K
COLOR RENDERING INDEX	90+
DISTRIBUTION	Edgelit - Asymmetric distribution
IP RATING	Damp Location
LIFE SPAN	>50,000 Hours
DIMMING	0-10v Dimming





Order Code Example:

LMB	-	L4	-	SC	-	QMR	-	WH	-	OPTIONS
A		B		C		D		E		F

LMB LUMI Blade

CODE		DISTRIBUTION	POWER & LUMEN		LPW	DIMENSION
L2	QS	Edgelit - Asymmetic Distribution	20W	2,028lm	102	L23.64" x W1.59" x H5.34"
L3	QS	Edgelit - Asymmetic Distribution	40W	3,791lm	95	L35.46" x W1.59" x H5.34"
L4	QS	Edgelit - Asymmetic Distribution	40W	4,027lm	102	L47.28" x W1.59" x H5.34"

SC **QS** Field Selectable 3000K / 3500K / 4000K

QMR*	QS	5FT Suspension, 5FT White Power Cord, 4.5-Inch Round J-box Plate & 1.6-Inch Mounting Plate
QMS*	QS	5FT Suspension, 5FT White Power Cord, 4.5-Inch Square J-box Plate & 1.6-Inch Mounting Plate
QMR-T*	QS	5FT Suspension, 5FT White Power Cord, 4.5-Inch Round J-box Plate & 1.6-Inch Mounting Plate with Adjustable T-Bar Clip
QMS-T*	QS	5FT Suspension, 5FT White Power Cord, 4.5-Inch Square J-box Plate & 1.6-Inch Mounting Plate with Adjustable T-Bar Clip

*see pg. 5 for detail

- 4" Octagon box included, adjustable T-bar clip suitable for 9/16" Flat, 9/16" Slot, 15/16" Flat T-bar grid spec


MW QS Matte White

blank		120/277V 0-10V Dimming
BAA		Assembled in America, Compliant with BAA (COTS)
JBP-WH		Flat J-box Coverplate, Matte White Finish
DROP-12		12FT Suspension, 12FT White Power Cord
CLIP-B		Butterfly Clip
-T		Adjustable T-Bar Clip
EMB-H08170*	QS	Self-Diagnostic Emergency Battery 8W 100-347VAC Input 170VDC Output
EMB-H18170*	QS	Self-Diagnostic Emergency Battery 18W 100-347VAC Input 170VDC Output


*see page 4 for spec

LUMI BLADE SERIES | SUSPENDED

DIMENSIONS

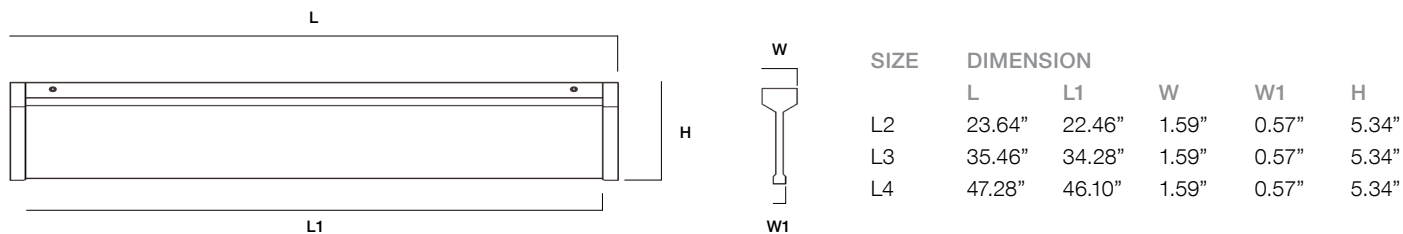


Quick Mount

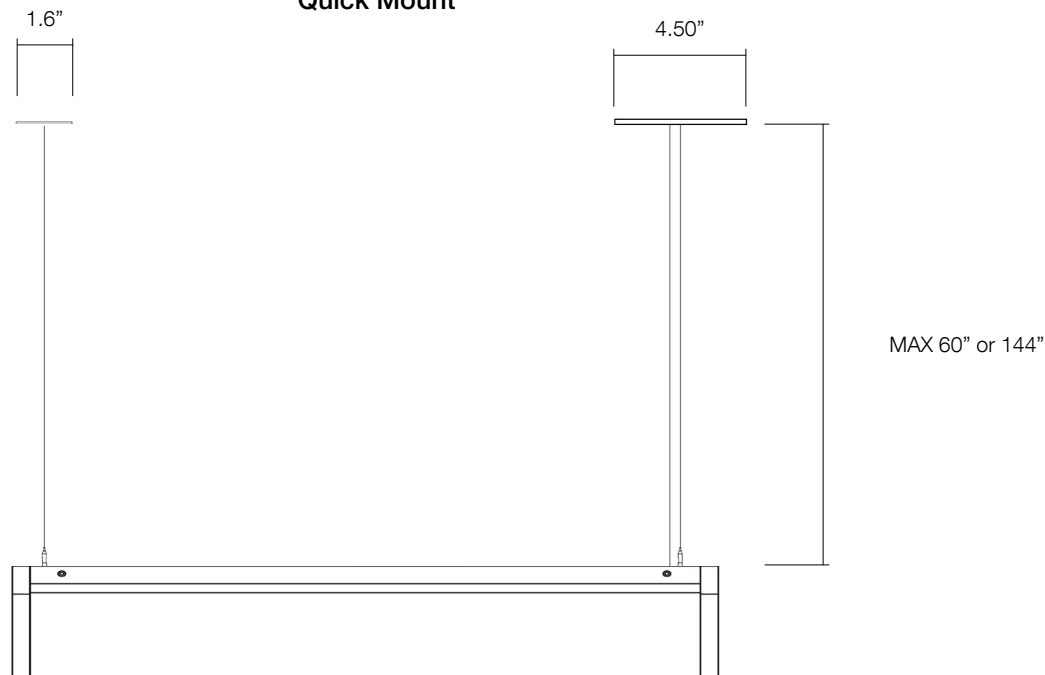

PERFORMANCE


Maximum Candela = 761.1 Located At Horizontal Angle = 270, Vertical Angle = 27
 # 1 - Vertical Plane Through Horizontal Angles (270 - 90) (Through Max. Cd.)
 # 2 - Horizontal Cone Through Vertical Angle (27) (Through Max. Cd.)

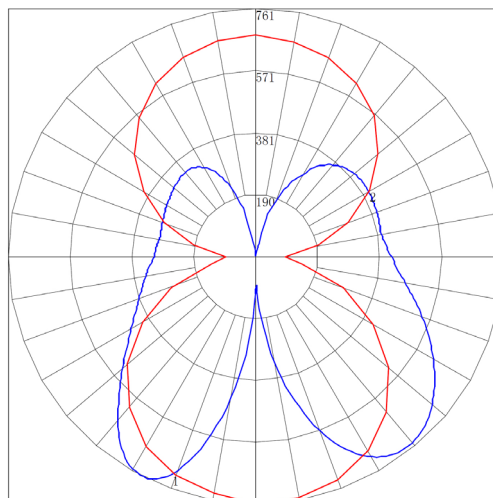

LUMI BLADE SERIES | SUSPENDED

EMB SPEC

Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-H08170	90mins	100-347VAC	170VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Field Install
EMB-H18170	90mins	100-347VAC	170VDC	18W	0°C ~ 50°C 32°F ~ 122°F	Field Install

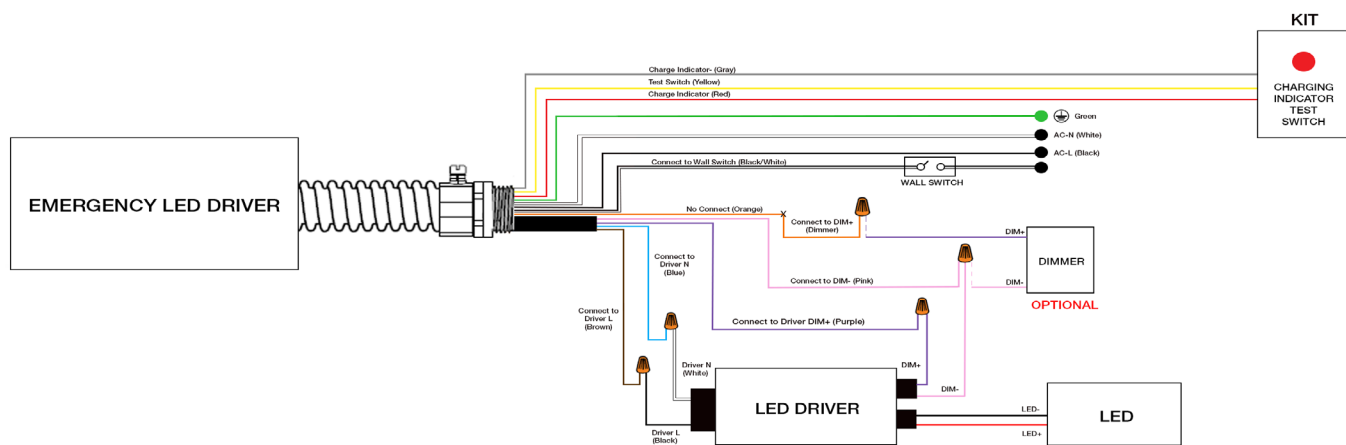


LUMI BLADE SERIES | SUSPENDED

INSTALLATION


Drywall / Ceiling Tile Install

Part# QMR / QMS

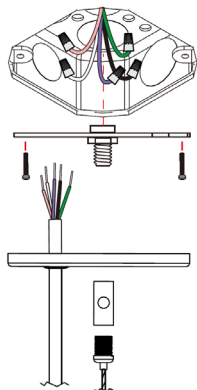


4.5-inch J-box plate
for direct wiring with input & dimming source
J-box plate supports (1) cable suspension

Part# QMR / QMS



1.6-inch mounting plate
with drywall anchor
(1) cable suspension


Optional: Butterfly Clips
Part#CLIP-B



1.6-inch mounting plate
with butterfly clips
(1) cable suspension


T-Grid Install

Part# QMR-T / QMS-T

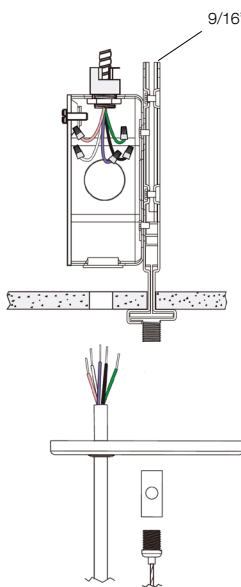

4.5-inch J-box plate
Adjustable T-Bar Clip*
4" Octagon Box included with T-Bar Clip
J-box plate supports (1) cable suspension

Part# QMR-T / QMS-T

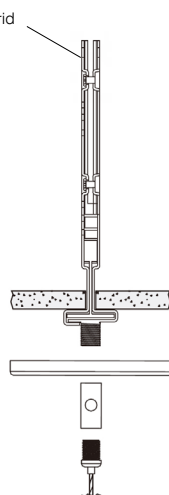

1.6-inch mounting plate
Adjustable T-Bar Clip*
(1) cable suspension

*suitable for 9/16" Flat, 9/16" Slot, 15/16" Flat T-bar grid spec