


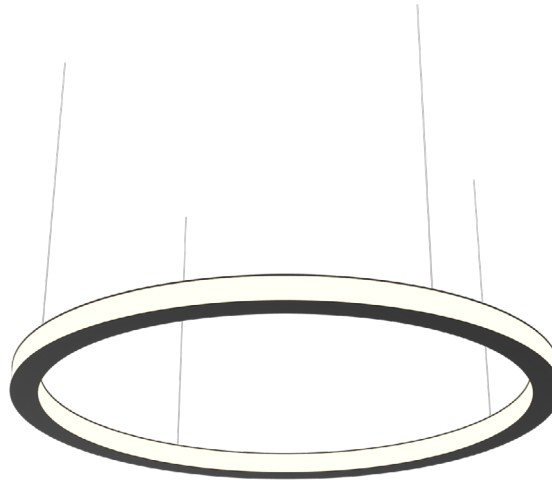

Inner / Outer

Product Features

ALLURE Revolve Series 85 - Ring shaped architectural luminaire housing from rolled aluminum extruded profile, seamlessly welded; available with matte Black, White, Silver or custom RAL finish; offered with steel cable suspension system through surface or direct ceiling mount, entire luminaire homogeneously illuminated, ring shaped frosted PMMA lens; available with inner and outer facing emission; SAMSUNG LED with above 90CRI; available in 2700K, 3000K, 3500K, 4000K, 85% of luminous flux after 50,000 hours; ETL damp location listed; universal power supply with 0-10V dimmable.

Technical Specifications

INPUT VOLTAGE	Universal Input AC120-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K
COLOR RENDERING INDEX	90
DISTRIBUTION	Inner & Outer
IP RATING	Damp Location
LIFE SPAN	>50,000 Hours
DIMMING	0-10v Dimming



REVOLVE SERIES | RV-85

SUBMITTAL WORKSHEET

Order Code Example: **RV-85** **- IO3** **- 40** **- QM** **- MW** **- WH** **- OPTIONS**
 A **B** **C** **D** **E** **F** **G**

A SERIES (CHOOSE ONE)

RV-85 Revolve Series Suspended Ring Shaped Inner and Outer Emitting Luminaire

B SIZE & OUTPUT (CHOOSE ONE)

CODE	DISTRIBUTION	POWER & LUMEN		LPW	DIMENSION	SUSPENSION	DRIVER	SECTION
IO2	Inner / Outer	50W	4,250lm	74	D24" x W1.4" x H1.3"	3	2	1
IO3	Inner / Outer	60W	5,100lm	74	D36" x W1.4" x H1.3"	3	2	1
IO4	Inner / Outer	80W	6,800lm	74	D48" x W1.4" x H1.3"	4	2	1
IO5	Inner / Outer	100W	8,500lm	74	D60" x W1.4" x H1.3"	4	2	1

C CCT (CHOOSE ONE)

27	2700K
30	3000K
35	3500K
40	4000K

D MOUNTING

QM 5FT Steel Cable Direct Mount, 10-Inch/14-Inch Surface Mount Canopy, Integral Driver (Canopy size varies by fixture output)
SM Surface Mount Kit, Remote Driver Enclosure
 *See compatible list on Pg 3

E FINISH

MB Black
MW White
MS Silver
CC* Customized Color

*see Customized Color Chart on pg 3

F POWER CORD (CHOOSE ONE)

BK Standard 5FT Black Power Cord / Specify Length ____ **FT** (Suspension cable length will match)
WH Standard 5FT White Power Cord / Specify Length ____ **FT** (Suspension cable length will match)


G OPTIONS

blank 120/277V 0-10V Dimming
FAD Customized Output (Consult Factory) Specify Lumen
BAA Assembled in America, Compliant with BAA (COTS)

REVOLVE SERIES | RV-85

DIMENSIONS

INNER & OUTER



FIXTURE MODEL

RV-85-IO2
RV-85-IO3
RV-85-IO4
RV-85-IO5

DIMENSION

D24" x W1.4" x H1.3"
D36" x W1.4" x H1.3"
D48" x W1.4" x H1.3"
D60" x W1.4" x H1.3"

MOUNTING CANOPY OPTION

QM, SM
QM, SM
QM, SM
QM, SM

D = Outer Diameter


QM - Quick Mount w/Surface Mount Canopy

FIXTURE

RV-85-IO2
RV-85-IO3
RV-85-IO4
RV-85-IO5

CANOPY SIZE

10"
10"
10"
14"

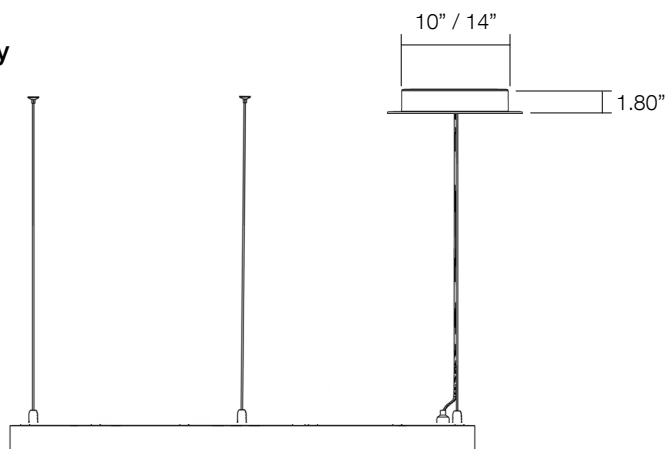

REVOLVE SERIES | RV-85

COLOR CHART (CHOOSE ONE)

CC
RAL

Specify Color Code:
Specify RAL Color:



GR - Green



BL - Blue



PP - Purple



PK - Pink



RD - Red



OG - Orange



YW - Yellow



MB - Matte Black



GB - Gloss Black



MW - Matte White



GW - Gloss White



OB - Oil Rubbed Bronze



GZ - Gloss Bronze



MS - Matte Silver



MBS - Matte Brass



GBS - Gloss Brass



CNH285 - American Walnut



QL0928 - European Cherry



QL0503 - Light Oak



QL0411 - Maple



QL0908 - Palisander Santos