


Direct



Direct
Indirect

Product Features

LUX Series LX2 linear architectural luminaire housing from 2" wide aluminum extruded profile, offered in 2, 4, 5, 6, and 8-FT length profile, available with matte Black, White, Silver or custom RAL finish; steel cable suspension system for direct ceiling mounting, with power supply unit integral inside fixture, and power feed cable through the 5-inch junction box cover plate; entire luminaire homogeneously illuminated, frosted PMMA lens; emits even direct facing illumination characteristic for general illumination and soft indirect for maximum visual comfort; SAMSUNG LED with above 90CRI; available in 2700K, 3000K, 3500K, 4000K; 85% of luminous flux after 50,000 hours; ETL damp location listed; universal power supply with 0-10v dimming capability.

Technical Specifications

| | |
|-----------------------|----------------------------|
| INPUT VOLTAGE | Universal Input AC120-277V |
| FREQUENCY | 50/60hz |
| COLOR TEMPERATURE | 2700, 3000K, 3500K, 4000K |
| COLOR RENDERING INDEX | 90 |
| DISTRIBUTION | Direct, Direct/Indirect |
| IP RATING | Damp Location |
| LIFE SPAN | >50,000 Hours |
| DIMMING | 0-10v Dimming |




DIMENSIONS

Cross Section

| SERIES & SIZE | DIMENSION | Section | |
|---------------|--------------------|---------|---|
| LX2-L2 | L24" x W2" x H3" | 1 |  <p>H</p> <p>W</p> |
| LX2-L4 | L48" x W2" x H3" | 1 | |
| LX2-L5 | L60" x W2" x H3" | 1 | |
| LX2-L6 | L72" x W2" x H3" | 1 | |
| LX2-L8 | L96" x W2" x H3" | 1 | |
| LX2-IL2 | L24" x W2" x H3.5" | 1 |  <p>H</p> <p>W</p> |
| LX2-IL4 | L48" x W2" x H3.5" | 1 | |
| LX2-IL5 | L60" x W2" x H3.5" | 1 | |
| LX2-IL6 | L72" x W2" x H3.5" | 1 | |
| LX2-IL8 | L96" x W2" x H3.5" | 1 | |

Custom Length Consult Factory

Quick Mount

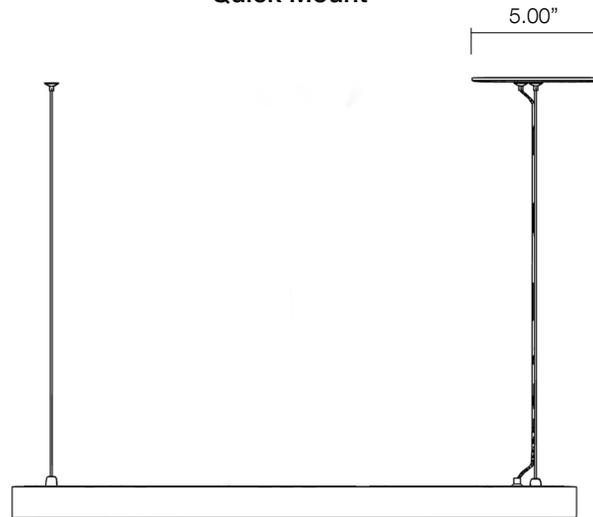

Surface Mount




LUX SERIES | LX2

COLOR CHART (CHOOSE ONE)

CC
RAL

Specify Color Code:
Specify RAL Color:

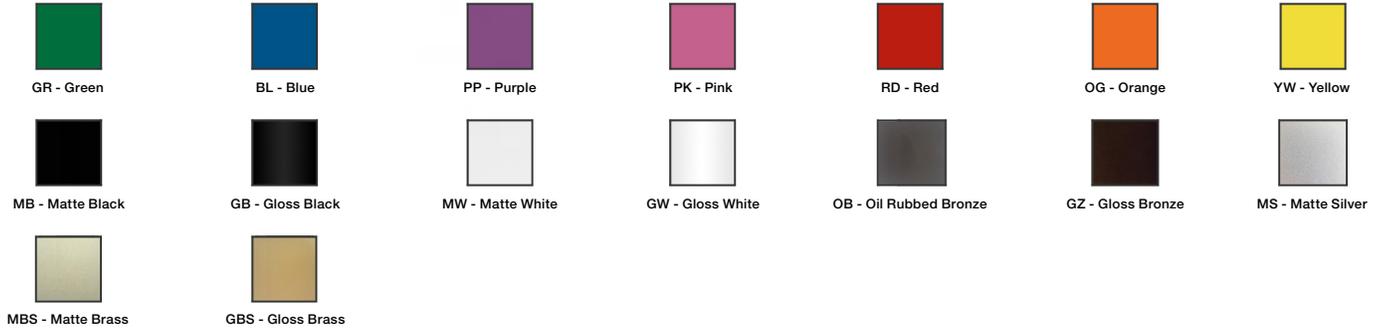

EMB SPEC

| Model | Battery Capacity | Input | Output | Output Power | Operating Temp | Installation |
|---------|------------------|------------|----------|--------------|----------------------------|-----------------|
| LX2-EMB | 90mins | 100-347VAC | 25-58VDC | 8W | 0°C ~ 50°C 32°F ~ 122°F | Factory Install |

