



Inner



Outer

Product Features

ALLURE Revolve Series 84 - Ring shaped architectural luminaire housing from rolled aluminum extruded profile, seamlessly welded; available with matte Black, White, Silver or custom RAL finish; offered with steel cable suspension system through surface canopy or direct ceiling mount, entire luminaire homogeneously illuminated, ring shaped frosted PMMA lens; available with inner or outer facing emission; SAMSUNG LED with above 90CRI; available in 2700K, 3000K, 3500K, 4000K, RGBW and Tunable White; 85% of luminous flux after 50,000 hours; ETL damp location listed; universal power supply with 0-10V dimmable or optional ELV dimmable capability.

Technical Specifications

INPUT VOLTAGE	Universal Input AC120-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K, RGBW, Tunable White
COLOR RENDERING INDEX	90
DISTRIBUTION	Inner, Outer
IP RATING	Damp Location
LIFE SPAN	>50,000 Hours
DIMMING	0-10v Dimming



REVOLVE SERIES | RV-84

SUBMITTAL WORKSHEET

Order Code Example: **RV-84** **- IN3** **- 40** **- CM** **- MW** **- WH** **- OPTIONS**

A B C D E F G

A SERIES (CHOOSE ONE)

RV-84 Revolve Series Suspended Ring Shaped Side Emitting Luminaire

B SIZE & OUTPUT (CHOOSE ONE)

CODE	DISTRIBUTION	POWER & LUMEN		LPW	DIMENSION	SUSPENSION	DRIVER	SECTION
IN2	Inner	32W	2,348lm	74	D24" x W1.4" x H1.3"	3	1	1
IN3	Inner	40W	2,935lm	74	D36" x W1.4" x H1.3"	3	1	1
IN4	Inner	70W	5,136lm	74	D48" x W1.4" x H1.3"	4	2	1
IN5	Inner	80W	5,870lm	74	D60" x W1.4" x H1.3"	4	2	1
OU2	Outer	32W	2,348lm	74	D24" x W1.4" x H1.3"	3	1	1
OU3	Outer	40W	2,935lm	74	D36" x W1.4" x H1.3"	3	1	1
OU4	Outer	70W	5,136lm	74	D48" x W1.4" x H1.3"	4	2	1
OU5	Outer	80W	5,870lm	74	D60" x W1.4" x H1.3"	4	2	1

C CCT (CHOOSE ONE)

27	2700K
30	3000K
35	3500K
40	4000K
RGBW*	Red, Green, Blue, White - Mix LED
TW*	Tunable White *Custom-build please consult factory

D MOUNTING

CM*	5FT Steel Cable, 10-Inch/14-Inch Surface Mount Canopy, Integral Driver (Canopy size varies by fixture output)
CM2*	5FT Steel Cable, 11-Inch/14-Inch Surface Mount Canopy, Integral Driver (Canopy size varies by fixture output)
QM*	5FT Steel Cable Direct Mount, 10-Inch/14-Inch Surface Mount Canopy, Integral Driver (Canopy size varies by fixture output)

*See compatible list on Pg 3~4

E FINISH

MB	Black
MW	White
MS	Silver
CC*	Customized Color

*see Customized Color Chart on Pg 3

F POWER CORD (CHOOSE ONE)

BK	Standard 5FT Black Power Cord / Specify Length ____ FT (Suspension cable length will match)
WH	Standard 5FT White Power Cord / Specify Length ____ FT (Suspension cable length will match)

G OPTIONS

blank	120/277V 0-10V Dimming
CMP	Compatible with QM option, 10-Inch Surface Mount Canopy, Integral Power Included (120/277V 0-10V DIMMING)
FAD	Customized Output (Consult Factory) Specify Lumen
BAA	Assembled in America, Compliant with BAA (COTS)

REVOLVE SERIES | RV-84

DIMENSIONS

INNER



H

FIXTURE MODEL

RV-84-IN2
RV-84-IN3
RV-84-IN4
RV-84-IN5

DIMENSION

D24" x W1.4" x H1.3"
D36" x W1.4" x H1.3"
D48" x W1.4" x H1.3"
D60" x W1.4" x H1.3"
D = Outer Diameter

MOUNTING CANOPY OPTION

CM-10", CM2-11", QM, SM
CM-10", CM2-11", QM, SM
CM-10", CM2-11", QM, SM
CM-14", CM2-14", QM, SM

OUTER



H

FIXTURE MODEL

RV-84-OU2
RV-84-OU3
RV-84-OU4
RV-84-OU5

DIMENSION

D24" x W1.4" x H1.3"
D36" x W1.4" x H1.3"
D48" x W1.4" x H1.3"
D60" x W1.4" x H1.3"
D = Outer Diameter

MOUNTING CANOPY OPTION

CM-10", CM2-11", QM, SM
CM-10", CM2-11", QM, SM
CM-10", CM2-11", QM, SM
CM-14", CM2-14", QM, SM


MOUNTING OPTIONS

CM - Canopy Mount

FIXTURE CANOPY SIZE

RV-82-D2	10"
RV-82-D3	10"
RV-82-D4	10"
RV-82-D5	14"
RV-82-D6.5	14"

RV-82-UD2	10"
RV-82-UD3	10"
RV-82-UD4	10"
RV-82-UD5	14"
RV-82-UD6.5	14"

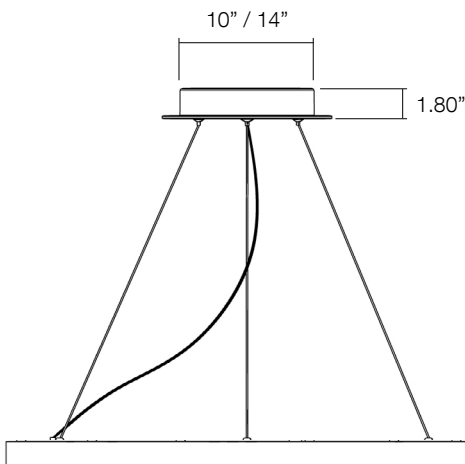


CM2 - Canopy Mount w/Center Ring


FIXTURE CANOPY SIZE

RV-82-D2	11"
RV-82-D3	11"
RV-82-D4	11"
RV-82-D5	14"
RV-82-D6.5	14"

RV-82-UD2	11"
RV-82-UD3	11"
RV-82-UD4	11"
RV-82-UD5	14"
RV-82-UD6.5	14"

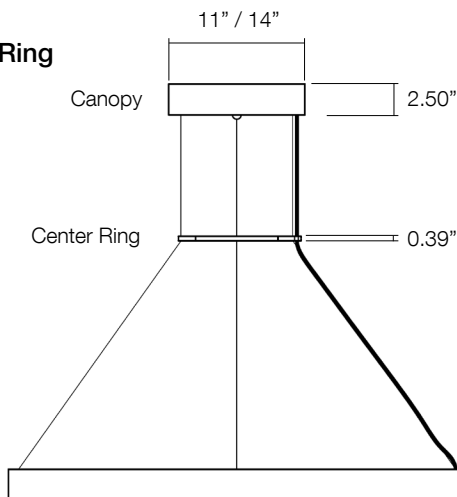


ø11.02" (ø280mm)




11" Surface Mount Canopy

ø9.45" (ø240mm)




Center Ring w/Single Wire Hole

ø13.78" (ø350mm)



14" Surface Mount Canopy

ø12.20" (ø310mm)




Center Ring w/Double Wire Hole

REVOLVE SERIES | RV-84

MOUNTING OPTIONS

QM - Quick Mount w/Surface Mount Canopy

FIXTURE	CANOPY SIZE
RV-84-IN2	10"
RV-84-IN3	10"
RV-84-IN4	10"
RV-84-IN5	14"
RV-84-OU2	10"
RV-84-OU3	10"
RV-84-OU4	10"
RV-84-OU5	14"

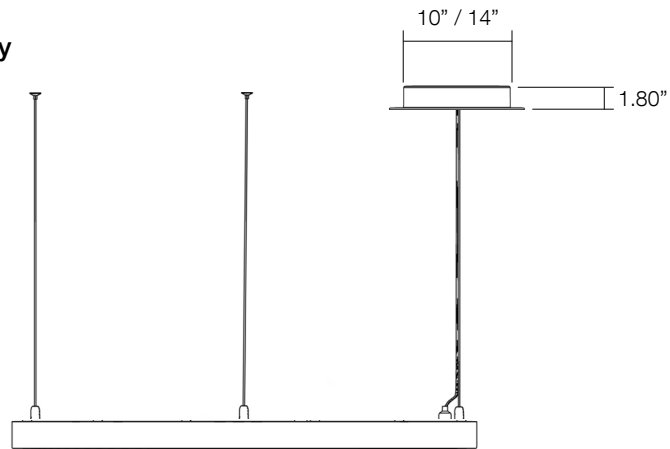

REVOLVE SERIES | RV-84

COLOR CHART (CHOOSE ONE)

CC
RAL

Specify Color Code:
Specify RAL Color:



GR - Green



BL - Blue



PP - Purple



PK - Pink



RD - Red



OG - Orange



YW - Yellow



MB - Matte Black



GB - Gloss Black



MW - Matte White



GW - Gloss White



OB - Oil Rubbed Bronze



GZ - Gloss Bronze



MS - Matte Silver



MBS - Matte Brass



GBS - Gloss Brass



CNH285 - American Walnut



QL0928 - European Cherry



QL0503 - Light Oak



QL0411 - Maple



QL0908 - Palisander Santos