


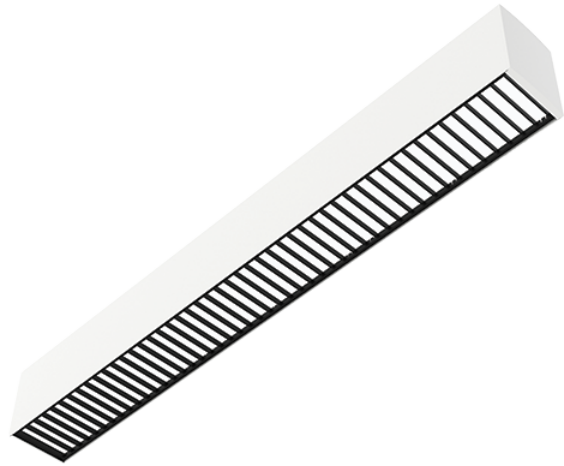

Product Features

Lumina architectural linear louver fixture delivers premium performance, customizable looks, and effortless control, with standard and Hex louver lens options to support both aesthetic and visual comfort requirements. Housing from a 2.5" wide aluminum extruded profile, available in a 2, 4, 6 and 8-FT length with black and white finish options; integral driver, die-cast aluminum endcaps with magnetic interface; optional continuous rolling lens up to 40FT; field selectable distribution options; >80CRI standard, optional >90CRI LED; field selectable CCT in 2700K / 3000K / 3500K / 4000K / 5000K; LED lifespan greater than 100,000 hours; cULus damp location listed; universal input 120-277V dimming power supply for 0-10V dimming protocol.

Technical Specifications

INPUT VOLTAGE	Universal Input 120-277 VAC
FREQUENCY	50/60hz
COLOR TEMPERATURE	Field Selectable 2700K / 3000K / 3500K / 4000K / 5000K
COLOR RENDERING INDEX	>80, >90
DISTRIBUTION	Direct/Indirect, Field Selectable Output
IP RATING	Damp Location
LIFE SPAN	>100,000 Hours
DIMMING	0-10V Dimming, 0-100% Dimming Range





Order Code Example: LMA - L2 - 9SC - HL - BK - UD

 A B C D E F

LMA Lumina Architectural Linear



CODE		LENGTH	POWER	DISTRIBUTION RATIO FIELD SELECTABLE*
L2	QS	2FT	Field Selectable 10W / 15W / 20W	Direct 100%
L4	QS	4FT	Field Selectable 20W / 30W / 40W	Direct 100%
L8	QS	8FT	Field Selectable 40W / 60W / 80W	Direct 100%
CODE		LENGTH		
IL2	QS	2FT	Field Selectable 10W / 15W / 20W	100%, 70%/30%, 50%/50%, 30%/70%, 100%
IL4	QS	4FT	Field Selectable 20W / 30W / 40W	100%, 70%/30%, 50%/50%, 30%/70%, 100%
IL8	QS	8FT	Field Selectable 40W / 60W / 80W	100%, 70%/30%, 50%/50%, 30%/70%, 100%

8SC	QS	80 CRI Field Selectable 2700K / 3000K / 3500K / 4000K / 5000K (standard)
9SC		90 CRI Field Selectable 2700K / 3000K / 3500K / 4000K / 5000K

L	Louver
HL	Hex Louver

L - Louver

HL - Hex Louver

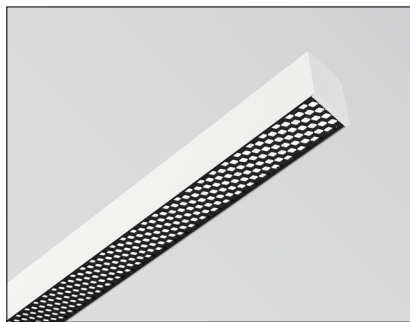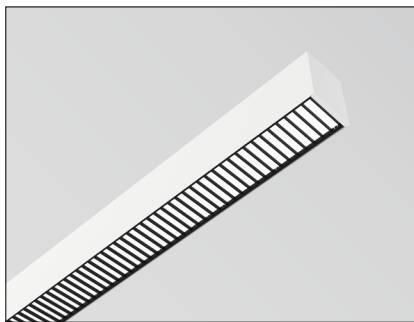

BK	QS	Black
WH	QS	White

UD **QS** 120-277V, 0-10V Dimming with 0-100% Dimming Range

LUMINA SERIES | LOUVER

SUBMITTAL WORKSHEET

Order Code Example: LMA-QM-12FT-BK

G

G MOUNTING (CHOOSE ONE)

LMA-QM-__-__	QS	5-Wire Cord Aircraft Cable, 5" J-Box Cover Plate. Specify Cable Length: 6FT / 12FT , Specify Cord Finish: BK : Black / WH : White
LMA-QMT-__-__	QS	5-Wire Cord Aircraft Cable for T-Grid Ceiling, 5" J-Box Cover Plate. Specify Cable Length: 6FT / 12FT , Specify Cord Finish: BK : Black / WH : White
LMA-QME-__-__	QS	6-Wire Cord Aircraft Cable, 5" J-Box Cover Plate, for Emergency Battery Specify Cable Length: 6FT / 12FT , Specify Cord Finish: BK : Black / WH : White
LMA-QMET-__-__	QS	6-Wire Cord Aircraft Cable for T-Grid Ceiling, 5" J-Box Cover Plate for Emergency Battery Specify Cable Length: 6FT / 12FT , Specify Cord Finish: BK : Black / WH : White
LMA-SM	QS	Surface Mount Kit (SUITABLE FOR DIRECT DISTRIBUTION ONLY)
LMA-REC	QS	Recessed
LMA-REC-TR	QS	Trimless Recessed
LMA-REC-TBAR	QS	T-Grid Recessed
LMA-WM	QS	Wall Mount
QM-ACKIT	QS	Quick Mount Aircraft Cable Kit

LMA-QM, LMA-QME
Quick Mount

LMA-QMET, LMA-QMT
Quick Mount


LMA-SM
Surface Mount





LMA-REC-TR
Trimless Recessed

LMA-REC
Trimless Visible Recessed

LMA-REC-TBAR
T-Grid Recessed

LMA-WM
Wall Mount

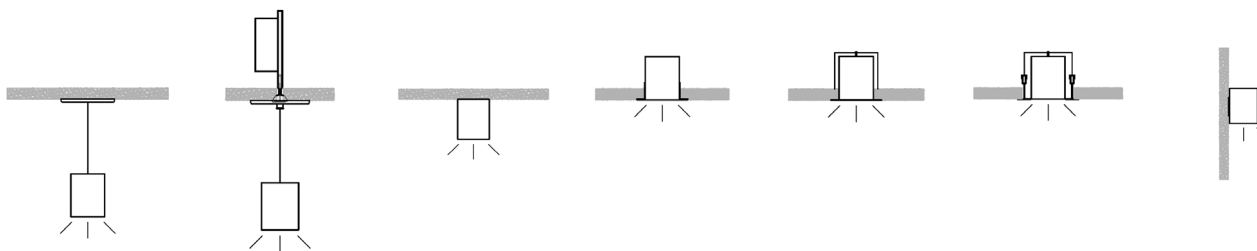

LMA-QM 	LMA-QMT 	LMA-QME 	LMA-QMET 	LMA-SM 
LMA-REC 	LMA-REC-TR 	LMA-REC-TBAR 	LMA-WM 	



Order Code Example: LMA-CON - EMB-H018170
 H H

BAA		Assembled in America, Compliant with BAA (COTS)
LMA-CON	QS	LMA Profile Inline Joiner (metal bracket)
LMA-L-CON*	QS	LMA Profile “L” 90° Connector
LMA-T-CON*	QS	LMA Profile “T” 90° Connector
LMA-X-CON*	QS	LMA Profile “X” 90° Connector
LMA-Y-CON*	QS	LMA Profile “Y” 120° Connector
LMA-V-CON*	QS	LMA Profile “V” 120° Connector
LENS-LMA-40	QS	Continuous Diffuser Rolling Lens Up to 40FT.
SENSOR-KIT-IFS06R**	QS	Integral PIR on/off/dimming/photosensing (14V DC Power by Driver)
EMB-8W-B**	QS	90-Minute Self-Diagnostic Emergency Battery 8W 100-347VAC Input 170VDC Output

**see page 10 and 11 for emb and sensor spec

Page 4 of 17


LUMINA SERIES | LOUVER

DIMENSIONS - FIXTURE

Size	L	W	H
2FT	23.62"	2.48"	3.15"
4FT	47.24"		
8FT	94.49"		

Continuous Run

120VAC: Connections up to 40FT.
277VAC: Connections up to 100FT.

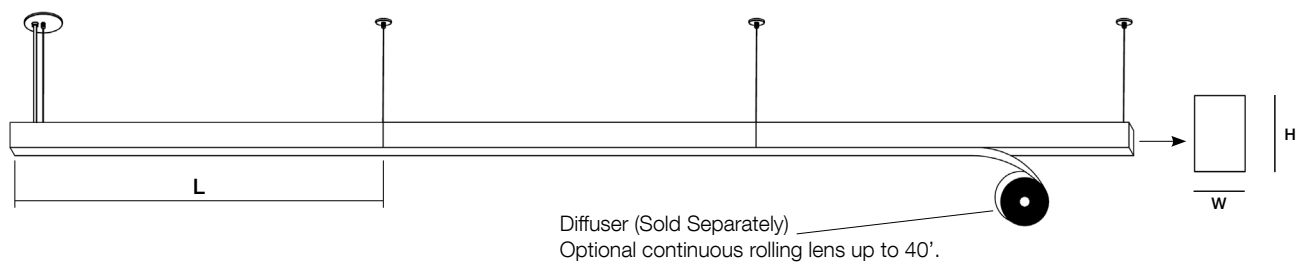

PERFORMANCE DATA

SIZE	SETTING	WATTAGE	2700K		3000K		3500K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
2FT	Lv 1	20W	2500	125	2500	125	2700	135	2700	135	2600	130
	Lv 2	15W	1875	125	1875	125	2025	135	2025	135	1950	130
	Lv 3	10W	1250	125	1250	125	1350	135	1350	135	1300	130
4FT	Lv 1	40W	5000	125	5000	125	5400	135	5400	135	5200	130
	Lv 2	30W	3750	125	3750	125	4050	135	4050	135	3900	130
	Lv 3	20W	2500	125	2500	125	2700	135	2700	135	2600	130
8FT	Lv 1	80W	10000	125	10000	125	10800	135	10800	135	10400	130
	Lv 2	60W	7500	125	7500	125	8100	135	8100	135	7800	130
	Lv 3	40W	5000	125	5000	125	5400	135	5400	135	5200	130

OUTPUT

Fixed CCT

2700K, 3000K, 3500K, 4000K, 5000K

90+ CRI 

Selectable Wattage



Lv1




Lv2




Lv3




Selectable Light Distribution




100% Direct




30% Indirect
70% Direct



50% Indirect
50% Direct



70% Indirect
30% Direct




100% Indirect

LUMINA SERIES | LOUVER

PHOTOMETRIC


IES: LMA-L4 D-100% @ 4000K 40W



Zone	Lumen	Luminaire%
0-30	1198	26.90
0-40	1962	44.00
0-60	3480	78.10
0-90	4457	100
0-180	4457	100

Lumen: 4457
Input Watts: 40 W
Efficacy: 111 LPW

IES: LMA-L2 D-100% @ 4000K 20W



Zone	Lumen	Luminaire%
0-30	654	27.90
0-40	1064	45.30
0-60	1862	79.30
0-90	2348	100
0-180	2348	100

Lumen: 2348
Input Watts: 20 W
Efficacy: 117 LPW



Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-8W-B	90mins	100-347VAC	170VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Field Install



SENSOR-KIT-IFS06R

FEATURE

- **Installation:** Factory Install - Sensor Integral to Fixture
- **Commissioning:** through Remote Control
- **Control:** Adjustable Hold Time, Bi-Level Dimming, Manual/Auto - On/Off
- **Sensor:** Motion (Occupancy/Vacancy/Manual) and Daylight Harvesting




SPECIFICATIONS


SENSOR TYPE:	Passive Infrared Sensor (PIR)
INPUT VOLTAGE:	10-14VDC, >50mA
LIGHT-CONTROL:	Daylight Harvesting with Automatic Dimming
CONTROL OUTPUT:	0-10V, Max. 25mA sinking current
OPERATING TEMP:	-4°F ~ +140°F (-20°C ~ +60°C)

COMMISSIONING RANGE:	50FT from Remote Control
TIME SETTING:	10sec ~ 60min (adjustable)
DETECTION ANGLE:	360°
MOUNTING HEIGHT:	12FT Max.
WARRANTY:	5 years
IP RATING:	IP20

DIMENSIONS

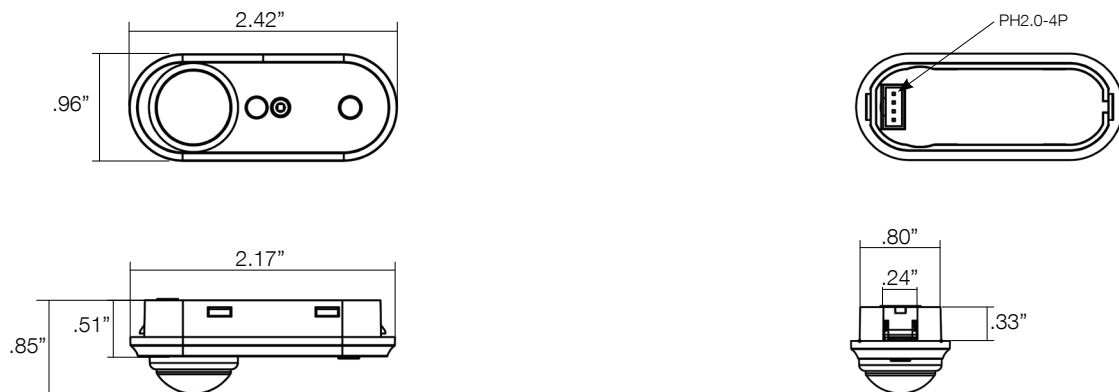

COVERAGE PATTERNS

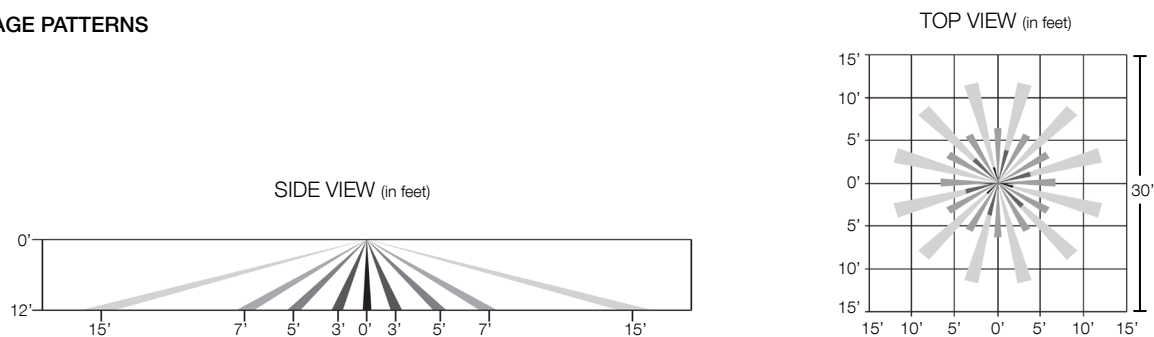

ORDER CODE

EXAMPLE: SENSOR-KIT-IFS06R


A

SERIES



SENSOR-KIT-IFS06R Integral PIR on/off/dimming/photosensing (14V DC Power by Driver)

INSTALLATION

LMA-QM / LMA-QME - Quick Mount Installation

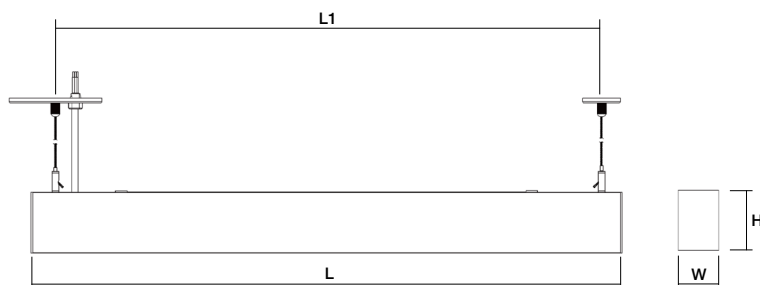


LMA				
Size	L	W	H	L1 - Installation Spacing
2FT	23.82"	2.48"	3.15"	14.17"-22.05"
4FT	47.44"			37.80"-45.67"
6FT	71.06"			61.42"-69.30"
8FT	94.67"			85.03"-92.91"

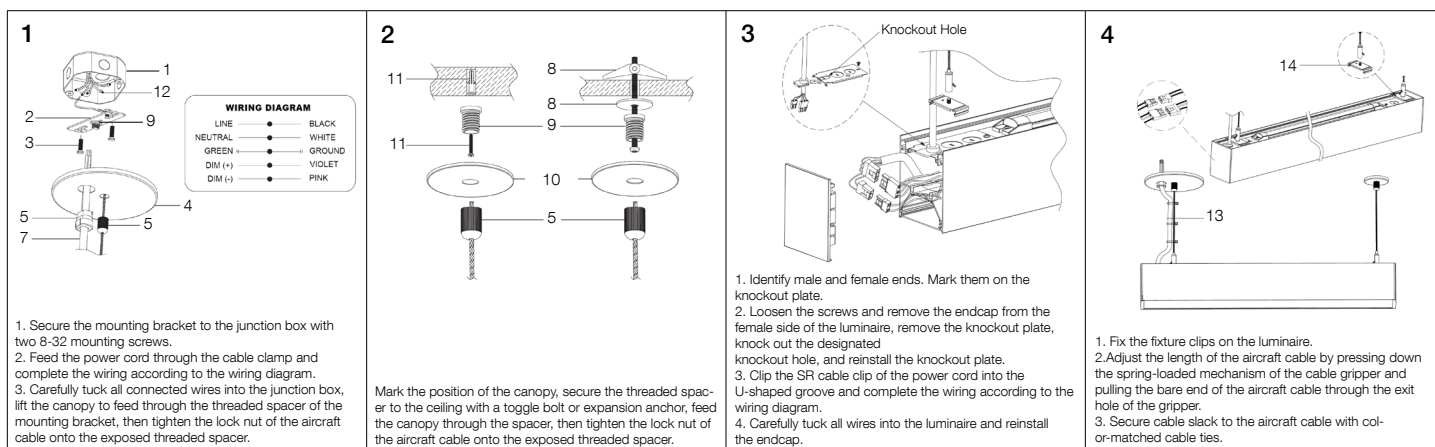
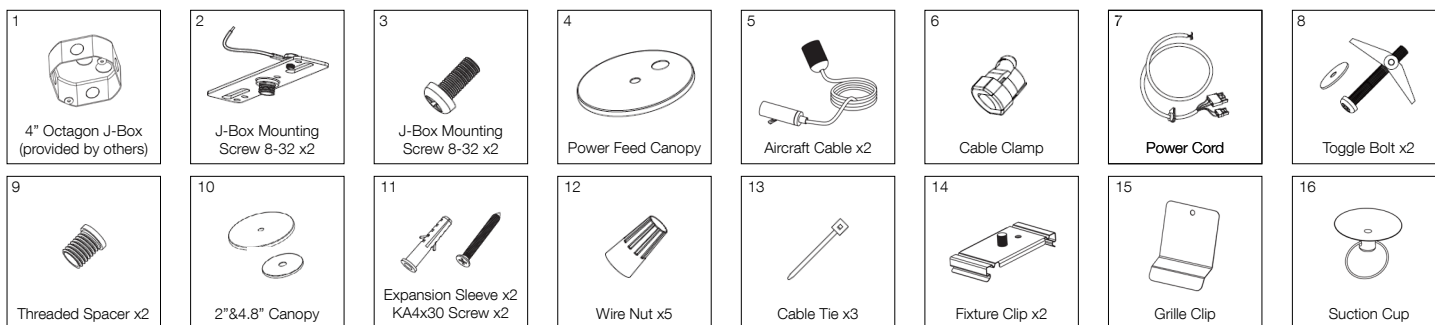


INSTALLATION

LMA-QMT / LMA-QMET - T-Grid Quick Mount Installation

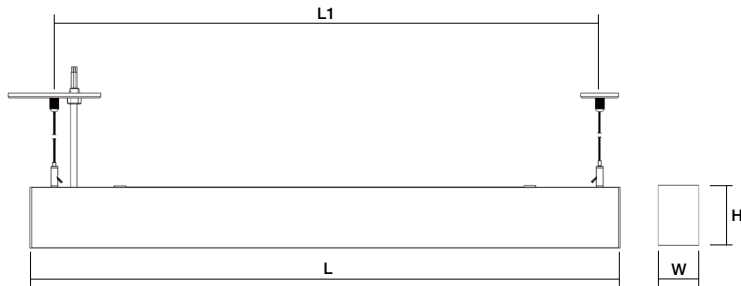


LMA				
Size	L	W	H	L1 - Installation Spacing
2FT	23.82"	2.48"	3.15"	14.17"-22.05"
4FT	47.44"			37.80"-45.67"
6FT	71.06"			61.42"-69.30"
8FT	94.67"			85.03"-92.91"

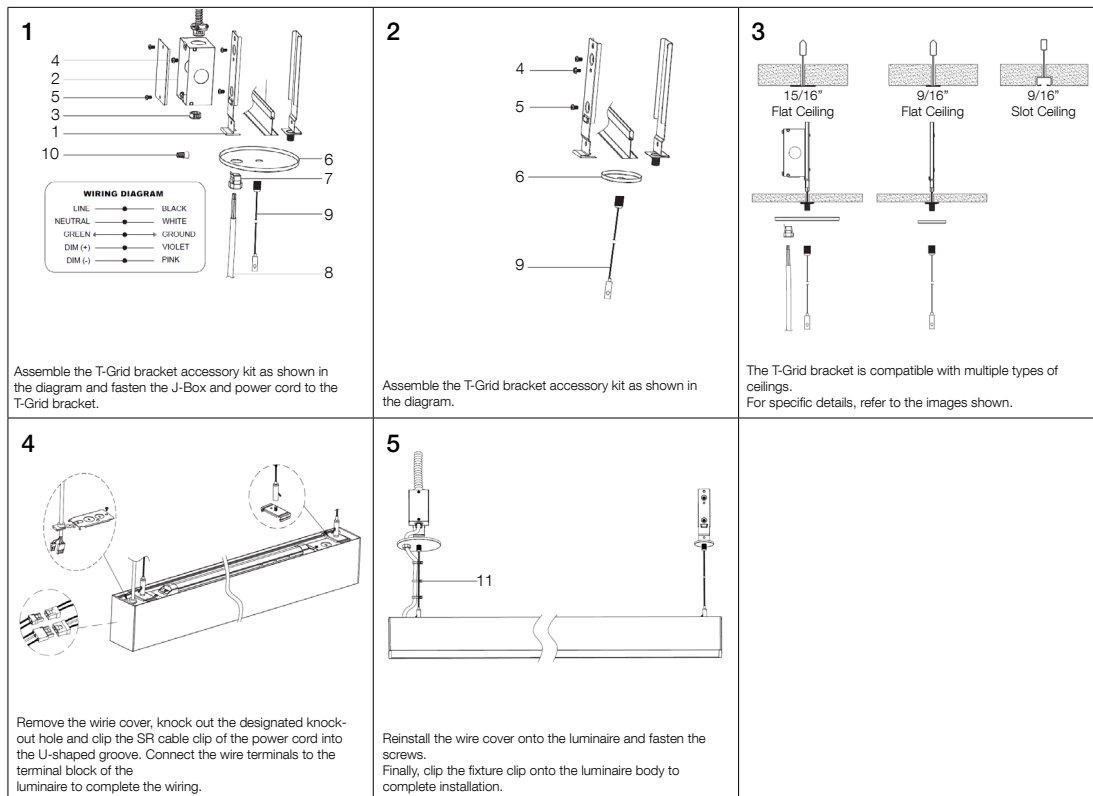
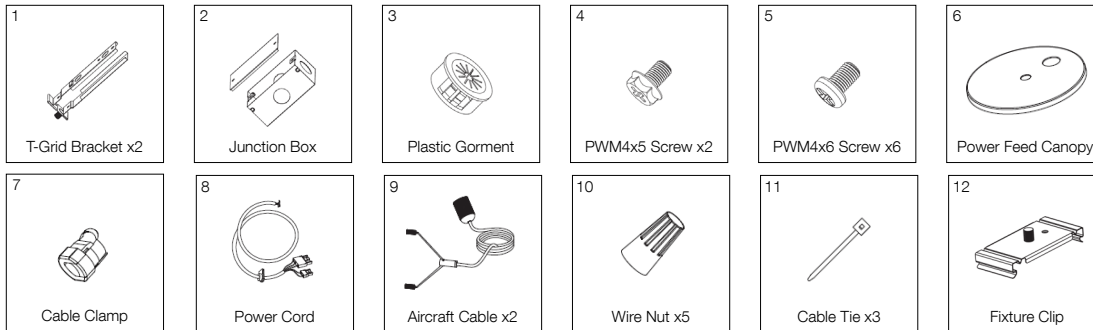


INSTALLATION

LMA-SM - Surface Mount Installation

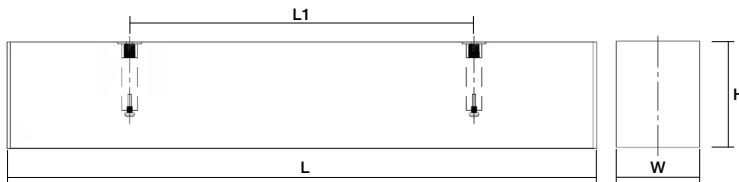


LMA				
Size	L	W	H	L1 - Installation Spacing
2FT	23.82"	2.48"	3.15"	14.17"
4FT	47.44"			37.80"
6FT	71.06"			61.42"
8FT	94.67"			85.03"

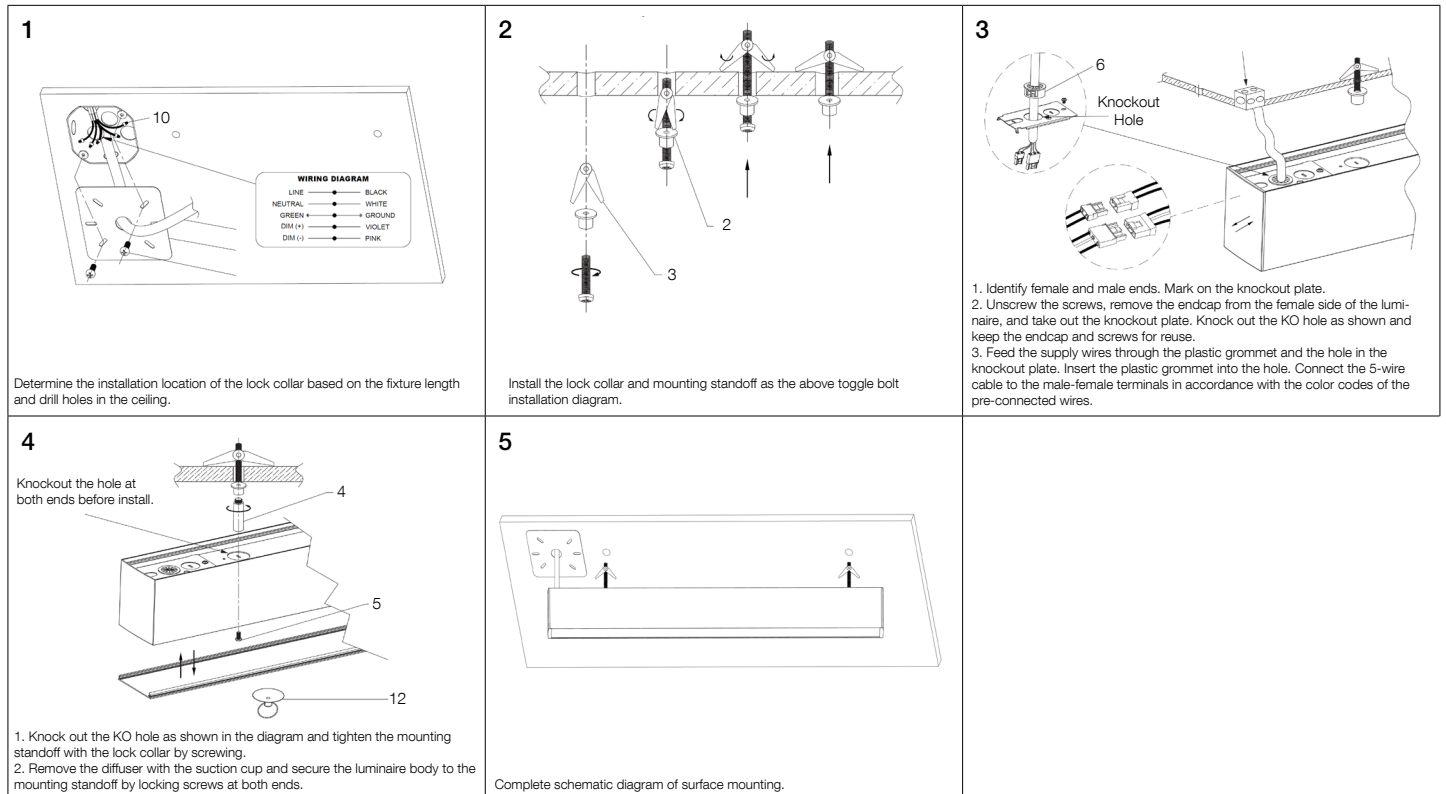
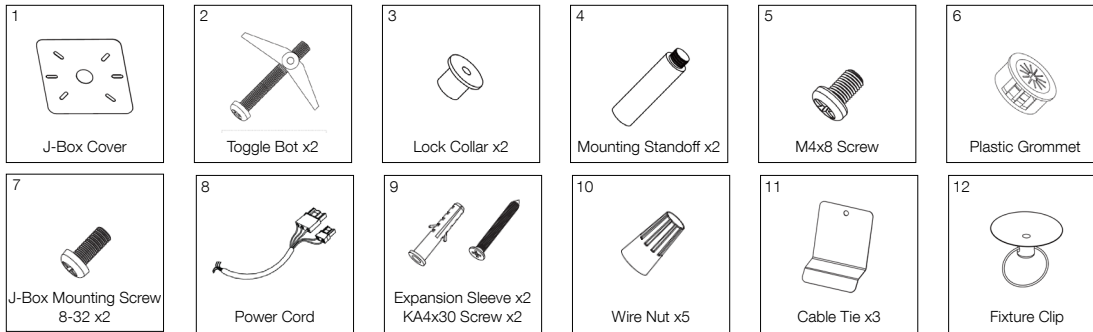


INSTALLATION

LMA-WM - Wall Mount Installation

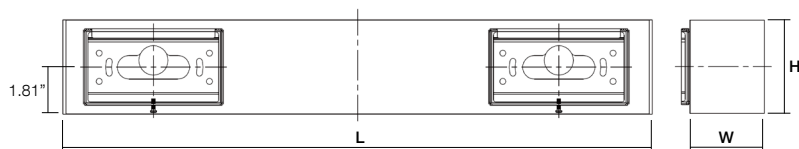


LMA				
Size	L	W	H	L1 - Installation Spacing
2FT	23.82"	2.48"	3.15"	13.78"
4FT	47.44"			41.33"
6FT	71.06"			64.96"
8FT	94.67"			88.58"


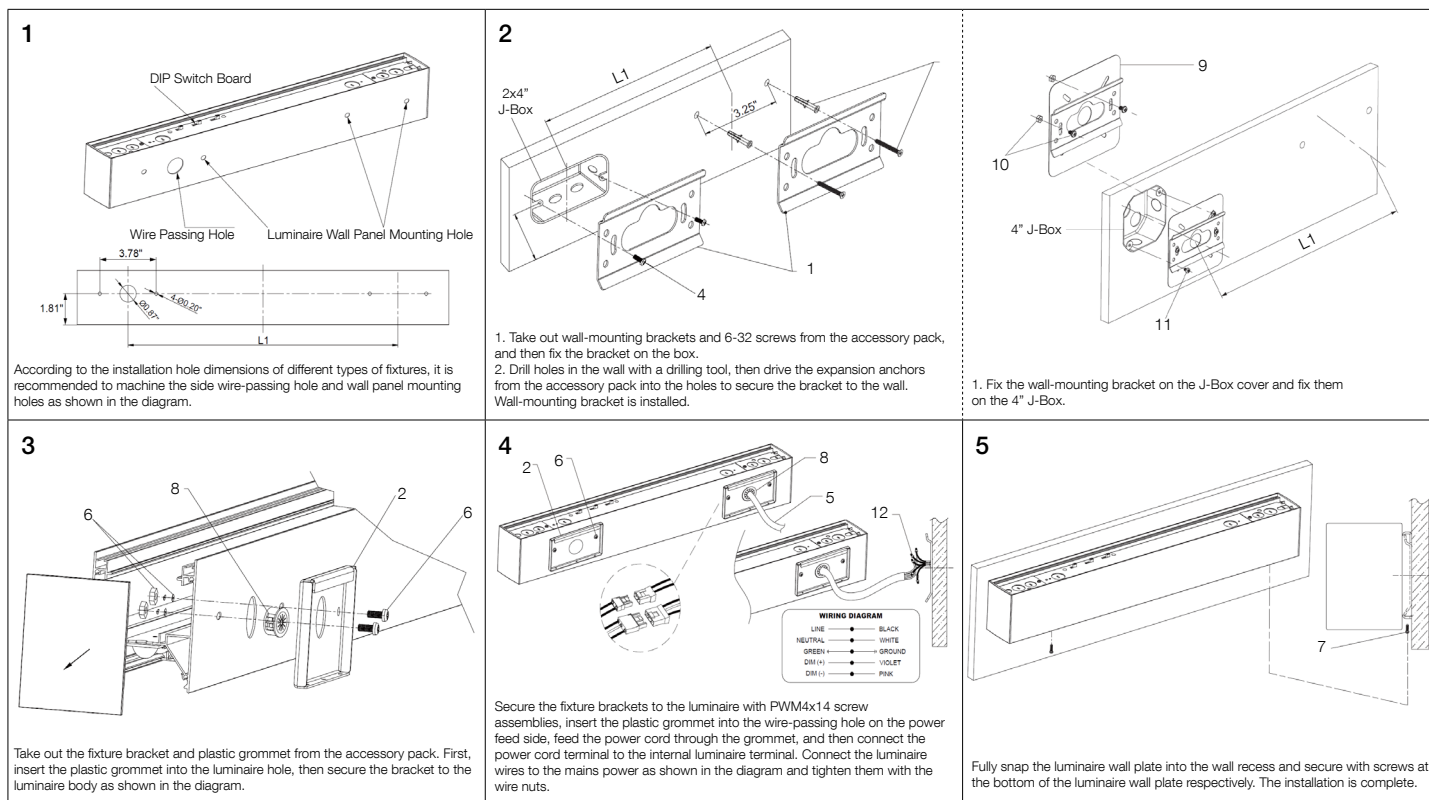
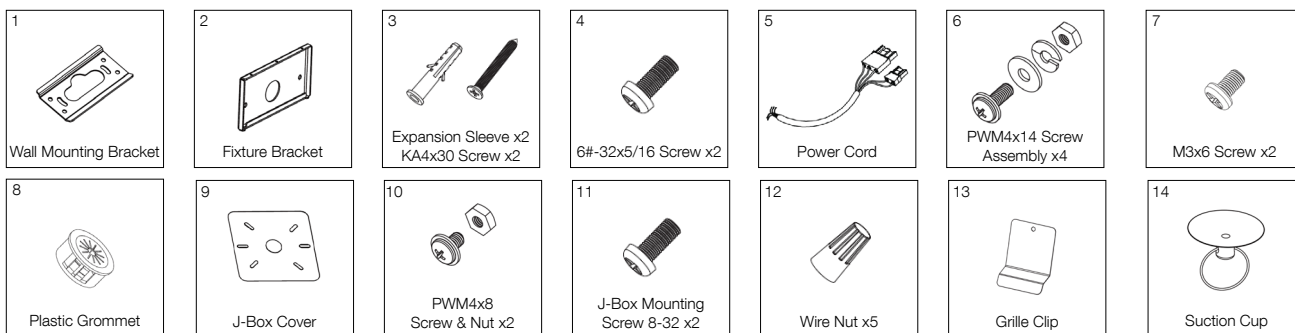


INSTALLATION


LMA-REC-TBAR - T-Grid Recessed Installation

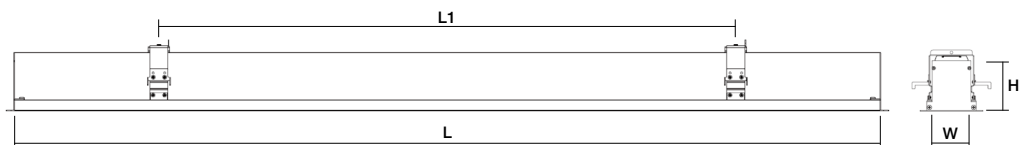

LMA-REC-TBAR						
Size	L	W	H	L1 - Installation Spacing	T-Grid Install Spacing (Vertical)	T-Grid Install Spacing (Horizontal)
2FT	23.82"	2.48"	3.15"	13.78"	24"	4.35"
4FT	47.44"			41.33"	48"	4.35"
8FT	94.67"			88.58"	96"	4.35"




LMA-2FT Recessed Trimmed Mounting Rail




LMA-4FT Recessed Trimmed Mounting Rail




LMA-8FT Recessed Trimmed Mounting Rail

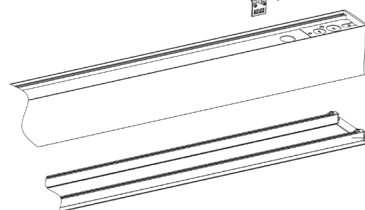


Mounting Rail

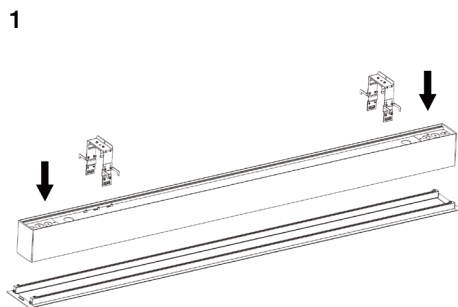

Fix the fixture together with the recessed trimmed mounting rail and the fixture fixing bracket.
(Note: The endcaps of the 2ft luminaire need to be removed first.)

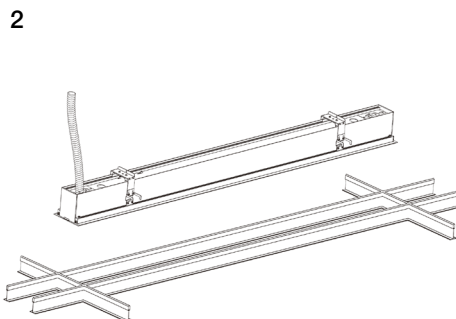


Connect the AC cable of the luminaire to the mains power and place the luminaire into the ceiling grid.

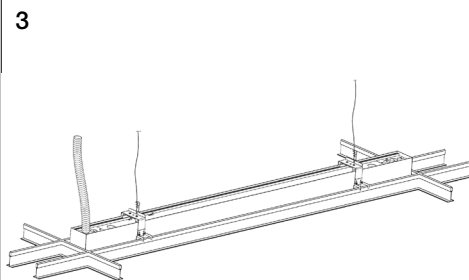











The installation is complete.

INSTALLATION

LMA-REC-TR - Trimless Recessed Installation

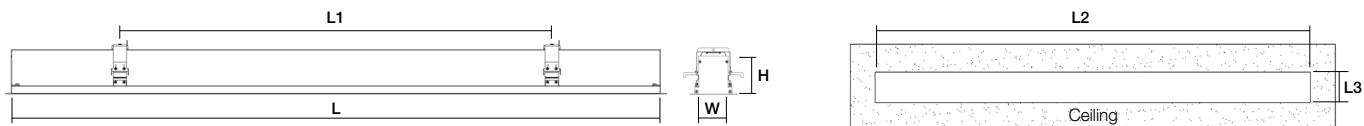


LMA-REC-TR						
Size	L	W	H	L1 Installation Spacing	L2 Dry Ceiling Slot Spacing	L3 Dry Ceiling Slot Spacing
2FT	23.82"	2.48"	3.15"	7.87"	24.40"	3.35"
4FT	47.44"			31.50"	48.03"	3.35"
6FT	71.06"			55.12"	71.65"	3.35"
8FT	94.67"			78.74"	95.28"	3.35"

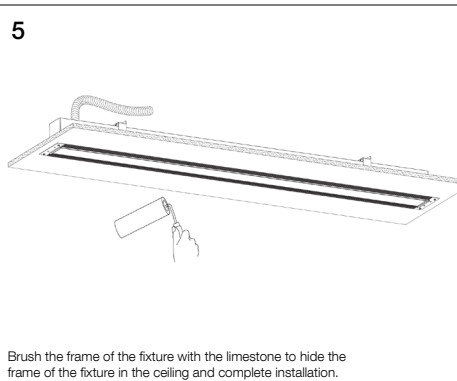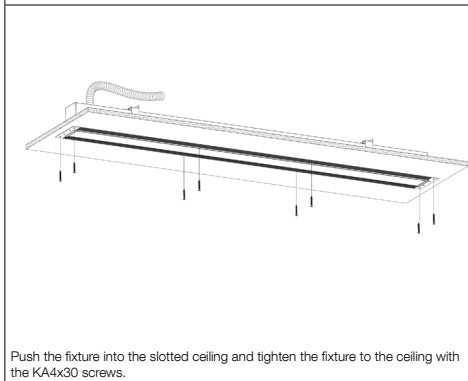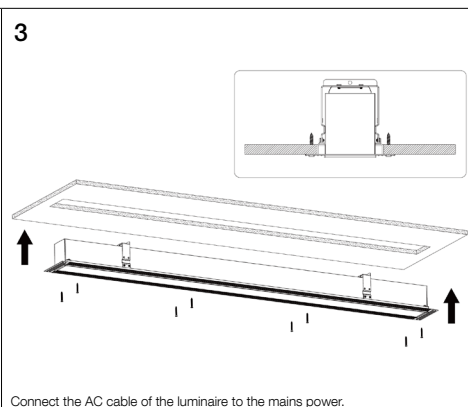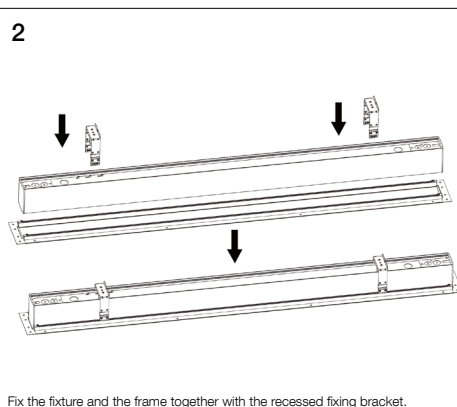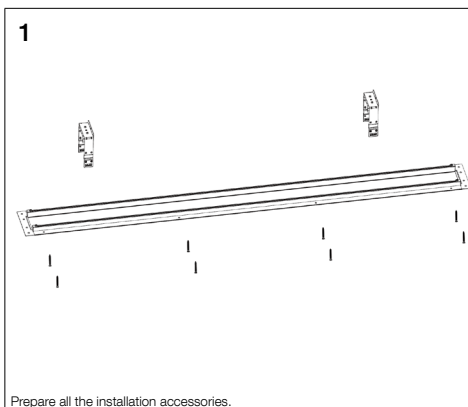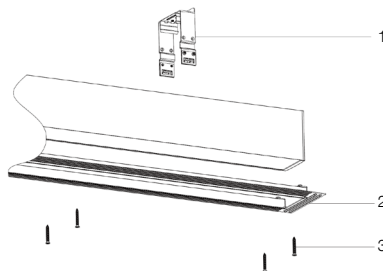



INSTALLATION

LMA-REC - Trimless Installation

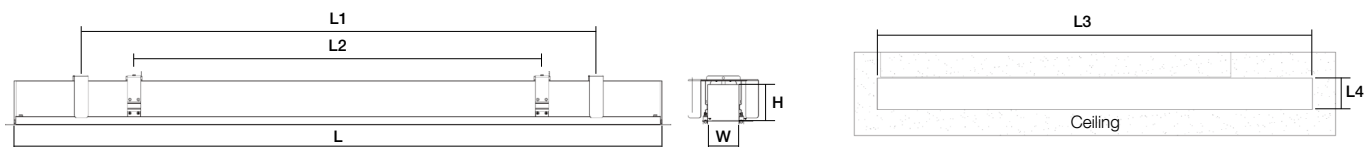


LMA-REC							
Size	L	W	H	L1 Installation Spacing	L2 Installation Spacing	L3 Dry Ceiling Slot Spacing	L4 Dry Ceiling Slot Spacing
2FT	23.82"	2.48"	3.15"	14.17"	7.87"	24.40"	3.38"
4FT	47.44"			37.80"	31.49"	48.03"	3.38"
6FT	71.06"			61.42"	55.11"	71.65"	3.38"
8FT	94.67"			85.04"	78.74"	95.28"	3.38"

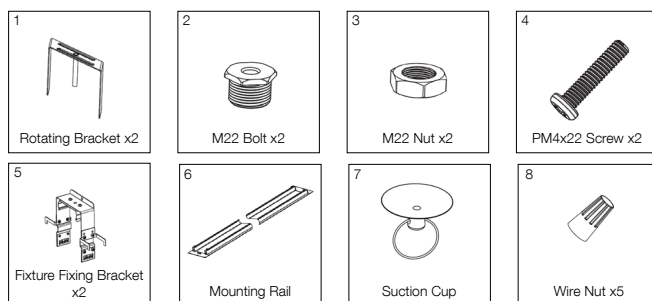

WIRING DIAGRAM


LINE	●	BLACK
NEUTRAL	●	WHITE
GREEN	●	GROUND
DIM (+)	●	VIOLET
DIM (-)	●	PINK

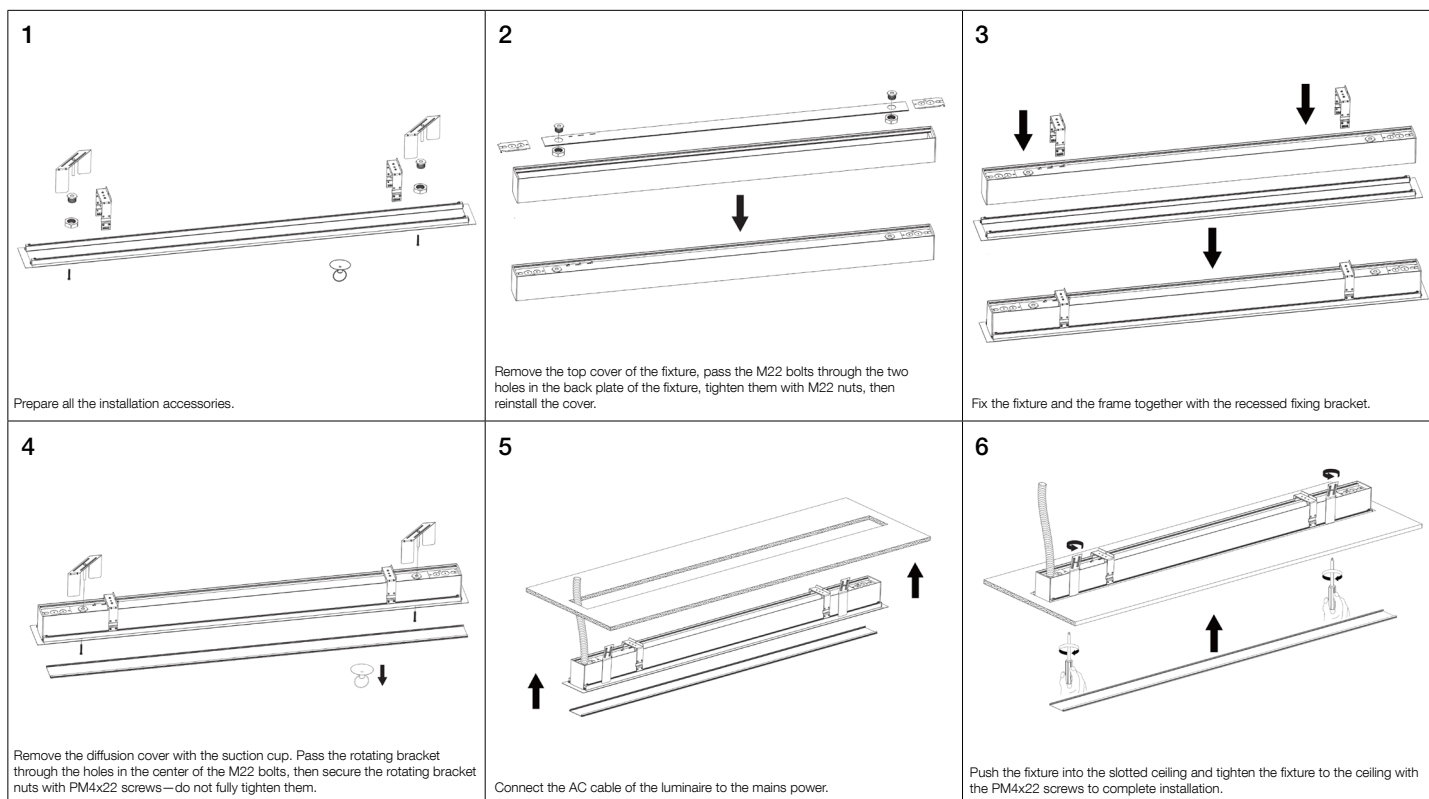


INSTALLATION

Indirect Lighting Module Installation


1. Knock out the knockoutholes and remove the wire covers.
2. Peel off the adhesive backing paper of the top-emitting module, then attach the module to the luminaire body and secure it with two screws.
3. Connect the wires. (For 2ft and 4ft luminaires: Plug in the terminal wires of UP LED1. For 8ft luminaires: Plug in the terminal wires of both UP LED1 and UP LED2.)
4. Tuck the wires into the luminaire and reinstall the wire covers.

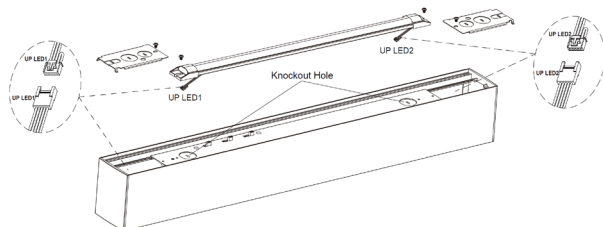

Note: For 8ft luminaires, ensure wires are connected at both ends to the luminaire terminals

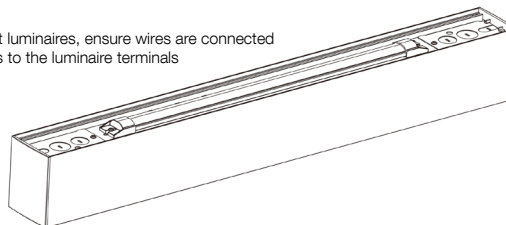


Joiner Installation




Joiner Bracket




"L" Joiner




"T" Joiner



"X" Joiner







"V" Joiner



"Y" Joiner

1. Remove the wire cover of the fixture with a screwdriver and take out the joiner bracket and connector pins from the accessory pack.
2. Insert the joiner bracket into the fixtures and insert the four connector pins into the holes of the fixture as shown in the diagram.
3. After connecting the docking terminal, lift the lever from the joiner bracket, bring the loop over to the installed hook, press down on the lever to lock the loop in place, and then reinstall the wire cover.
4. Tear off the adhesive backing of the light-shielding paper and stick it on the inner side of the luminaire body according to the illustration.

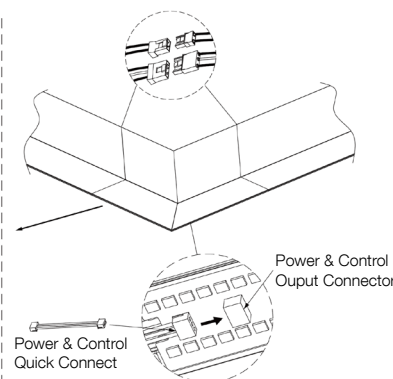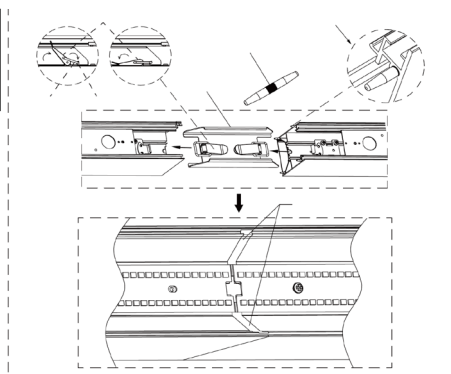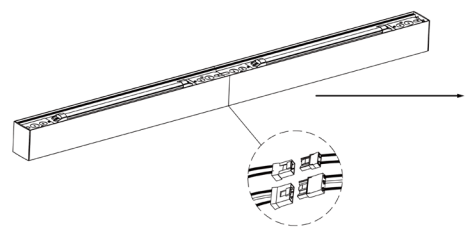


Power & Control Output Connector

Power & Control Quick Connect

Connect the terminals as above if with joiners.

Diffuser Accessories (Optional)

Optional continuous rolling lens up to 40FT is available.

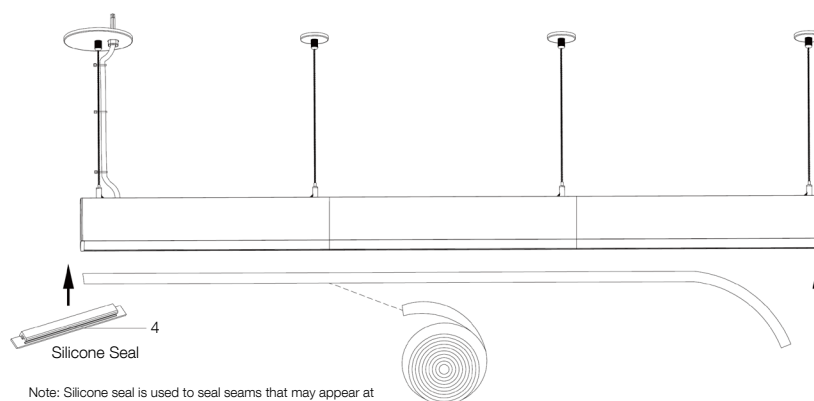

Note: Silicone seal is used to seal seams that may appear at both ends of the luminaires with multiple connections.