


Direct



Direct
Indirect

Product Features

LUX Series LX2 linear architectural luminaire housing from 2" wide aluminum extruded profile, offered in 2, 4, 5, 6, and 8-FT length profile, available with matte Black, White, Silver or custom RAL finish; steel cable suspension system for direct ceiling mounting, with power supply unit integral inside fixture, and power feed cable through the 5-inch junction box cover plate; entire luminaire homogeneously illuminated, frosted PMMA lens; emits even direct facing illumination characteristic for general illumination and soft indirect for maximum visual comfort; SAMSUNG LED with above 90CRI; available in 2700K, 3000K, 3500K, 4000K; 85% of luminous flux after 50,000 hours; ETL damp location listed; universal power supply with 0-10v dimming capability.



Technical Specifications

INPUT VOLTAGE	Universal Input AC120-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	2700, 3000K, 3500K, 4000K
COLOR RENDERING INDEX	90
DISTRIBUTION	Direct, Direct/Indirect
IP RATING	Damp Location
LIFE SPAN	>50,000 Hours
DIMMING	0-10v Dimming




DIMENSIONS

Cross Section

SERIES & SIZE	DIMENSION	Section	
LX2-L2	L24" x W2" x H3"	1	 <p>H</p> <p>W</p>
LX2-L4	L48" x W2" x H3"	1	
LX2-L5	L60" x W2" x H3"	1	
LX2-L6	L72" x W2" x H3"	1	
LX2-L8	L96" x W2" x H3"	1	
LX2-IL2	L24" x W2" x H3.5"	1	 <p>H</p> <p>W</p>
LX2-IL4	L48" x W2" x H3.5"	1	
LX2-IL5	L60" x W2" x H3.5"	1	
LX2-IL6	L72" x W2" x H3.5"	1	
LX2-IL8	L96" x W2" x H3.5"	1	

Custom Length Consult Factory

Quick Mount

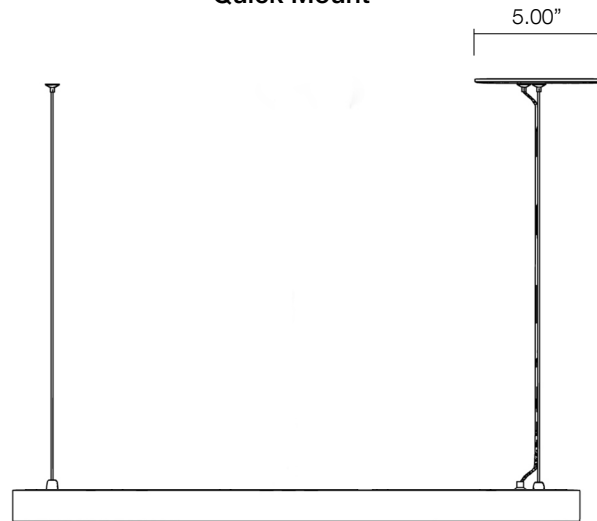

Surface Mount



LUX SERIES | LX2

COLOR CHART (CHOOSE ONE)

CC
RAL

Specify Color Code:
Specify RAL Color:



EMB SPEC

Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
LX2-EMB	90mins	100-347VAC	25-58VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Factory Install

