



Suspended - 36" Luminaire



Surface Mount - 24" Luminaire

Product Features

Glow Slim Series - Ultra low profile round shaped architectural luminaire housing from rolled aluminum profile, laser cut and seamlessly welded; available with matte Black, White, Silver or custom RAL finish; offered with steel cable suspension system through surface canopy; or optional surface mount; power supply unit to be installed in canopy or remote; frosted PMMA lens; emit soft and even direct illumination; SAMSUNG LED with above 90CRI color rendering; available in 2700K, 3000K, 3500K, 4000K; 85% of luminous flux after 50000 hours; cETLus Damp Location listed; universal power supply with 0-10v dimming capability.

Technical Specifications

INPUT VOLTAGE	Universal Input AC120-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K
COLOR RENDERING INDEX	90
DISTRIBUTION	Direct
IP RATING	Damp Location
LIFE SPAN	>50,000 Hours
DIMMING	0-10v Dimming





Order Code Example: **GL-S** **- R2** **- 35** **- CM** **- MW** **- WH** **- OPTIONS**

A B C D E F G

GL-S Glow Slim Series Round-Shaped Luminaire

CODE	DISTRIBUTION	POWER & LUMEN		LPW	DIMENSION	SUSPENSION	DRIVER
R1	Direct	15W	1,200lm	80	D12" x H0.9"	3	1
R1.3	Direct	20W	1,600lm	80	D16" x H0.9"	3	1
R1.5	Direct	30W	2,400lm	80	D19" x H0.9"	3	1
R2	Direct	40W	3,200lm	80	D24" x H0.9"	3	1
R3	Direct	90W	7,200lm	80	D36" x H0.9"	3	2
R4	Direct	120W	9600lm	80	D48" x H0.9	4	3

27	2700K	35	3500K
30	3000K	40	4000K

CM	5FT Steel Cable, 10-Inch Surface Mount Canopy, Integral Power
CM2	5FT Steel Cable, 11-Inch/14-Inch Surface Mount Canopy w/Center-Ring, Integral Driver
SM	Surface Mount, Integral Power

MB	Black	MS	Silver
MW	White	CC*	Customized Color

*see Customized Color Chart on pg. 4

BK	5FT Black Power Cord
WH	5FT White Power Cord


blank	120/277V 0-10V Dimming
FAD	Customized Output (Consult Factory)
EMB-H08170*	90-Minute Self-Diagnostic Emergency Battery 8W 100-347VAC Input 170VDC Output (For R1/R1.3-CM Mount Only)

*View EMB spec on page 4.

GLOW SLIM SERIES | GL-S


DIMENSIONS

SERIES & SIZE	DIMENSION
GL-S-R1	D12" x H0.9"
GL-S-R1.3	D16" x H0.9"
GL-S-R1.5	D19" x H0.9"
GL-S-R2	D24" x H0.9"
GL-S-R3	D36" x H0.9"
GL-S-R4	D48" x H0.9"

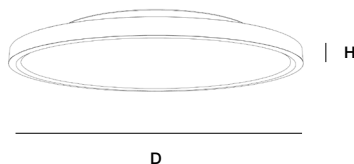


CM - Canopy Mount

FIXTURE	CANOPY SIZE
GL-S-R1	10"
GL-S-R1.3	10"
GL-S-R1.5	10"
GL-S-R2	10"
GL-S-R3	10"
GL-S-R4	10"

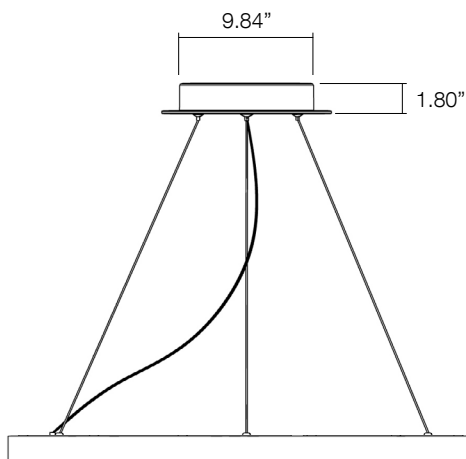


CM2 - Canopy Mount w/Center Ring

FIXTURE	CANOPY SIZE
GL-S-R1	11"
GL-S-R1.3	11"
GL-S-R1.5	11"
GL-S-R2	11"
GL-S-R3	11"
GL-S-R4	14"

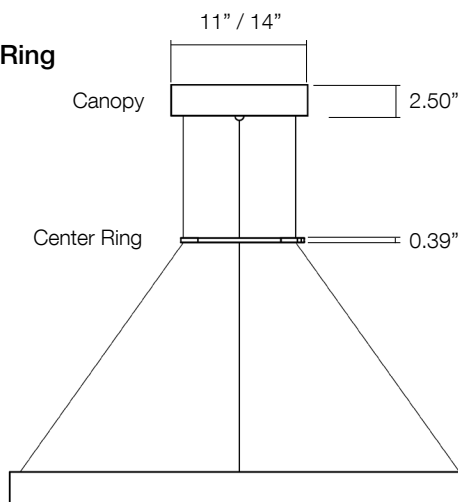


ø11.02" (ø280mm)




11" Surface Mount Canopy

ø9.45" (ø240mm)




Center Ring w/Single Wire Hole

ø13.78" (ø350mm)



14" Surface Mount Canopy

ø12.20" (ø310mm)




Center Ring w/Double Wire Hole

GLOW SLIM SERIES | GL-S

EMB SPEC

Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-H08170	90mins	100-347VAC	170VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Field Install

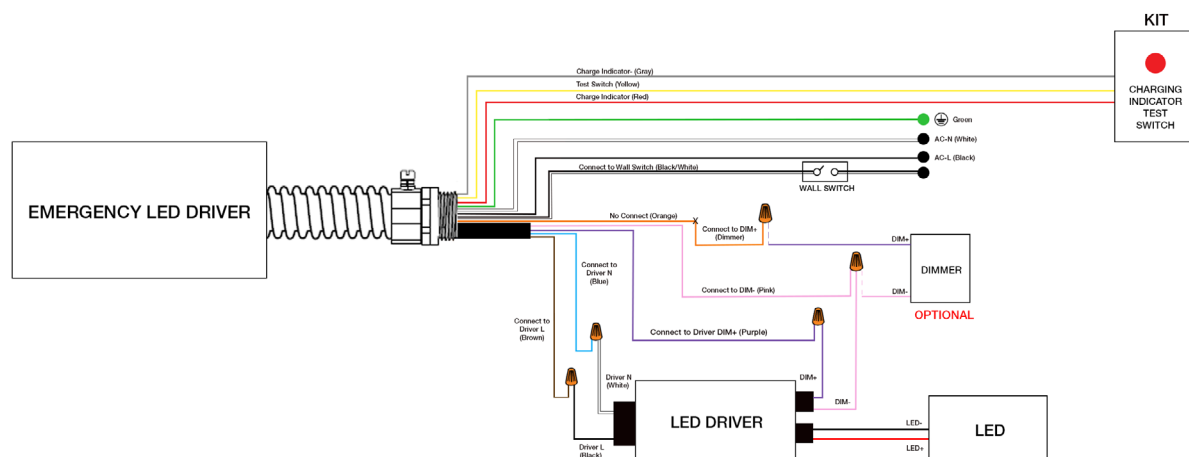

COLOR CHART (CHOOSE ONE)

CC
RAL

Specify Color Code:
Specify RAL Color:

						
GR - Green	BL - Blue	PP - Purple	PK - Pink	RD - Red	OG - Orange	YW - Yellow
						
MBS - Matte Brass	GB - Gloss Black	MW - Matte White	GW - Gloss White	OB - Oil Rubbed Bronze	GZ - Gloss Bronze	MS - Matte Silver
						
MBS - Matte Brass	GBS - Gloss Brass	CNH285 - American Walnut	QL0928 - European Cherry	QL0503 - Light Oak	QL0411 - Maple	QL0908 - Palisander Santos