



Direct

Product Features

Revolve Series 83 - an IP65 Wet Location ring shaped versatile architectural luminaire housing from rolled aluminum extruded profile, seamlessly welded; available with standard matte Black, White, Silver or custom RAL finish; available with steel cable suspension system through surface or direct ceiling mount; power supply unit to be installed in canopy or remote; entire luminaire homogeneously illuminated, single ring shaped frosted PMMA lens; soft direct illumination characteristic for general illumination and maximum visual comfort; SAMSUNG LED with above 90CRI; available in 2700K, 3000K, 3500K, 4000K; 85% of luminous flux after 50000 hours; ETL wet location listed; universal power supply with 0-10v dimming capability.

Technical Specifications

INPUT VOLTAGE	Universal Input AC120-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K
COLOR RENDERING INDEX	90
DISTRIBUTION	Direct
IP RATING	IP65 Wet Location
LIFE SPAN	50,000 Hours
DIMMING	0-10v Dimming





Order Code Example: **RV-83** - **D3** - **40** - **QM** - **MW** - **WH** - **OPTIONS**

A B C D E F G

RV-83 Revolve Series IP65 Wet Location Ring Shaped Luminaire

CODE	DISTRIBUTION	POWER & LUMEN		LPW	WEIGHT	DIMENSION	SUSPENSION	DRIVER	SECTION
D2	Direct	32W	2,240lm	70	7lbs	D24" x W1.3" x H1.5"	3	1	1
D3	Direct	50W	3,500lm	70	11lbs	D36" x W1.3" x H1.5"	3	1	1
D4	Direct	65W	4,550lm	70	14lbs	D47" x W1.3" x H1.5"	4	2	1
D5	Direct	80W	5,600lm	70	17lbs	D59" x W1.3" x H1.5"	4	2	1

27	2700K
30	3000K
35	3500K
40	4000K

QM	5FT Steel Cable Direct Mount, 10-Inch/14-Inch Surface Mount Canopy, Integral Driver	(Canopy size varies by fixture output)
SM	Surface Mount Kit, Remote Driver Enclosure	
	*See compatible list on Pg 3	

MB	Black
MW	White
MS	Silver
CC*	Customized Color

*see Customized Color Chart on pg 4



BK	Standard 5FT Black Power Cord / Specify Length ____ FT (Suspension cable length will match)
WH	Standard 5FT White Power Cord / Specify Length ____ FT (Suspension cable length will match)

blank	120/277V 0-10V Dimming
FAD	Customized Output (Consult Factory)
BAA	Assembled in America, Compliant with BAA (COTS)

REVOLVE SERIES | RV-83

DIMENSIONS

Direct



FIXTURE MODEL

RV-83-D2	D24" x W1.3" x H1.5"
RV-83-D3	D36" x W1.3" x H1.5"
RV-83-D4	D47" x W1.3" x H1.5"
RV-83-D5	D59" x W1.3" x H1.5"

DIMENSION

D24" x W1.3" x H1.5"
D36" x W1.3" x H1.5"
D47" x W1.3" x H1.5"
D59" x W1.3" x H1.5"

MOUNTING CANOPY OPTION


QM, SM
QM, SM
QM, SM
QM, SM

D = Outer Diameter

MOUNTING OPTIONS

QM - Quick Mount w/Surface Mount Canopy

FIXTURE	CANOPY SIZE
RV-83-D2	10"
RV-83-D3	10"
RV-83-D4	10"
RV-83-D5	14"

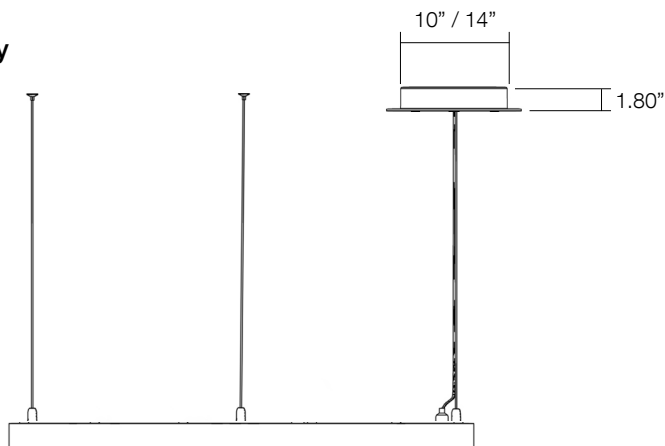

REVOLVE SERIES | RV-83

COLOR CHART (CHOOSE ONE)

CC
RAL

Specify Color Code:
Specify RAL Color:



GR - Green



BL - Blue



PP - Purple



PK - Pink



RD - Red



OG - Orange



YW - Yellow



MB - Matte Black



GB - Gloss Black



MW - Matte White



GW - Gloss White



OB - Oil Rubbed Bronze



GZ - Gloss Bronze



MS - Matte Silver



MBS - Matte Brass



GBS - Gloss Brass



CNH285 - American Walnut



QL0928 - European Cherry



QL0503 - Light Oak



QL0411 - Maple



QL0908 - Palisander Santos