



Product Features

Crafted with precision and attention to detail, combining a suite of customizable features with our high performing LED modules, the Cylinder series provides brilliant illumination and beautiful design versatile enough for whatever your project's needs. Powerful Bridgelux light engine available with 2700K, 3000K, 3500K and 4000K CCT, interchangeable baffles available in White, Black, Copper and Chrome finish, 85% of luminous flux after 50,000 hours; cULus listed for damp location.

Technical Specifications

INPUT VOLTAGE	AC120-277V
FREQUENCY	50/60hz
LUMEN	1140 ~ 5220LM
WATTAGE	12 ~ 58W
LPW	100lm/W
COLOR TEMPERATURE	2700K / 3000K / 3500K / 4000K
COLOR RENDERING INDEX	>80 / >90
DISTRIBUTION	15° / 24° / 36° / 60° / 80°
IP RATING	Damp Location
LIFE SPAN	>50,000 Hours
DIMMING	0-10V-10% / 1% / Triac



CYLINDER SERIES | CY

SUBMITTAL WORKSHEET

Order Code Example: Series + Light Engine+ CCT + Distribution + Baffle + Housing Finish + Driver

CY - 4 - 830 - 24 - AGCP - WH - blank

A B C D E F G

A SERIES

CY Cylinder Series

B LIGHT ENGINE (CHOOSE ONE)

CODE		DIMENSION	POWER	LUMEN	LPW
4	QS	ø 3.90" x 4.90"	Field Selectable 12W / 18W / 25W	1,140 / 1,710 / 2,350	95
6	QS	ø 5.80" x 5.90"	Field Selectable 20W / 30W / 40W	2,100 / 3,150 / 4,200	105
8	QS	ø 7.80" x 7.70"	Field Selectable 29W / 44W / 58W	2,610 / 3,960 / 5,220	90

C CCT (CHOOSE ONE)

CODE		CCT
827	QS	80CRI, 2700K
830	QS	80CRI, 3000K
835	QS	80CRI, 3500K
840	QS	80CRI, 4000K
927	QS	90CRI, 2700K
930	QS	90CRI, 3000K
935	QS	90CRI, 3500K
940	QS	90CRI, 4000K

D DISTRIBUTION (CHOOSE ONE)

CODE		DISTRIBUTION	CODE		DISTRIBUTION
15	QS	Narrow - 15°	36	QS	Wide - 36°
24	QS	Medium - 24°	60	QS	Flood - 60°

E BAFFLE* (CHOOSE ONE) *SPEC ON PG 4

AGWH	QS	Satin White	AGCP	QS	Satin Copper
AGBK	QS	Satin Black	AGCM	QS	Polished Chrome

F HOUSING FINISH (CHOOSE ONE)

BK	QS	Satin Black Finish	CC*	Customized Color Finish
WH	QS	Satin White Finish		

*see Customized Color Chart on pg 3

G DRIVER (CHOOSE ONE)

blank	QS	120-277V Input, 0-10V 10% Dimming Driver
1	QS	120-277V Input, 0-10V 1% Dimming Driver
T	QS	120-277V Input, TRIAC Dimming Driver



CYLINDER SERIES | CY

SUBMITTAL WORKSHEET

Order Code Example: Mounting

QM-REC - blank

H I

Order Code Example: EMB

EMB-H18170

J

H MOUNTING (CHOOSE ONE) *SPEC ON PG 5--6

QM-REC	QS	Suspension Kit for Recessed J-box (J-box above finished ceiling) Specify Cable length 2FT 4FT 8FT
QM-SM	QS	Suspension Kit for Surface J-box (J-box below finished ceiling) Specify Cable length 2FT 4FT 8FT
STMS-REC	QS	Slope Ceiling Stem Mount Kit for Recessed J-box (J-box above finished ceiling) Specify Stem length 2FT 4FT 8FT
STMS-SM	QS	Slope Ceiling Stem Mount Kit for Surface J-box (J-box below finished ceiling) Specify Stem length 2FT 4FT 8FT
SM-REC	QS	Surface Mount Kit for Recessed J-box (J-box above finished ceiling)
SM-SM	QS	Surface Mount Kit for Surface J-box (J-box below finished ceiling)

I MOUNTING FINISH (CHOOSE ONE)

blank		Matching Fixture Housing Finish	WH	QS	Satin White Finish
BK	QS	Satin Black Finish			

J OPTIONS


BAA	Assembled in America, Compliant with BAA (COTS)
EMB-H08170	90-Minute Self-Diagnostic Emergency Battery 8W 100-347VAC Input 170VDC Output
EMB-H18170	90 Minute Self-Diagnostic Emergency Battery 18W 100-347VAC Input 170VDC Output

*see page 8 for emb spec

CYLINDER SERIES | CY

DIMENSIONS

CODE	DIMENSION		
	H1	H2	W
CY-4 (Engine w/Baffle)	4.90"	2.60"	ø 3.90"
CY-6 (Engine w/Baffle)	5.90"	3.05"	ø 5.80"
CY-8 (Engine w/Baffle)	7.70"	3.80"	ø 7.80"



CY Light Engine Summary

LED Chip: Bridgelux

Power: CY-4: 12/18/25W | CY-6: 20/30/40W | CY-8: 29/44/58W

Quality: >80CRI | >90 CRI, 3-step SDCM

CCT: 2700K | 3000K | 3500K | 4000K

Input: 120~277V, 50/60Hz

Dimming: 0-10V 10% Dimming | 0-10V 1% Dimming | TRIAC Dimming

Dimmer: Tested with Lutron Diva-DVTV, Leviton IP-710-DL

Power Factor: Greater than 0.9

Ambient Operating Temperature: -20°C to 40°C

Lifetime: 50,000 hours at 70% lumen maintenance

Listing: cULus Damp Location

COLOR CHART (CHOOSE ONE)

CC
RAL

Specify Color Code:

Specify RAL Color:



GR - Green



BL - Blue



PP - Purple



PK - Pink



RD - Red



OG - Orange



YW - Yellow



BK - Satin Black



GB - Gloss Black



WH - Satin White



GW - Gloss White



OB - Oil Rubbed Bronze



GZ - Gloss Bronze



MS - Matte Silver



MBS - Matte Brass




GBS - Gloss Brass

CYLINDER SERIES | CY

DIMENSIONS - BAFFLES

AGXX




Housing

	H	W1	W2
CY-4	2.30"	ø2.03"	ø3.90"
CY-6	2.85"	ø3.10"	ø5.80"
CY-8	3.90"	ø4.09"	ø7.80"



AGWH
Satin White



AGCP
Satin Copper



AGBK
Satin Black



AGCM
Polished Chrome

CYLINDER SERIES | CY

DIMENSIONS - QM MOUNT


QM-REC - Suspension Kit for Recessed J-box (J-box above finished ceiling)



CY-4




CY-6 / CY-8

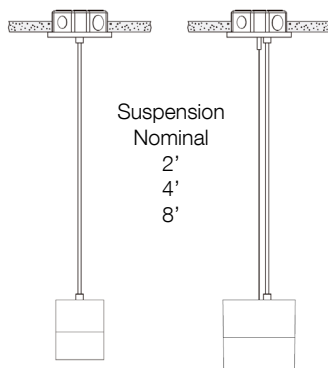


CY-4
Suspended via
Power Cord

CY-6 / CY-8
Suspended via
Aircraft Cable



CY-4
4" Canopy
with Power Cable
(Covers 40 Box)




CY-6 / CY-8
4" Canopy
with AC Cable and
Power Cable
(Covers 40 Box)

QM-SM - Suspension Kit for Surface J-box (J-box below finished ceiling)




CY-4

CY-6 / CY-8

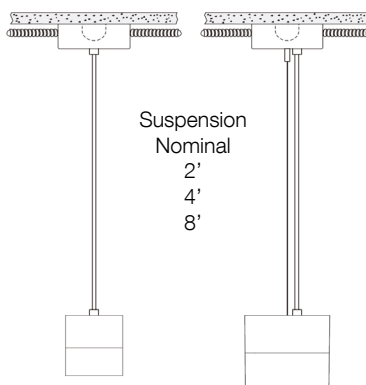

CY-4
Suspended via
Power Cord


CY-6 / CY-8
Suspended via
Aircraft Cable

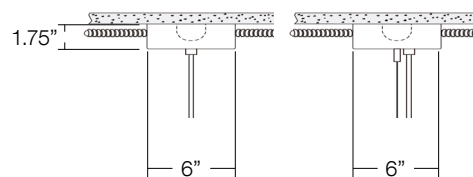

CY-4
6" Surface Canopy
for Power Cable
(Covers 40 Box)

CY-6 / CY-8
6" Surface Canopy
with AC Cable and
Power Cable
(Covers 40 Box)

Surface Conduit Layout

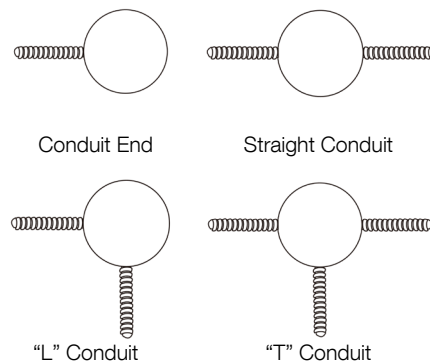


CYLINDER SERIES | CY

DIMENSIONS - STEM MOUNT

STMS-REC - Slope Ceiling Stem Kit for Recessed J-box (J-box above finished ceiling)




CY-4 / CY-6 / CY-8

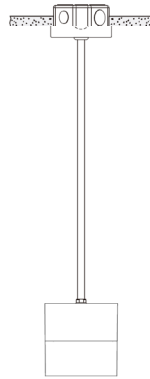

CY-4 / CY-6 / CY-8
Suspended via Stem

Stem
Nominal
2'
4'
8'

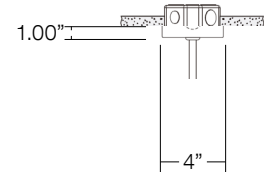


CY-4 / CY-6 / CY-8
4" Canopy
for Stem Mount
(Covers 40 Box)

STMS-SM - Slope Ceiling Stem Kit for Surface J-box (J-box below finished ceiling)




CY-4 / CY-6 / CY-8

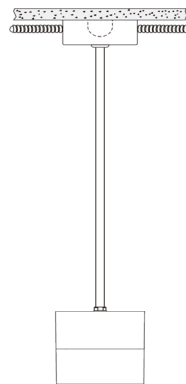


CY-4 / CY-6 / CY-8
Suspended via Stem

Stem
Nominal
2'
4'
8'



CY-6 / CY-8
6" Surface Canopy
for Stem Mount
(Covers 40 Box)

Surface Conduit Layout

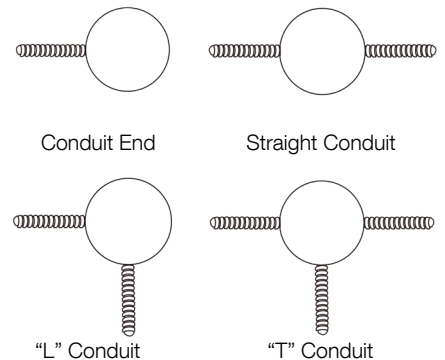


CYLINDER SERIES | CY

DIMENSIONS - SURFACE MOUNT


SM-REC - Surface Mount Kit for Recessed J-box (J-box above finished ceiling)



CY-4 / CY-6 / CY-8



CY-4 / CY-6 / CY-8
Surface Mount



CY-4 / CY-6 / CY-8
Surface Mount
(Covers 40 Box)

	W
CY-4	ø 3.90"
CY-6	ø 5.80"
CY-8	ø 7.80"


SM-SM - Surface Mount Kit for Surface J-box (J-box below finished ceiling)




CY-4

CY-6

CY-8



CY-4 / CY-6 / CY-8
Surface Mount




CY-6 / CY-8
6" Surface Canopy
(Covers 40 Box)

Surface Conduit Layout



Conduit End

Straight Conduit

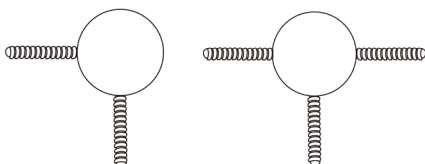

"L" Conduit


"T" Conduit

	W1	W2
CY-4	ø 6.00"	ø 3.90"
CY-6	ø 6.00"	ø 5.80"
CY-8	ø 6.00"	ø 7.80"

CYLINDER SERIES | CY

PERFORMANCE


IES: CY-4 @ 25W 90CRI 3000K 36°



Zone	Lumen	Luminaire%
0-30	2069	84.70
0-40	2308	94.50
0-60	2399	98.30
0-90	2435	99.70
0-180	2442	100

Lumen: 2442
 Input Watts: 25.2 W
 Efficacy: 97 LPW


IES: CY-6 @ 40W 90CRI 3000K 36°



Zone	Lumen	Luminaire%
0-30	3942	90.60
0-40	4238	97.4
0-60	4330	99.50
0-90	4340	99.70
0-180	4353	100

Lumen: 4353
 Input Watts: 39.4 W
 Efficacy: 110 LPW

IES: CY-8 @ 58W 90CRI 3000K 36°




Zone	Lumen	Luminaire%
0-30	5380	93.60
0-40	5608	97.60
0-60	5699	99.20
0-90	5730	99.70
0-180	5746	100


Lumen: 5746
 Input Watts: 57.5 W
 Efficacy: 100 LPW

EMB SPEC

Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-H08170	90mins	100-347VAC	170VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Field Install
EMB-H18170	90mins	100-347VAC	170VDC	18W	0°C ~ 50°C 32°F ~ 122°F	Field Install

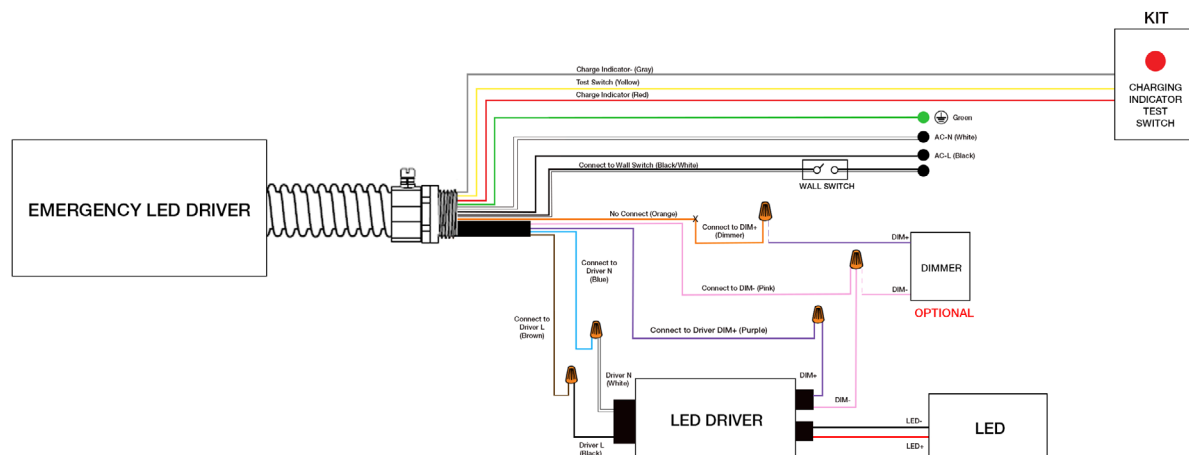


INSTALLATION

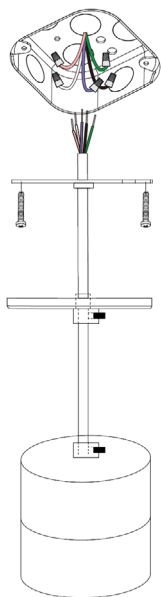


QM-REC

For CY-4
Power Cable Suspension Kit
for Recessed J-box

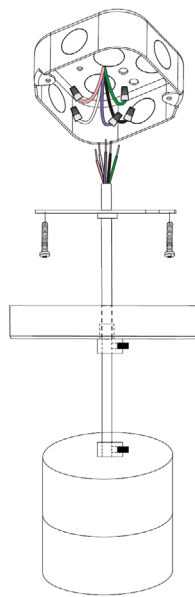


QM-SM

For CY-4
Power Cable Suspension Kit
for Surface J-box

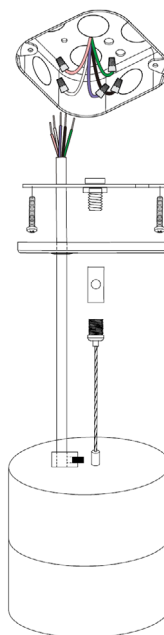


QM-REC

For CY-6 / CY-8
Aircraft Cable Suspension
for Recessed J-box

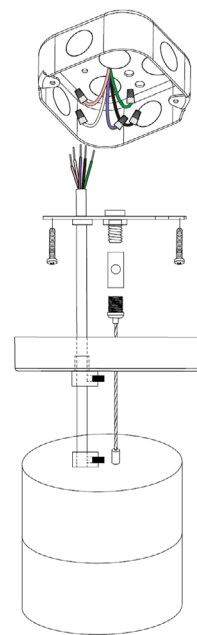


QM-SM

For CY-6 / CY-8
Aircraft Cable Suspension
for Surface J-box

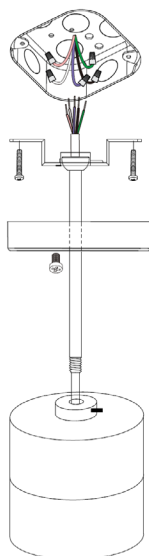


STM-REC

For CY-4 / CY-6 / CY-8
Stem Mount Kit
for Recessed J-box

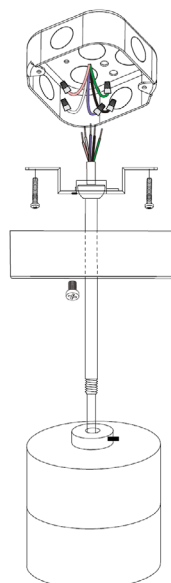


STM-SM

For CY-4 / CY-6 / CY-8
Stem Mount Kit
for Surface J-box

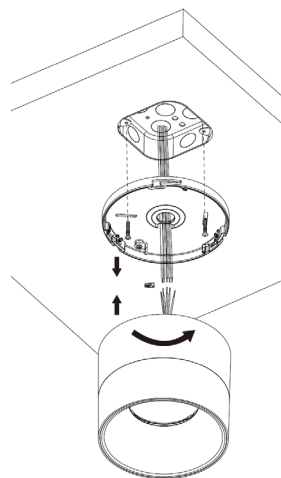

SM-REC

For CY-4 / CY-6 / CY-8
Surface Mount Kit
for Recessed J-box

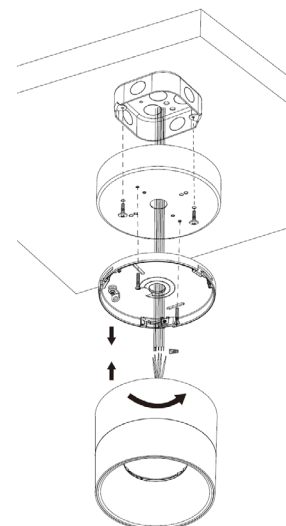

SM-SM

For CY-4 / CY-6 / CY-8
Surface Mount Kit
for Surface J-box