



Suspended - 36" Luminaire



Surface Mount - 24" Luminaire

**Product Features**

Glow Slim Series - Ultra low profile round shaped architectural luminaire housing from rolled aluminum profile, laser cut and seamlessly welded; available with matte Black, White, Silver or custom RAL finish; offered with steel cable suspension system through surface canopy; or optional surface mount; power supply unit to be installed in canopy or remote; frosted PMMA lens; emit soft and even direct illumination; SAMSUNG LED with above 90CRI color rendering; available in 2700K, 3000K, 3500K, 4000K; 85% of luminous flux after 50000 hours; cETLus Damp Location listed; universal power supply with 0-10v dimming capability.

**Technical Specifications**

INPUT VOLTAGE	Universal Input AC120-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K
COLOR RENDERING INDEX	90
DISTRIBUTION	Direct
IP RATING	Damp Location
LIFE SPAN	>50,000 Hours
DIMMING	0-10v Dimming







## GLOW SLIM SERIES | GL-S

### DIMENSIONS


SERIES & SIZE	DIMENSION
GL-S-R1	D12" x H0.9"
GL-S-R1.3	D16" x H0.9"
GL-S-R1.5	D19" x H0.9"
GL-S-R2	D24" x H0.9"
GL-S-R3	D36" x H0.9"
GL-S-R4	D48" x H0.9"

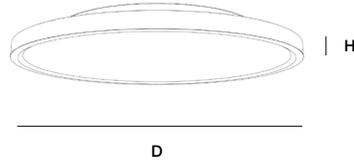

**CM - Canopy Mount**

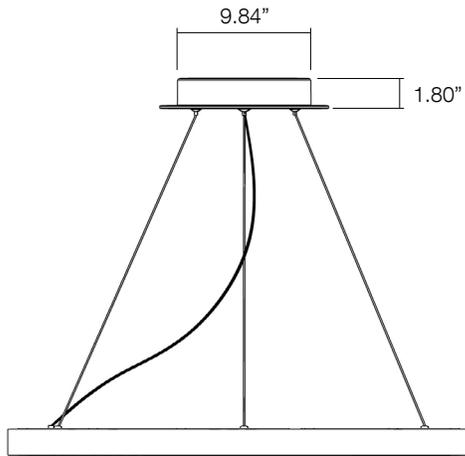

**CM2 - Canopy Mount w/ Center Ring**

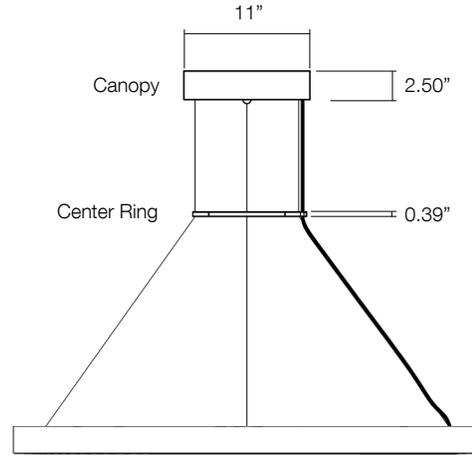

### COLOR CHART (CHOOSE ONE)

CC  
RAL

Specify Color Code:  
Specify RAL Color:

