



Inner



Outer

Product Features

ALLURE Revolve Series 84 - Ring shaped architectural luminaire housing from rolled aluminum extruded profile, seamlessly welded; available with matte Black, White, Silver or custom RAL finish; offered with steel cable suspension system through surface canopy or direct ceiling mount, entire luminaire homogeneously illuminated, ring shaped frosted PMMA lens; available with inner or outer facing emission; SAMSUNG LED with above 90CRI; available in 2700K, 3000K, 3500K, 4000K, RGBW and Tunable White; 85% of luminous flux after 50,000 hours; ETL damp location listed; universal power supply with 0-10V dimmable or optional ELV dimmable capability.

Technical Specifications

INPUT VOLTAGE	Universal Input AC110-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K, RGBW, Tunable White
COLOR RENDERING INDEX	90
DISTRIBUTION	Inner, Outer
IP RATING	Damp Location
LIFE SPAN	>50,000 Hours
DIMMING	0-10v Dimming, Electronic Low Voltage Dimming



REVOLVE SERIES | RV-84

SUBMITTAL WORKSHEET

Order Code Example: **RV-84** **- IN3** **- 40** **- CM** **- MW** **- WH** **- OPTIONS**

A B C D E F G

A SERIES (CHOOSE ONE)

RV-84 Revolve Series Suspended Ring Shaped Side Emitting Luminaire

B SIZE & OUTPUT (CHOOSE ONE)

CODE	DISTRIBUTION	POWER & LUMEN		LPW	DIMENSION	SUSPENSION	DRIVER	SECTION
IN2	Inner	32W	2,348lm	74	D24" x W1.4" x H1.3"	3	1	1
IN3	Inner	40W	2,935lm	74	D36" x W1.4" x H1.3"	3	1	1
IN4	Inner	70W	5,136lm	74	D48" x W1.4" x H1.3"	4	2	1
IN5	Inner	80W	5,870lm	74	D60" x W1.4" x H1.3"	4	2	1
IN6.5	Inner	100W	7,000lm	70	D79" x W1.4" x H1.3"	6	2	2
IN8	Inner	120W	8,400lm	70	D98" x W1.4" x H1.3"	8	4	4
IN10	Inner	160W	11,200lm	70	D118" x W1.4" x H1.3"	10	5	5
OU2	Outer	32W	2,348lm	74	D24" x W1.4" x H1.3"	3	1	1
OU3	Outer	40W	2,935lm	74	D36" x W1.4" x H1.3"	3	1	1
OU4	Outer	70W	5,136lm	74	D48" x W1.4" x H1.3"	4	2	1
OU5	Outer	80W	5,870lm	74	D60" x W1.4" x H1.3"	4	2	1
OU6.5	Outer	100W	7,000lm	70	D79" x W1.4" x H1.3"	6	2	2
OU8	Outer	120W	8,400lm	70	D98" x W1.4" x H1.3"	8	4	4
OU10	Outer	160W	11,200lm	70	D118" x W1.4" x H1.3"	10	5	5

C CCT (CHOOSE ONE)

27	2700K	40	4000K
30	3000K	RGBW*	Red, Green, Blue, White - Mix LED
35	3500K	TW*	Tunable White *Custom-build please consult factory

D MOUNTING

CM	5FT Steel Cable, 10-Inch Surface Mount Canopy, Integral Driver
QM	5FT Steel Cable w/Ceiling Mount, Surface Mount Canopy, Integral Driver

E FINISH

MB	Black	MS	Silver
MW	White	CC*	Customized Color *see Customized Color Chart on pg 3

F POWER CORD (CHOOSE ONE)


BK	5FT Black Power Cord
WH	5FT White Power Cord

G OPTIONS


blank	120/277V 0-10V Dimming
ED	120/277V Electronic Low Voltage Dimming
CMP	Compatible with QM option, 10-Inch Surface Mount Canopy, Integral Power Included (120/277V 0-10V DIMMING)
FAD	Customized Output (Consult Factory) Specify Lumen

DIMENSIONS

INNER


	CODE	DIMENSION
	IN2	D24" x W1.4" x H1.3"
	IN3	D36" x W1.4" x H1.3"
	IN4	D48" x W1.4" x H1.3"
	IN5	D60" x W1.4" x H1.3"
	IN6.5	D79" x W1.4" x H1.3"
	IN8	D98" x W1.4" x H1.3"
	IN10	D118" x W1.4" x H1.3"

OUTER

	CODE	DIMENSION
	OU2	D24" x W1.4" x H1.3"
	OU3	D36" x W1.4" x H1.3"
	OU4	D48" x W1.4" x H1.3"
	OU5	D60" x W1.4" x H1.3"
	OU6.5	D79" x W1.4" x H1.3"
	OU8	D98" x W1.4" x H1.3"
	OU10	D118" x W1.4" x H1.3"


Canopy Mount

9.84" for up to IN4 / OU4 size
14.00" for all other

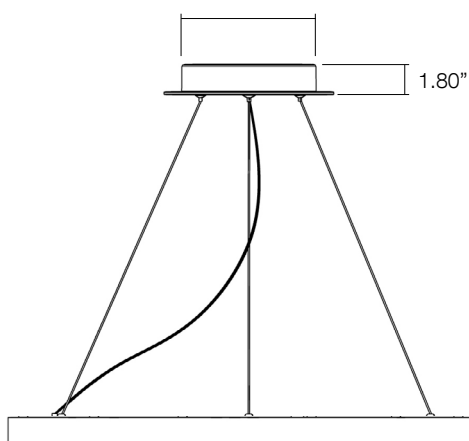

Quick Mount

9.84" for up to IN4 / OU4 size
14.00" for all other

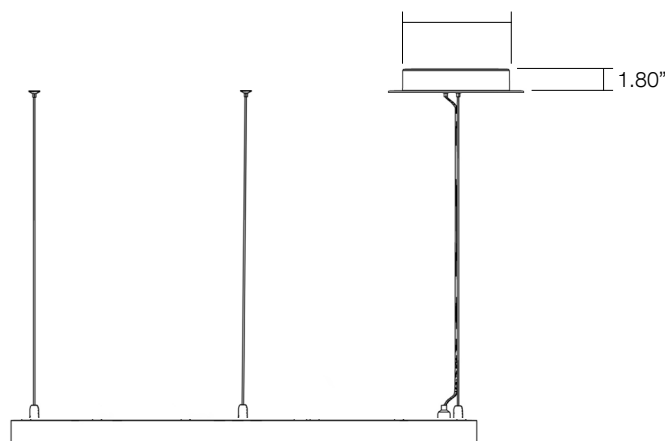

COLOR CHART (CHOOSE ONE)

CC
RAL

Specify Color Code:
Specify RAL Color:

						
GR - Green	BL - Blue	PP - Purple	PK - Pink	RD - Red	OG - Orange	YW - Yellow
						
MB - Matte Black	GB - Gloss Black	MW - Matte White	GW - Gloss White	OB - Oil Rubbed Bronze	GZ - Gloss Bronze	MS - Matte Silver
						
MBS - Matte Brass	GBS - Gloss Brass	CNH285 - American Walnut	QL0928 - European Cherry	QL0503 - Light Oak	QL0411 - Maple	QL0908 - Palisander Santos