




LX2.3 - Direct / Indirect Linear



- Recessed / Surface / Suspended / Wall Version
- 80CRI
- Available in 2FT / 3FT / 4FT / 8FT
- Field Selectable Output 10W ~ 80W
- Field Selectable CCT 3000K / 3500K / 4000K
- Distribution Direct / Indirect Ratio Field Selectable
- Optional "L" / "T" / "X" 90°, "Y" 120° NonLit Corner
- Optional 42FT Continuous Rolling Lens
- 0-10V Dimming
- Damp Location Certified

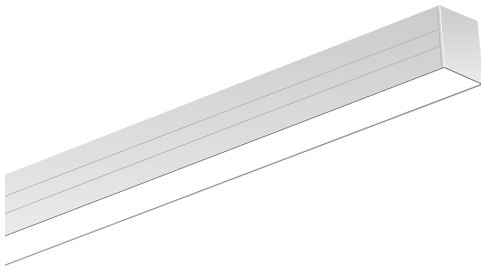