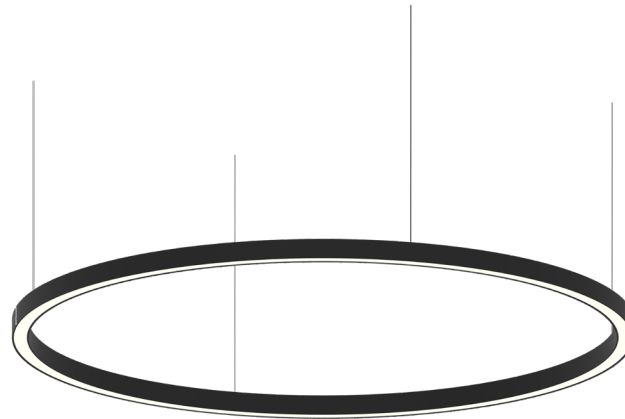




Direct

Product Features

Revolve Series 86 - Ring shaped versatile architectural luminaire housing from rolled aluminum extruded profile, seamlessly welded; available with standard matte Black, White, Silver or custom RAL finish; available with steel cable suspension system through surface canopy or direct ceiling mount; power supply unit to be installed in canopy or remote; entire luminaire homogeneously illuminated, single ring shaped frosted PMMA lens; soft direct / indirect illumination characteristic for general illumination and maximum visual comfort; SAMSUNG LED with above 90CRI; available in 2700K, 3000K, 3500K, and 4000K; 85% of luminous flux after 50000 hours; ETL damp location listed; universal power supply with 0-10v dimming capability.

Technical Specifications

INPUT VOLTAGE	Universal Input AC120-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K
COLOR RENDERING INDEX	90
DISTRIBUTION	Direct
IP RATING	Damp Location
LIFE SPAN	50,000 Hours
DIMMING	0-10V Dimming



REVOLVE SERIES | RV-86

SUBMITTAL WORKSHEET

Order Code Example: **RV-86** **- D3** **- 40** **- blank** **- MW** **- OPTIONS**

A B C D E F

A SERIES (CHOOSE ONE)

RV-86 Revolve Series - Cordless Power Over Suspension Ring Shaped Luminaire

B SIZE & OUTPUT (CHOOSE ONE)

CODE	DISTRIBUTION	POWER & LUMEN		LPW	WEIGHT	DIMENSION	SUSPENSION	DRIVER	SECTION
D2	Direct	40W	3,400lm	85	7lbs	D24" x W1.3" x H1.5"	3	1	1
D3	Direct	50W	4,250lm	85	11lbs	D36" x W1.3" x H1.5"	3	1	1
D4	Direct	80W	6,800lm	85	14lbs	D48" x W1.3" x H1.5"	4	2	1
D5	Direct	100W	8,500lm	85	17lbs	D60" x W1.3" x H1.5"	4	2	1

C CCT - DIRECT (CHOOSE ONE)

27	2700K
30	3000K
35	3500K
40	4000K

D MOUNTING

CM*	5FT Steel Cable, 10-Inch / 14-Inch Surface Mount Canopy, Integral Driver (Canopy size varies by fixture output)
CM2*	5FT Steel Cable, 11-Inch / 14-Inch Surface Mount Canopy w/Center-Ring, Integral Driver (Canopy size varies by fixture output)
QM*	5FT Steel Cable Direct Mount, 10-Inch/14-Inch Surface Mount Canopy, Integral Driver (Canopy size varies by fixture output)
*See compatible list on Pg 3-4	


E FINISH

MB	Black
MW	White
MS	Silver
CC*	Customized Color

*see Customized Color Chart on Pg 5

F OPTIONS

blank	120/277V 0-10V Dimming
FAD	Customized Output (Consult Factory)
BAA	Assembled in America, Compliant with BAA (COTS)

DIMENSIONS
Direct

FIXTURE MODEL

RV-86-D2

RV-86-D3

RV-86-D4

RV-86-D5

DIMENSION

D24" x W1.3" x H1.5"

D36" x W1.3" x H1.5"

D48" x W1.3" x H1.5"

D60" x W1.3" x H1.5"

D = Outer Diameter

MOUNTING CANOPY OPTION

CM-10", CM2-11", QM, SM

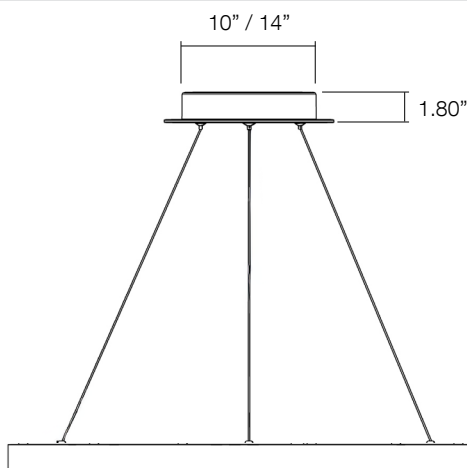
CM-10", CM2-11", QM, SM

CM-10", CM2-11", QM, SM

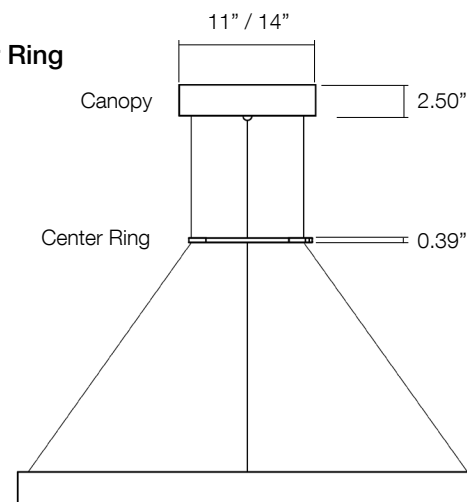
CM-14", CM2-14", QM, SM

MOUNTING OPTIONS
CM - Canopy Mount
FIXTURE CANOPY SIZE


RV-86-D2	10"
RV-86-D3	10"
RV-86-D4	10"
RV-86-D5	14"


CM2 - Canopy Mount w/Center Ring
FIXTURE CANOPY SIZE


RV-86-D2	11"
RV-86-D3	11"
RV-86-D4	11"
RV-86-D5	14"




ø11.02" (ø280mm)


11" Surface Mount Canopy


ø9.45" (ø240mm)


Center Ring w/Single Wire Hole

ø13.78" (ø350mm)


14" Surface Mount Canopy

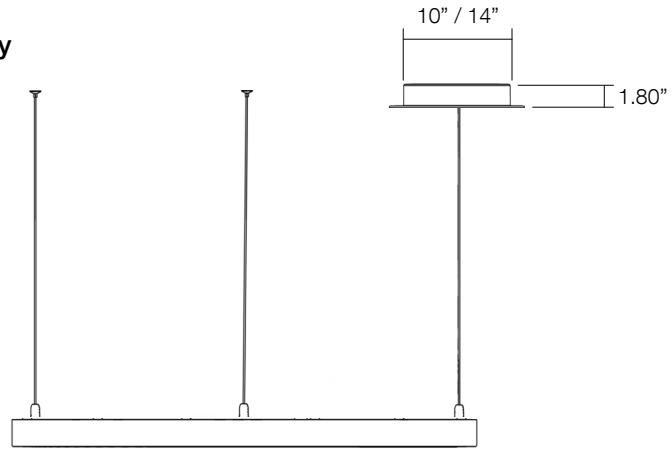
ø12.20" (ø310mm)


Center Ring w/Double Wire Hole

MOUNTING OPTIONS

QM - Quick Mount w/Surface Mount Canopy

FIXTURE	CANOPY SIZE
RV-86-D2	10"
RV-86-D3	10"
RV-86-D4	10"
RV-86-D5	14"



REVOLVE SERIES | RV-86

COLOR CHART (CHOOSE ONE)

CC
RAL

Specify Color Code:
Specify RAL Color:



GR - Green



BL - Blue



PP - Purple



PK - Pink



RD - Red



OG - Orange



YW - Yellow



MB - Matte Black



GB - Gloss Black



MW - Matte White



GW - Gloss White



OB - Oil Rubbed Bronze



GZ - Gloss Bronze



MS - Matte Silver



MBS - Matte Brass



GBS - Gloss Brass