


Non-Illuminated

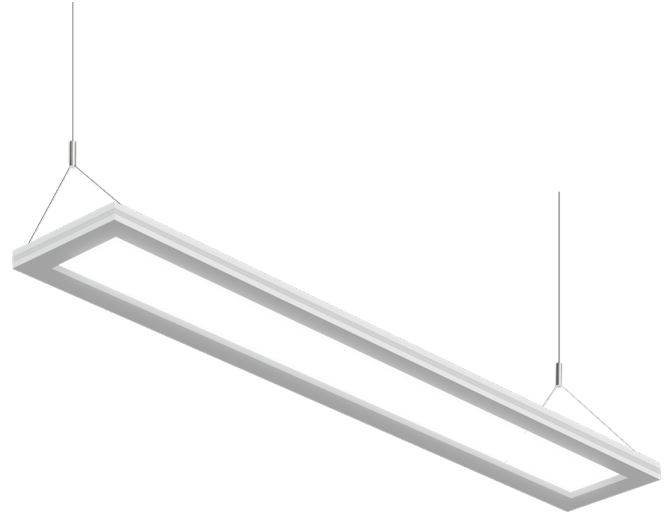

Illuminated

**Product Features**

LUMI Series - FOLIO - modern suspended architectural luminaire, semi-transparent optics panel, enveloped in ultra thin 1” aluminum frame. Edgelit illumination creates the “floating” effect, and offers soft direct-indirect illumination. Housing from aluminum extruded profile; available with standard matte White; linkable design for extended row mount installation; steel cable suspension system through surface canopy; 90CRI; field selectable CCT 3000K ~ 4000K; 88% of luminous flux after 50,000 hours; cULus damp location listed; universal power supply with 0-10v dimming capability.

**Technical Specifications**

INPUT VOLTAGE	Universal Input AC120-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	Field Selectable CCT 3000K, 3500K, 4000K
COLOR RENDERING INDEX	90+
DISTRIBUTION	Edgelit, 60% Direct - 40% Indirect
IP RATING	Damp Location
LIFE SPAN	>50,000 Hours
DIMMING	0-10v Dimming



## LUMI SERIES | FOLIO

### SUBMITTAL WORKSHEET

Order Code Example: **LMF**      **- L4**      **- SC**      **- QMR**      **- MS**      **- OPTIONS**  
 A                                      B                                      C                                      D                                      E                                      F

#### A SERIES (CHOOSE ONE)

**LMF**                      LUMI Series - Folio - Suspended Direct / Indirect Luminaire

#### B SIZE & OUTPUT (CHOOSE ONE)

CODE	DISTRIBUTION	POWER & LUMEN	LPW	DIMENSION
<b>L4</b> <b>QS</b>	Edgelit with 60% Direct - 40% Indirect	40W    4,255lm	106	L47.24" x W7.87" x H0.94"
<b>L8</b> <b>QS</b>	Edgelit with 60% Direct - 40% Indirect	80W    8,511lm	106	L94.48" x W7.87" x H0.94"

#### C CCT - DIRECT (CHOOSE ONE)

**SC**      **QS**                      Field Selectable 3000K / 3500K / 4000K

#### D MOUNTING

<b>QMR</b> <b>QS</b>	5FT Suspension, 5FT White Power Cord, 4.5-Inch Round J-box Plate & 1.6-Inch Mounting Plate
<b>QMS</b> <b>QS</b>	5FT Suspension, 5FT White Power Cord, 4.5-Inch Square J-box Plate & 1.6-Inch Mounting Plate
<b>QMR-T</b> <b>QS</b>	5FT Suspension, 5FT White Power Cord, 4.5-Inch Round J-box Plate & 1.6-Inch Mounting Plate with Adjustable T-Bar Clip
<b>QMS-T</b> <b>QS</b>	5FT Suspension, 5FT White Power Cord, 4.5-Inch Square J-box Plate & 1.6-Inch Mounting Plate with Adjustable T-Bar Clip
<b>RMB</b> <b>QS</b>	Row Mount Bracket - see pg. 5, 6, 7 for detail - 4" Octagon box included, adjustable T-bar clip suitable for 9/16" Flat, 9/16" Slot, 15/16" Flat T-bar grid spec

#### E FINISH

**MW**      **QS**                      Matte White


#### F OPTIONS

<b>blank</b>	120/277V 0-10V Dimming
<b>BAA</b>	Assembled in America, Compliant with BAA (COTS)
<b>CLIP-B</b>	Butterfly Clip
<b>DROP-12</b>	12FT Suspension, 12FT White Power Cord
<b>-T</b>	Adjustable T-Bar Clip
<b>EMB-H08170*</b> <b>QS</b>	Self-Diagnostic Emergency Battery 8W 100-347VAC Input 170VDC Output
<b>EMB-H18170*</b> <b>QS</b>	Self-Diagnostic Emergency Battery 18W 100-347VAC Input 170VDC Output

\*see pg 4 for spec


**LUMI SERIES | FOLIO**

**DIMENSIONS**

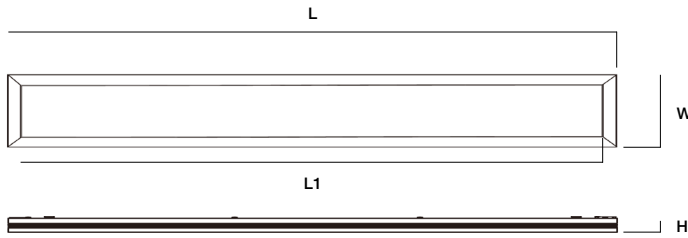


SIZE	DIMENSION			
	L	L1	W	H
L4	47.24"	45.03"	7.87"	0.94"
L8	94.48"	92.10"	7.87"	0.94"

**Quick Mount**

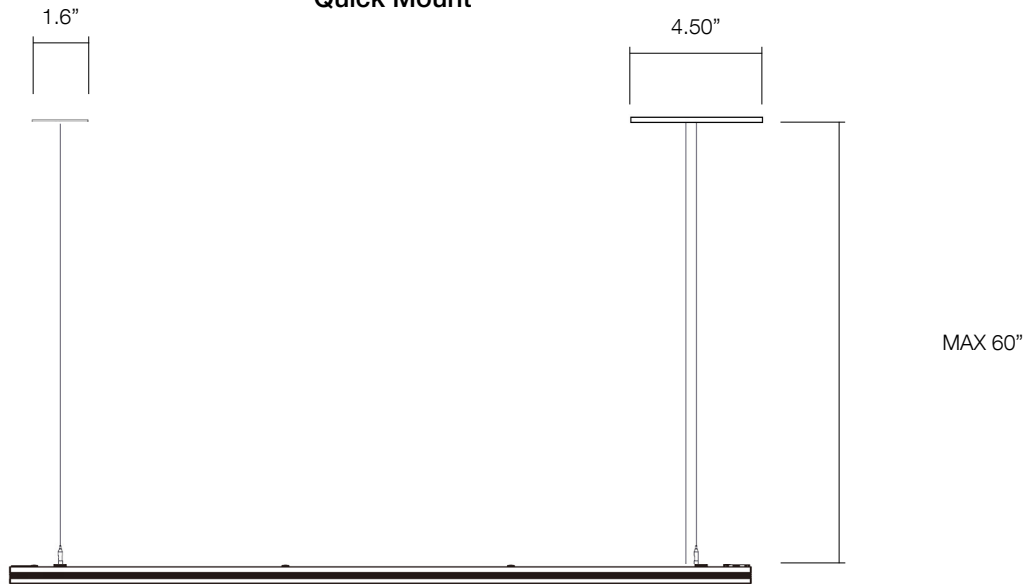


**PERFORMANCE**

Maximum Candela = 605.83  
 Located At Horizontal Angle = 90, Vertical Angle = 44.5  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180)  
 # 2 - Horizontal Cone Through Vertical Angle (44.5) (Through Max. Cd.)

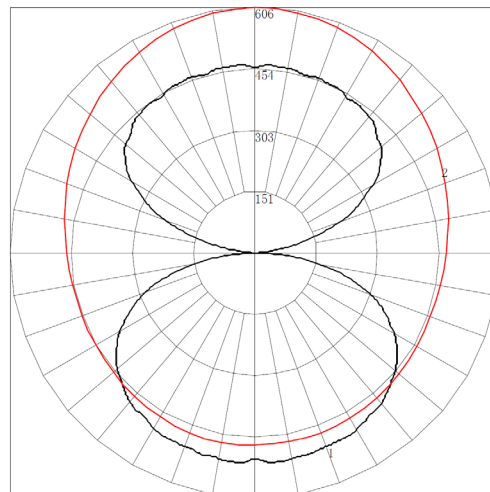

**EMB SPEC**


Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-H08170	90mins	100-347VAC	170VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Field Install
EMB-H18170	90mins	100-347VAC	170VDC	18W	0°C ~ 50°C 32°F ~ 122°F	Field Install

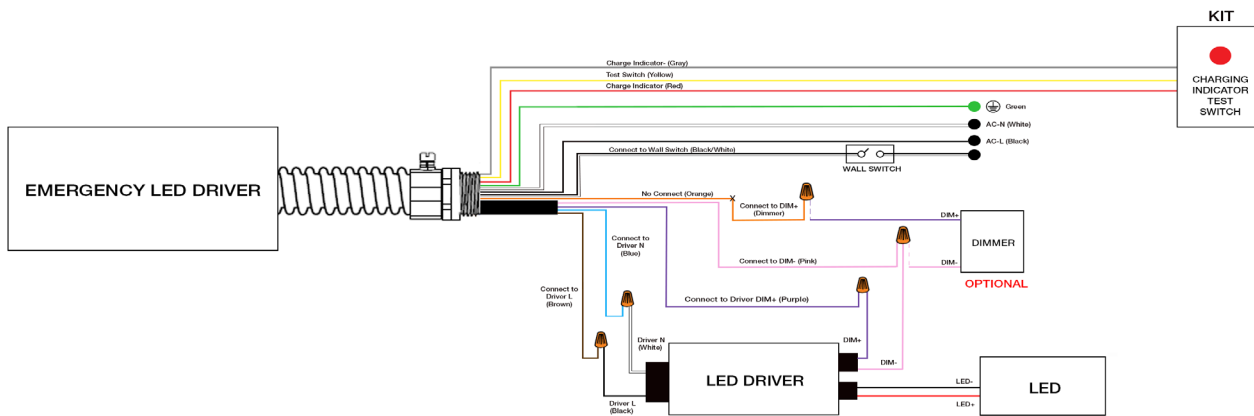

**INSTALLATION**


**Drywall / Ceiling Tile Install**

Part# QMR / QMS

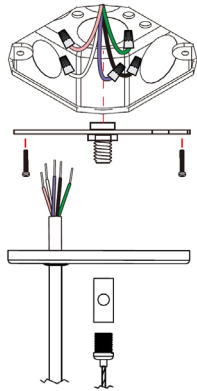


4.5-inch J-box plate  
for direct wiring with input & dimming source  
J-box plate supports (1) cable suspension

Part# QMR / QMS

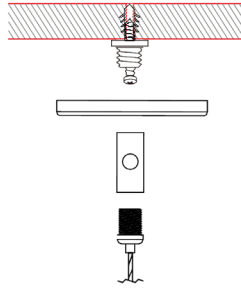

1.6-inch mounting plate  
with drywall anchor  
(1) cable suspension


Optional: Butterfly Clips  
Part#CLIP-B

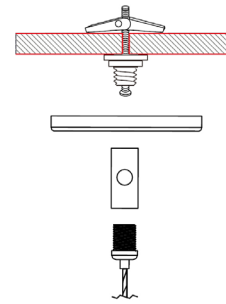

1.6-inch mounting plate  
with butterfly clips  
(1) cable suspension


**T-Grid Install**

Part# QMR-T / QMS-T

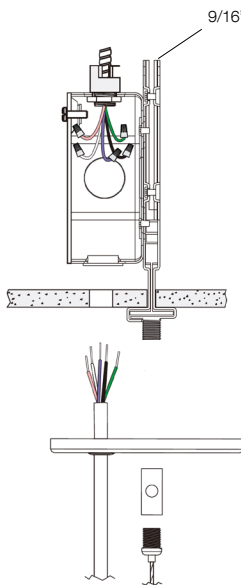

4.5-inch J-box plate  
Adjustable T-Bar Clip\*  
4" Octagon Box included with T-Bar Clip  
J-box plate supports (1) cable suspension

Part# QMR-T / QMS-T

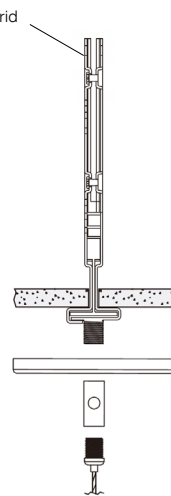


1.6-inch mounting plate  
Adjustable T-Bar Clip\*  
(1) cable suspension


\*suitable for 9/16" Flat, 9/16" Slot, 15/16" Flat T-bar grid spec

**INSTALLATION**

**L4 - 4FT Stand-Alone Install**

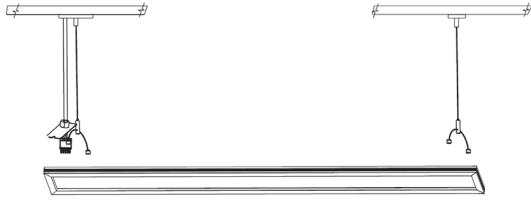

**L8 - 8FT Stand-Alone Install**

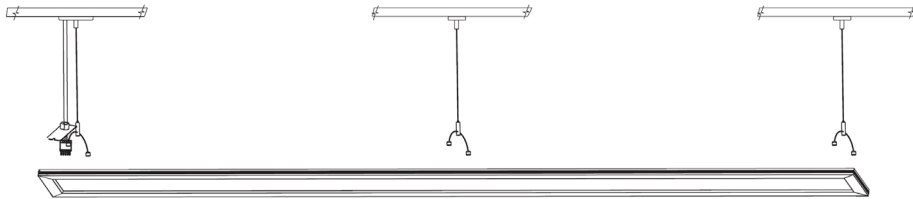

**Row Mount Install**



Row Mount Assembly (see Pg 6)