



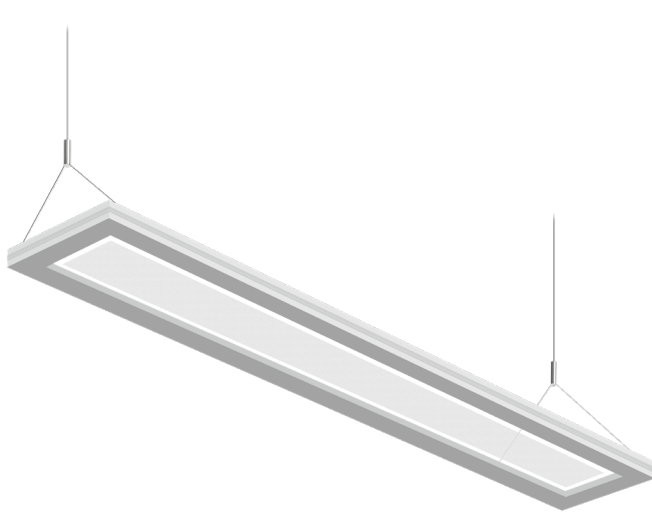

Non-Illuminated

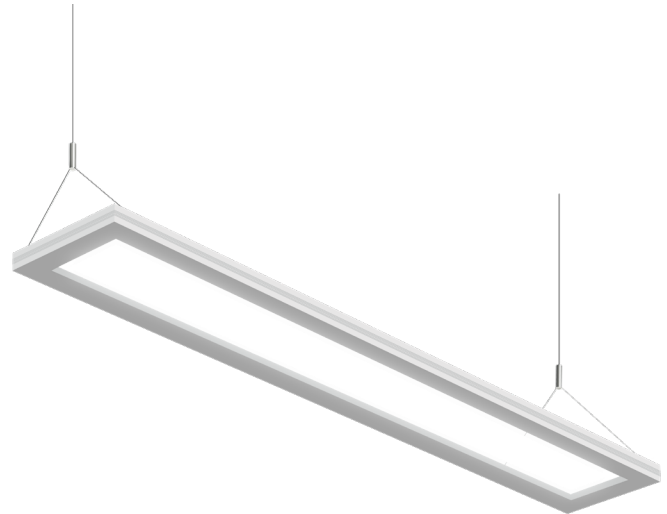

Illuminated

Product Features

LUMI Series - FOLIO - modern suspended architectural luminaire, semi-transparent optics panel, enveloped in ultra thin 1" aluminum frame. Edgelit illumination creates the "floating" effect, and offers soft direct-indirect illumination. Housing from aluminum extruded profile; available with standard matte White; linkable design for extended row mount installation; steel cable suspension system through surface canopy; 90CRI; field selectable CCT 3000K ~ 4000K; 88% of luminous flux after 50,000 hours; cULus damp location listed; universal power supply with 0-10v dimming capability.

Technical Specifications

INPUT VOLTAGE	Universal Input AC120-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	Field Selectable CCT 3000K, 3500K, 4000K
COLOR RENDERING INDEX	90+
DISTRIBUTION	Edgelit, 60% Direct - 40% Indirect
IP RATING	Damp Location
LIFE SPAN	>50,000 Hours
DIMMING	0-10v Dimming



LUMI SERIES | FOLIO

SUBMITTAL WORKSHEET

Order Code Example: **LMF** **- L4** **- SC** **- QMR** **- MS** **- OPTIONS**
 A **B** **C** **D** **E** **F**

A SERIES (CHOOSE ONE)

LMF LUMI Series - Folio - Suspended Direct / Indirect Luminaire

B SIZE & OUTPUT (CHOOSE ONE)

CODE	DISTRIBUTION	POWER & LUMEN	LPW	DIMENSION
L4 QS	Edgelit with 60% Direct - 40% Indirect	40W 4,255lm	106	L47.24" x W7.87" x H0.94"
L8 QS	Edgelit with 60% Direct - 40% Indirect	80W 8,511lm	106	L94.48" x W7.87" x H0.94"

C CCT - DIRECT (CHOOSE ONE)

SC **QS** Field Selectable 3000K / 3500K / 4000K

D MOUNTING

QMR **QS** 5FT Suspension, 5FT White Power Cord, 4.5-Inch Round J-box Plate & 1.6-Inch Mounting Plate
QMS **QS** 5FT Suspension, 5FT White Power Cord, 4.5-Inch Square J-box Plate & 1.6-Inch Mounting Plate

QMR-T **QS** 5FT Suspension, 5FT White Power Cord, 4.5-Inch Round J-box Plate & 1.6-Inch Mounting Plate with Adjustable T-Bar Clip
QMS-T **QS** 5FT Suspension, 5FT White Power Cord, 4.5-Inch Square J-box Plate & 1.6-Inch Mounting Plate with Adjustable T-Bar Clip

RMB **QS** Row Mount Bracket
 - see pg. 5, 6, 7 for detail
 - 4" Octagon box included, adjustable T-bar clip suitable for 9/16" Flat, 9/16" Slot, 15/16" Flat T-bar grid spec

E FINISH

MW **QS** Matte White


F OPTIONS

blank 120/277V 0-10V Dimming
BAA Assembled in America, Compliant with BAA (COTS)
CLIP-B Butterfly Clip
DROP-12 12FT Suspension, 12FT White Power Cord
-T Adjustable T-Bar Clip
EMB-H08170* **QS** Self-Diagnostic Emergency Battery 8W 100-347VAC Input 170VDC Output
EMB-H18170* **QS** Self-Diagnostic Emergency Battery 18W 100-347VAC Input 170VDC Output

*see pg 4 for spec


LUMI SERIES | FOLIO

DIMENSIONS

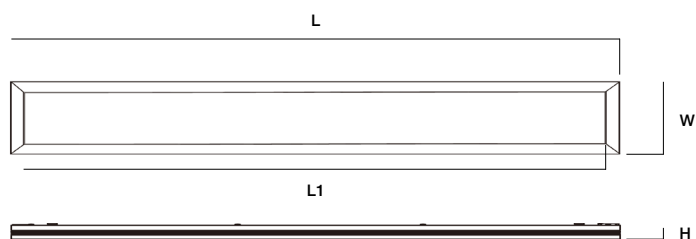


SIZE	DIMENSION			
	L	L1	W	H
L4	47.24"	45.03"	7.87"	0.94"
L8	94.48"	92.10"	7.87"	0.94"

Quick Mount

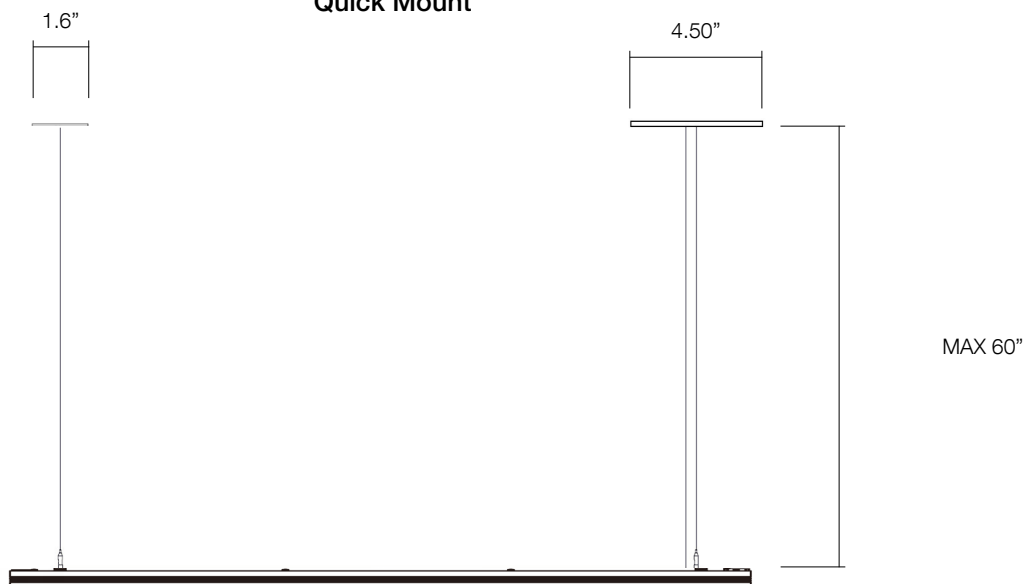


PERFORMANCE

Maximum Candela = 605.83
 Located At Horizontal Angle = 90, Vertical Angle = 44.5
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180)
 # 2 - Horizontal Cone Through Vertical Angle (44.5) (Through Max. Cd.)

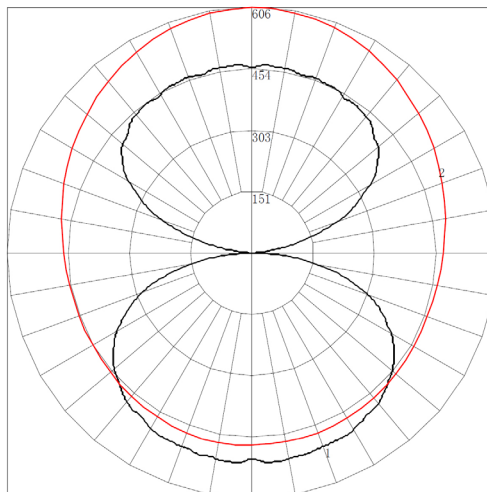

EMB SPEC


Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-H08170	90mins	100-347VAC	170VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Field Install
EMB-H18170	90mins	100-347VAC	170VDC	18W	0°C ~ 50°C 32°F ~ 122°F	Field Install

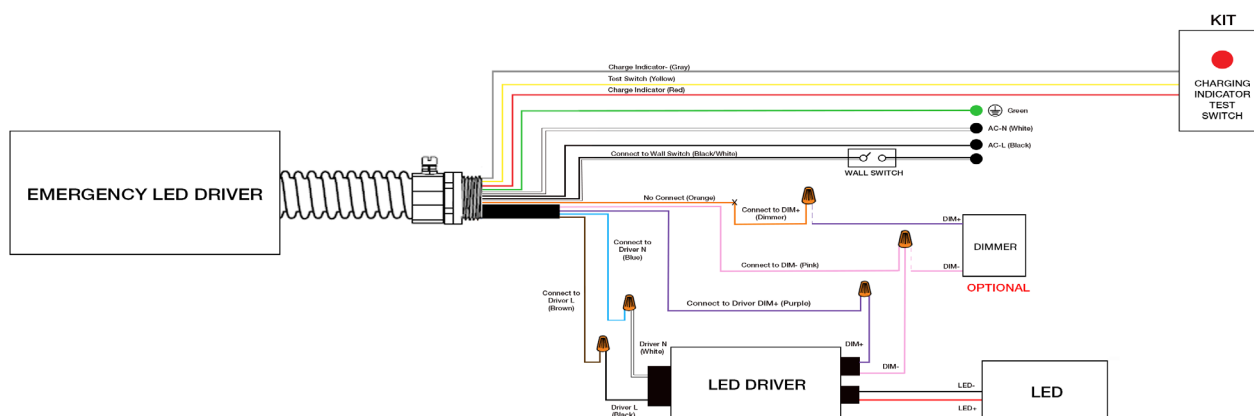

INSTALLATION


Drywall / Ceiling Tile Install

Part# QMR / QMS

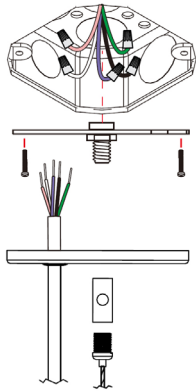


4.5-inch J-box plate
for direct wiring with input & dimming source
J-box plate supports (1) cable suspension

Part# QMR / QMS



1.6-inch mounting plate
with drywall anchor
(1) cable suspension


Optional: Butterfly Clips
Part#CLIP-B



1.6-inch mounting plate
with butterfly clips
(1) cable suspension


T-Grid Install

Part# QMR-T / QMS-T

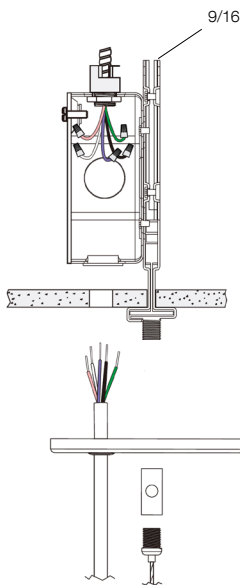

4.5-inch J-box plate
Adjustable T-Bar Clip*
4" Octagon Box included with T-Bar Clip
J-box plate supports (1) cable suspension

Part# QMR-T / QMS-T

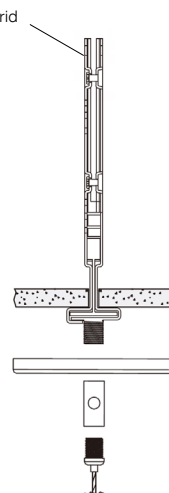

1.6-inch mounting plate
Adjustable T-Bar Clip*
(1) cable suspension


*suitable for 9/16" Flat, 9/16" Slot, 15/16" Flat T-bar grid spec

INSTALLATION

L4 - 4FT Stand-Alone Install



L8 - 8FT Stand-Alone Install

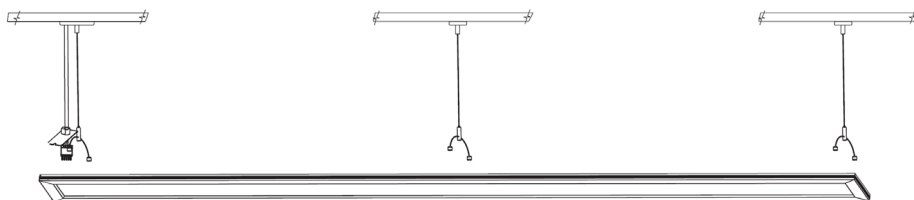

Row Mount Install



Row Mount Assembly (see Pg 6)