
ALLURE ARCHITECTURAL®

HEXA SERIES | HCX

Client:
Project:
Type:
Quantity:

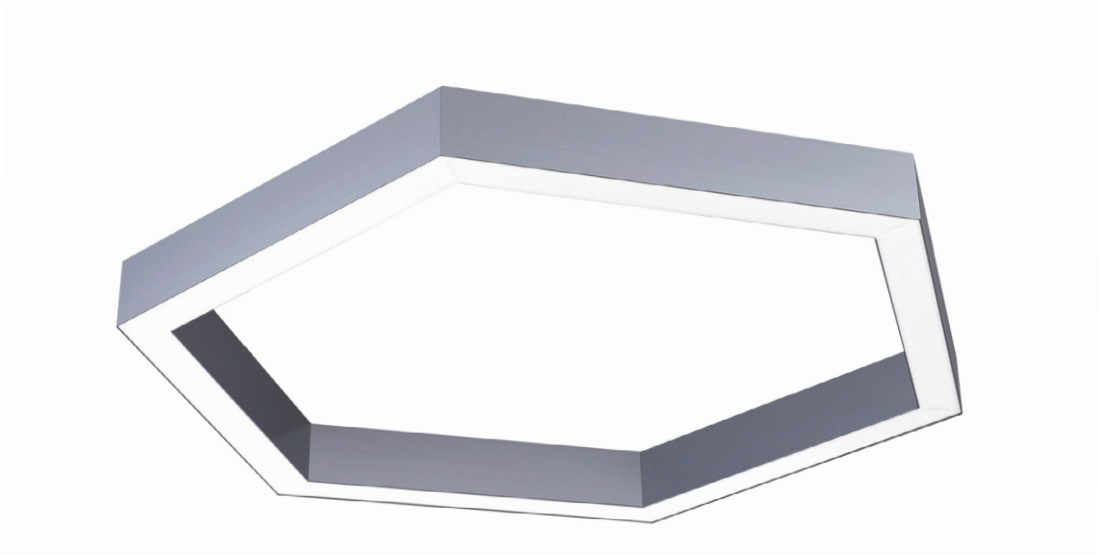

Product Features

ALLURE Hexa Series Honeycomb center hollow hexagon shaped architectural luminaire housing from aluminum extruded profile, seamlessly welded; available with standard matte Black, White, Silver or custom RAL finish; available with steel cable suspension system through surface, canopy, or direct ceiling mount, with power supply unit integral inside fixture, and power feed cable through the 5-inch junction box to cover plate; entire luminaire homogeneously illuminated, laser-cut frosted PMMA lens; soft 100% direct, or 70% direct with 30% indirect illumination characteristic for general illumination and maximum visual comfort; SAMSUNG LED with above 90CRI; available in 2700K, 3000K, 3500K, 4000K; 85% of luminous flux after 50000 hours; ETL damp location listed; universal power supply with 0-10v dimming capability.

Technical Specifications

INPUT VOLTAGE	Universal Input AC120-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K
COLOR RENDERING INDEX	90
DISTRIBUTION	Direct, Direct/Indirect
IP RATING	Damp Location
LIFE SPAN	50,000 Hours
DIMMING	0-10v Dimming

All Rights Reserved
Specifications and dimensions
subject to change without notice

ALLURE ARCHITECTURAL®

HEXA SERIES | HCX

SUBMITTAL WORKSHEET

Order Code Example: HCX - H1 - 40 - QM - MW - WH - OPTIONS
A B C D E F G

A SERIES (CHOOSE ONE)

HCX	Hexa Honeycomb Series Center Hollow Hexagon Shaped Luminaire

B SIZE & OUTPUT (CHOOSE ONE)

CODE	DISTRIBUTION	POWER & LUMEN	LPW	DIMENSION	SUSPENSION	DRIVER	SECTION
☐ **H1**	Direct	25W 2,625lm	105	16.4" x 18.9" x 3.1"	3	1	1
☐ **H2**	Direct	40W 4,200lm	105	20.5" x 23.6" x 3.1"	4	1	1
☐ **H3**	Direct	90W 9,450lm	105	30.7" x 35.4" x 3.1"	4	2	1
☐ **H4**	Direct	180W 18,900lm	105	40.9" x 47.2" x 3.1"	6	2	1
☐ **HC (Custom)**	Direct		105	x 3.1"			
☐ **UH1 - 70/30**	Direct / Indirect	40W 2,750/1,575lm	105	16.4" x 18.9" x 3.6"	3	2	1
☐ **UH2 - 70/30**	Direct / Indirect	60W 4,200/2,100lm	105	20.5" x 23.6" x 3.6"	4	2	1
☐ **UH3 - 70/30**	Direct / Indirect	120W 9,450/3,150lm	105	30.7" x 35.4" x 3.6"	4	3	1
☐ **UH4 - 70/30**	Direct / Indirect	240W 18,900/6,300lm	105	40.9" x 47.2" x 3.6"	6	3	1
☐ **UHC (Custom)**	Direct / Indirect		105	x 3.6"			

C CCT (CHOOSE ONE)

☐ **27**	2700K	☐ **35**	3500K
☐ **30**	3000K	☐ **40**	4000K

D MOUNTING (CHOOSE ONE)

☐ **QM**	5FT Steel Cable Direct Mount, 5-Inch Junction Box Cover Plate With Integral Driver (120/277V 0-10V Dimming)
☐ **CM**	5FT Steel Cable, 10-Inch Surface Mount Canopy With Integral Driver

E FINISH (CHOOSE ONE)

☐ **MB**	Black	☐ **MS**	Silver
☐ **MW**	White	☐ **CC***	Customized Color

*see Customized Color Chart on pg 4

F POWER CORD (CHOOSE ONE)

☐ **BK**	5FT Black Power Cord
☐ **WH**	5FT White Power Cord

G OPTIONS

☐ **blank**	120/277V 0-10V Dimming
☐ **FAD**	Customized Output (Consult Factory)

ALLURE ARCHITECTURAL®
14750 East Nelson Ave Unit B
City of Industry, CA 91744
P: 909-598-1077
www.allureltg.com


ALS Advantage Lighting Solutions
ALLURE ARCHITECTURAL® an Advantage Lighting Solutions® brand
All Rights Reserved
Specifications and dimensions subject to change without notice

ALLURE ARCHITECTURAL®


HEXA SERIES | HCX

DIMENSIONS


SERIES & SIZE	DIMENSION	
HCX-H1	A16.4” x B18.9” x T3.1”	C = 9.45”
HCX-H2	A20.5” x B23.6” x T3.1”	C = 11.8”
HCX-H3	A30.7” x B35.4” x T3.1”	C = 17.7”
HCX-H4	A40.9” x B47.2” x T3.1”	C = 23.6”
HCX-HC	x T3.1”	C =
HCX-UH1	A16.4” x B18.9” x T3.6”	C = 9.45”
HCX-UH2	A20.5” x B23.6” x T3.6”	C = 11.8”
HCX-UH3	A30.7” x B35.4” x T3.6”	C = 17.7”
HCX-UH4	A40.9” x B47.2” x T3.6”	C = 23.6”
HCX-UHC	x T3.6”	C =

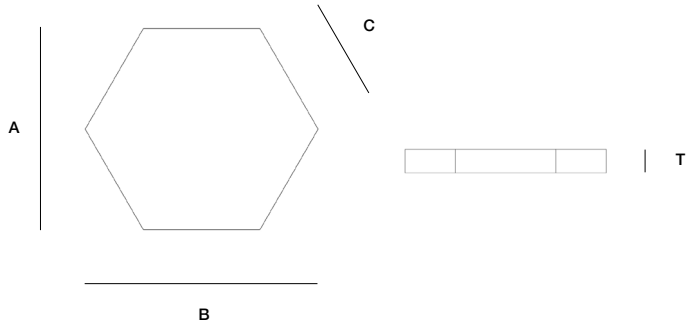

Quick Mount

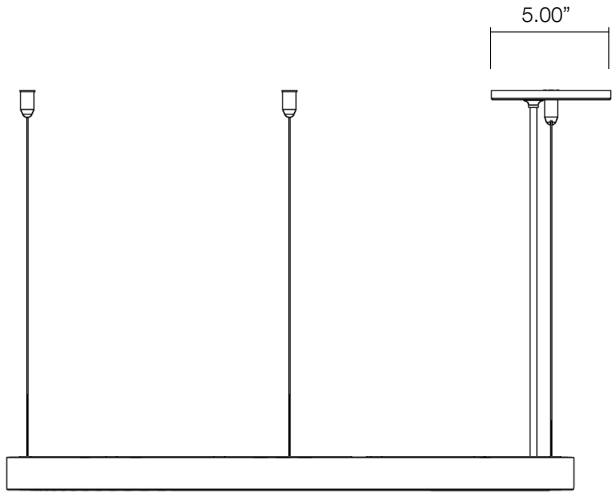

Canopy Mount

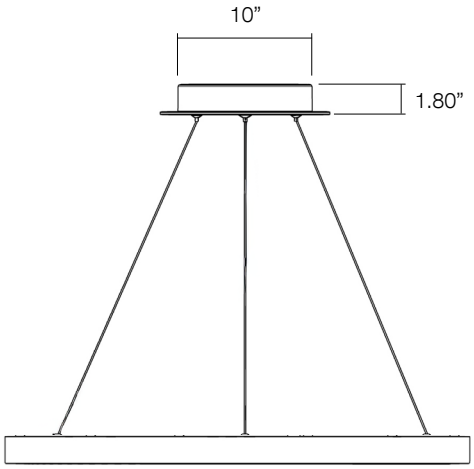

ALLURE ARCHITECTURAL®
an Advantage Lighting Solutions® brand
All Rights Reserved
Specifications and dimensions
subject to change without notice

ALLURE ARCHITECTURAL®

HEXA SERIES | HCX

COLOR CHART (CHOOSE ONE)

☐ **CC** Specify Color Code:

☐ **RAL** Specify RAL Color:


GR - Green


BL - Blue


PP - Purple


PK - Pink


RD - Red


OG - Orange


YW - Yellow


MB - Matte Black


GB - Gloss Black


MW - Matte White


GW - Gloss White


OB - Oil Rubbed Bronze


GZ - Gloss Bronze


MS - Matte Silver


MBS - Matte Brass


GBS - Gloss Brass


CNH285 - American Walnut


QL0928 - European Cherry


QL0503 - Light Oak


QL0411 - Maple


QL0908 - Palisander Santos

ALLURE ARCHITECTURAL®
14750 East Nelson Ave Unit B
City of Industry, CA 91744
P: 909-598-1077
www.allureltg.com

ALLURE ARCHITECTURAL®
an Advantage Lighting Solutions® brand
All Rights Reserved
Specifications and dimensions
subject to change without notice