


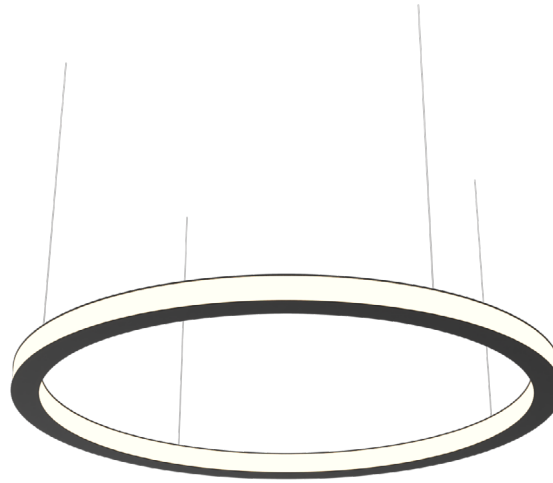

Inner / Outer

Product Features

ALLURE Revolve Series 85 - Ring shaped architectural luminaire housing from rolled aluminum extruded profile, seamlessly welded; available with matte Black, White, Silver or custom RAL finish; offered with steel cable suspension system through surface or direct ceiling mount, entire luminaire homogeneously illuminated, ring shaped frosted PMMA lens; available with inner and outer facing emission; SAMSUNG LED with above 90CRI; available in 2700K, 3000K, 3500K, 4000K, 85% of luminous flux after 50,000 hours; ETL damp location listed; universal power supply with 0-10V dimmable.

Technical Specifications

INPUT VOLTAGE	Universal Input AC120-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K
COLOR RENDERING INDEX	90
DISTRIBUTION	Inner & Outer
IP RATING	Damp Location
LIFE SPAN	>50,000 Hours
DIMMING	0-10v Dimming





Order Code Example: **RV-85** - **IO3** - **40** - **QM** - **MW** - **WH** - **OPTIONS**

A B C D E F G

RV-85 Revolve Series Suspended Ring Shaped Inner and Outer Emitting Luminaire

CODE	DISTRIBUTION	POWER & LUMEN		LPW	DIMENSION	SUSPENSION	DRIVER	SECTION
IO2	Inner / Outer	50W	4,250lm	74	D24" x W1.4" x H1.3"	3	2	1
IO3	Inner / Outer	60W	5,100lm	74	D36" x W1.4" x H1.3"	3	2	1
IO4	Inner / Outer	80W	6,800lm	74	D48" x W1.4" x H1.3"	4	2	1
IO5	Inner / Outer	100W	8,500lm	74	D60" x W1.4" x H1.3"	4	2	1

27	2700K
30	3000K
35	3500K
40	4000K


CM*	5FT Steel Cable, 10-Inch/14-Inch Surface Mount Canopy, Integral Driver (Canopy size varies by fixture output)
CM2*	5FT Steel Cable, 11-Inch/14-Inch Surface Mount Canopy, Integral Driver (Canopy size varies by fixture output)
QM*	5FT Steel Cable Direct Mount, 10-Inch/14-Inch Surface Mount Canopy, Integral Driver (Canopy size varies by fixture output)
SM	Surface Mount Kit, Remote Driver Enclosure

*See compatible list on Pg 3

MB	Black
MW	White
MS	Silver
CC*	Customized Color

BK	Standard 5FT Black Power Cord / Specify Length ____ FT (Suspension cable length will match)
WH	Standard 5FT White Power Cord / Specify Length ____ FT (Suspension cable length will match)

blank	120/277V 0-10V Dimming
FAD	Customized Output (Consult Factory) Specify Lumen
BAA	Assembled in America, Compliant with BAA (COTS)

DIMENSIONS
INNER & OUTER

FIXTURE MODEL

RV-85-IO2
 RV-85-IO3
 RV-85-IO4
 RV-85-IO5

DIMENSION


D24" x W1.4" x H1.3"
 D36" x W1.4" x H1.3"
 D48" x W1.4" x H1.3"
 D60" x W1.4" x H1.3"
 D = Outer Diameter

MOUNTING CANOPY OPTION


CM-10", CM2-11", QM, SM
 CM-10", CM2-11", QM, SM
 CM-10", CM2-11", QM, SM
 CM-14", CM2-14", QM, SM

MOUNTING OPTIONS
CM - Canopy Mount


FIXTURE	CANOPY SIZE
RV-85-IO2	10"
RV-85-IO3	10"
RV-85-IO4	10"
RV-85-IO5	14"

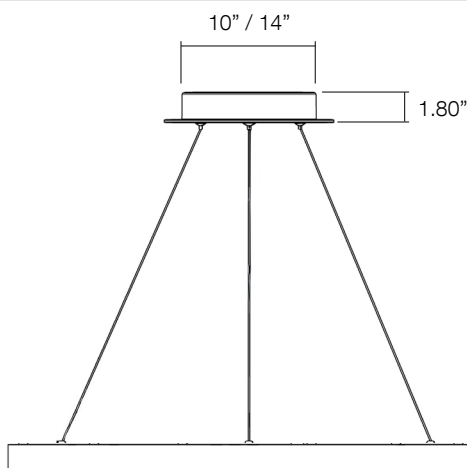
CM2 - Canopy Mount w/Center Ring

FIXTURE	CANOPY SIZE
RV-85-IO2	11"
RV-85-IO3	11"
RV-85-IO4	11"
RV-85-IO5	14"

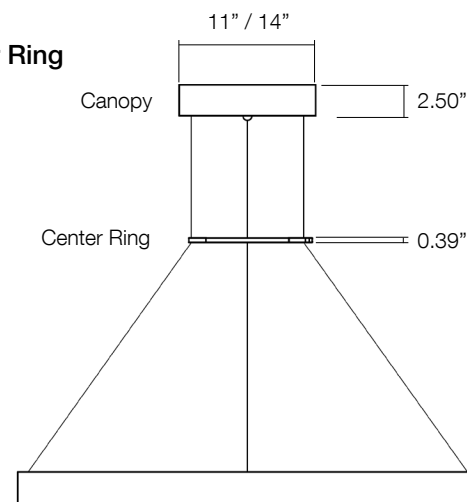


ø11.02" (ø280mm)




**11" Surface Mount
Canopy**

ø9.45" (ø240mm)




**Center Ring
w/Single Wire Hole**

ø13.78" (ø350mm)



**14" Surface Mount
Canopy**

ø12.20" (ø310mm)




**Center Ring
w/Double Wire Hole**

MOUNTING OPTIONS

QM - Quick Mount w/Surface Mount Canopy

FIXTURE	CANOPY SIZE
RV-85-IO2	10"
RV-85-IO3	10"
RV-85-IO4	10"
RV-85-IO5	14"

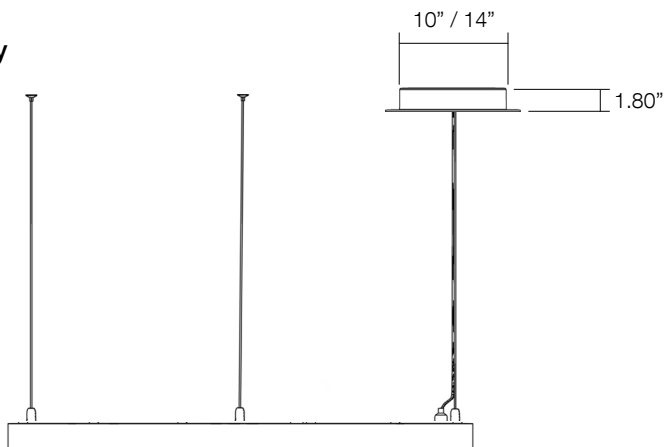

COLOR CHART (CHOOSE ONE)

CC
RAL

Specify Color Code:
Specify RAL Color:

						
GR - Green	BL - Blue	PP - Purple	PK - Pink	RD - Red	OG - Orange	YW - Yellow
						
MB - Matte Black	GB - Gloss Black	MW - Matte White	GW - Gloss White	OB - Oil Rubbed Bronze	GZ - Gloss Bronze	MS - Matte Silver
						
MBS - Matte Brass	GBS - Gloss Brass	CNH285 - American Walnut	QL0928 - European Cherry	QL0503 - Light Oak	QL0411 - Maple	QL0908 - Palisander Santos