

Illuminated

Non-Illuminated

**Product Features**

LUMI BLADE Series - Suspended version - modern architectural luminaire, ultra-thin transparent optics panel, enveloped in a signature “I-beam” shaped frame. Edgelit illumination creates the “floating” effect. Housing from aluminum extruded profile; available with standard matte White finish; steel cable suspension system through surface canopy; 90CRI; field selectable CCT 3000K ~ 4000K; 88% of luminous flux after 50000 hours; cULus damp location listed; universal power supply 0-10v dimming capability.

**Technical Specifications**


INPUT VOLTAGE	Universal Input AC120-277V
FREQUENCY	50/60hz
LUMEN	2028 - 4026LM
WATTAGE	20 - 40W
LPW	95 - 102
COLOR TEMPERATURE	Field Selectable CCT 3000K, 3500K, 4000K
COLOR RENDERING INDEX	90+
DISTRIBUTION	Edgelit - Asymmetric distribution
IP RATING	Damp Location
LIFE SPAN	>50,000 Hours
DIMMING	0-10v Dimming






## LUMI BLADE SERIES | SUSPENDED

### DIMENSIONS

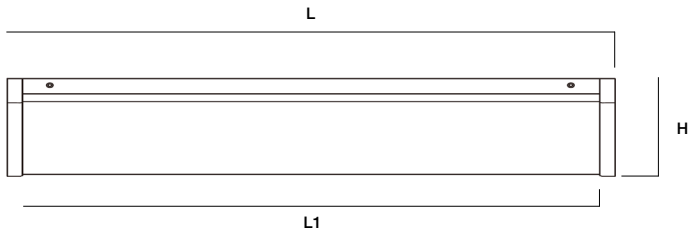


SIZE	DIMENSION				
	L	L1	W	W1	H
L2	23.64"	22.46"	1.59"	0.57"	5.34"
L3	35.46"	34.28"	1.59"	0.57"	5.34"
L4	47.28"	46.10"	1.59"	0.57"	5.34"

### Quick Mount

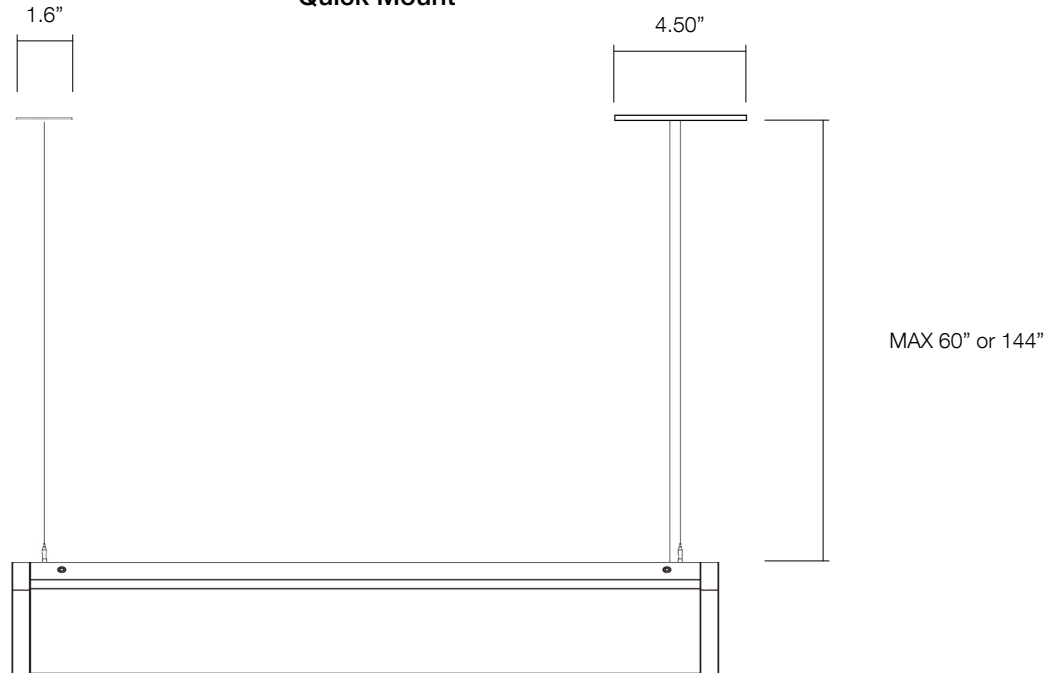

### PERFORMANCE


Maximum Candela = 761.1 Located At Horizontal Angle = 270, Vertical Angle = 27  
 # 1 - Vertical Plane Through Horizontal Angles (270 - 90) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (27) (Through Max. Cd.)

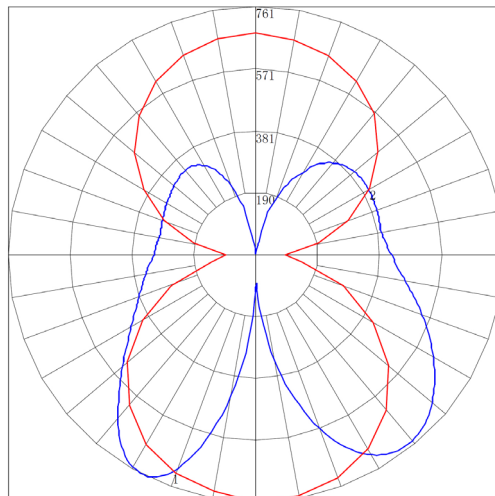

## LUMI BLADE SERIES | SUSPENDED

### EMB SPEC

Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-H08170	90mins	100-347VAC	170VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Field Install
EMB-H18170	90mins	100-347VAC	170VDC	18W	0°C ~ 50°C 32°F ~ 122°F	Field Install

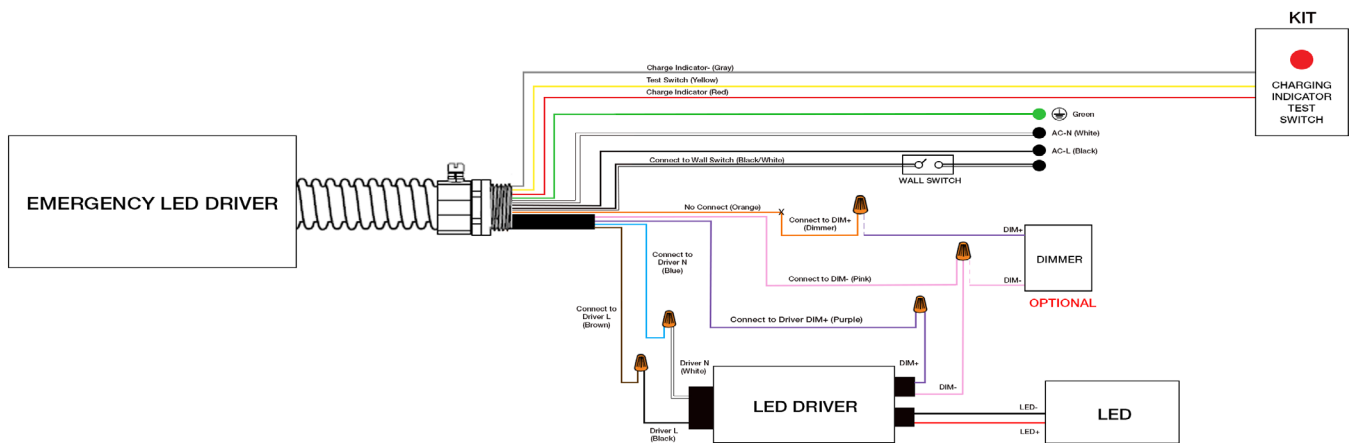


## LUMI BLADE SERIES | SUSPENDED

### INSTALLATION


#### Drywall / Ceiling Tile Install

Part# QMR / QMS

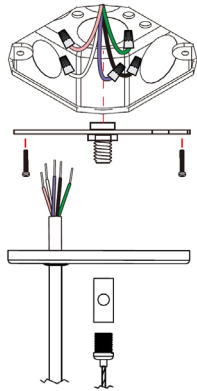


4.5-inch J-box plate  
for direct wiring with input & dimming source  
J-box plate supports (1) cable suspension

Part# QMR / QMS

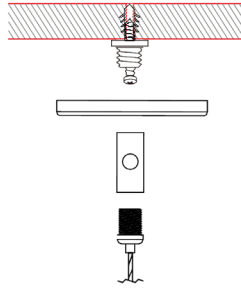

1.6-inch mounting plate  
with drywall anchor  
(1) cable suspension


Optional: Butterfly Clips  
Part#CLIP-B



1.6-inch mounting plate  
with butterfly clips  
(1) cable suspension


#### T-Grid Install

Part# QMR-T / QMS-T

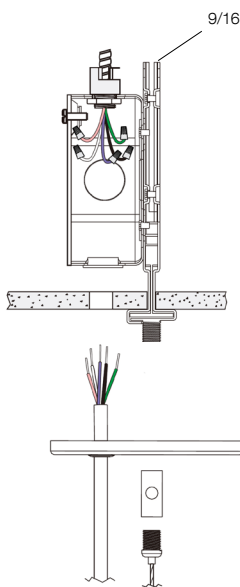

4.5-inch J-box plate  
Adjustable T-Bar Clip\*  
4" Octagon Box included with T-Bar Clip  
J-box plate supports (1) cable suspension

Part# QMR-T / QMS-T

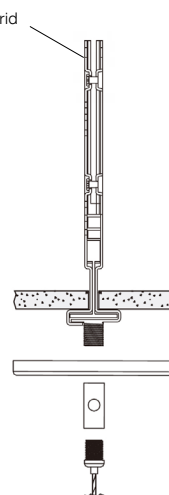

1.6-inch mounting plate  
Adjustable T-Bar Clip\*  
(1) cable suspension

\*suitable for 9/16" Flat, 9/16" Slot, 15/16" Flat T-bar grid spec