






LUX SERIES | LX2

Client:
Project:
Type:
Quantity:

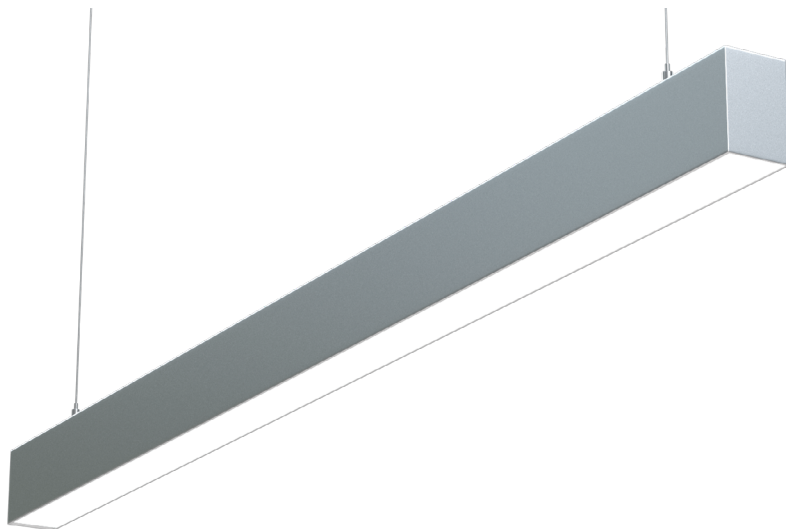

Direct



Direct
Indirect

Product Features

LUX Series LX2 linear architectural luminaire housing from 2" wide aluminum extruded profile, offered in 2, 4, 5, 6, and 8-FT length profile, available with matte Black, White, Silver or custom RAL finish; steel cable suspension system for direct ceiling mounting, with power supply unit integral inside fixture, and power feed cable through the 5-inch junction box cover plate; entire luminaire homogeneously illuminated, frosted PMMA lens; emits even direct facing illumination characteristic for general illumination and soft indirect for maximum visual comfort; SAMSUNG LED with above 90CRI; available in 2700K, 3000K, 3500K, 4000K; 85% of luminous flux after 50,000 hours; ETL damp location listed; universal power supply with 0-10v dimming capability.

Technical Specifications

INPUT VOLTAGE	Universal Input AC120-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	2700, 3000K, 3500K, 4000K
COLOR RENDERING INDEX	90
DISTRIBUTION	Direct, Direct/Indirect
IP RATING	Damp Location
LIFE SPAN	>50,000 Hours
DIMMING	0-10v Dimming





Order Code Example: **LX2** - **L2** - **35** - **QM** - **MW** - **WH** - **OPTIONS**

A B C D E F G

LX2 LUX Series 2" Channel Linear Architectural Luminaire

CODE		DISTRIBUTION	POWER & LUMEN		LPW	DIMENSION	SUSPENSION	DRIVER	SECTION
L2	QS	Direct	20W	2,100lm	105	L24" x W2" x H3"	2	1	1
L4		Direct	40W	4,200lm	105	L48" x W2" x H3"	2	1	1
L5		Direct	50W	5,250lm	105	L60" x W2" x H3"	2	1	1
L6	QS	Direct	60W	6,300lm	105	L72" x W2" x H3"	2	1	1
L8		Direct	80W	8,400lm	105	L96" x W2" x H3"	2	2	1
IL2	QS	Direct / Indirect	30W	3,150lm	105	L24" x W2" x H3.5"	2	1	1
IL4		Direct / Indirect	50W	5,250lm	105	L48" x W2" x H3.5"	2	1	1
IL5		Direct / Indirect	70W	7,350lm	105	L60" x W2" x H3.5"	2	1	1
IL6	QS	Direct / Indirect	80W	8,400lm	105	L72" x W2" x H3.5"	2	2	1
IL8		Direct / Indirect	100W	10,500lm	105	L96" x W2" x H3.5"	2	3	1
ILX		Direct / Indirect	Custom			Custom	Custom		

27		2700K	35	QS	3500K
30	QS	3000K	40	QS	4000K

QM	QS	5FT Steel Cable Direct Mount, 5-Inch Junction Box Cover Plate With Integral Driver
SM	QS	Surface Mount Kit (SUITABLE FOR DIRECT DISTRIBUTION ONLY)

MB	QS	Black	MS	Silver
MW	QS	White	CC*	Customized Color

*see Customized Color Chart on pg 3

BK	QS	5FT Black Power Cord
WH	QS	5FT White Power Cord

blank	Integral Driver 120/277V 0-10V Dimming
BAA	Assembled in America, Compliant with BAA (COTS)
TW	Adjustable CCT Wall Controller
FAD	Customized Output (Consult Factory)
LX2-CON	Inline Connector For Continuous Run (SUITABLE FOR DIRECT DISTRIBUTION ONLY)
LX2-CON-I	Inline Connector For Continuous Run (SUITABLE FOR INDIRECT DISTRIBUTION ONLY)
LX2-EMB*	8W Integral Emergency Battery for LX2 Series

Page 2 of 4


DIMENSIONS

Cross Section

SERIES & SIZE	DIMENSION	Section	
LX2-L2	L24" x W2" x H3"	1	 H W
LX2-L4	L48" x W2" x H3"	1	
LX2-L5	L60" x W2" x H3"	1	
LX2-L6	L72" x W2" x H3"	1	
LX2-L8	L96" x W2" x H3"	1	
LX2-IL2	L24" x W2" x H3.5"	1	 H W
LX2-IL4	L48" x W2" x H3.5"	1	
LX2-IL5	L60" x W2" x H3.5"	1	
LX2-IL6	L72" x W2" x H3.5"	1	
LX2-IL8	L96" x W2" x H3.5"	1	

Custom Length Consult Factory

Quick Mount

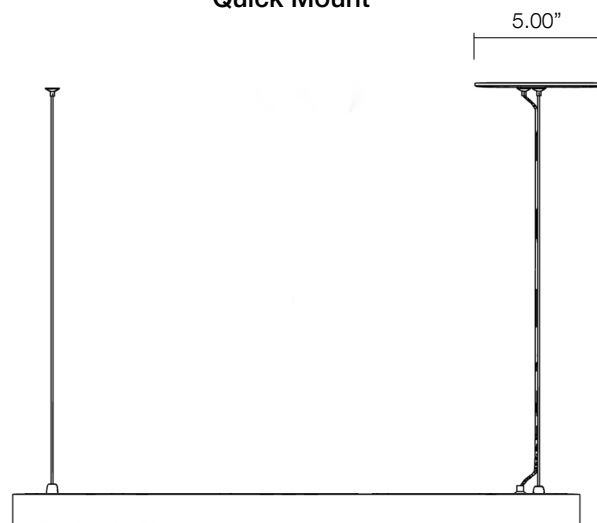

Surface Mount



LUX SERIES | LX2

COLOR CHART (CHOOSE ONE)

CC
RAL

Specify Color Code:
Specify RAL Color:



GR - Green



BL - Blue



PP - Purple



PK - Pink



RD - Red



OG - Orange



YW - Yellow



MB - Matte Black



GB - Gloss Black



MW - Matte White



GW - Gloss White



OB - Oil Rubbed Bronze



GZ - Gloss Bronze



MS - Matte Silver



MBS - Matte Brass



GBS - Gloss Brass

EMB SPEC

Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
LX2-EMB	90mins	100-347VAC	25-58VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Factory Install

