

Direct

Product Features

Revolve Series 86 - Ring shaped versatile architectural luminaire housing from rolled aluminum extruded profile, seamlessly welded; available with standard matte Black, White, Silver or custom RAL finish; available with steel cable suspension system through surface canopy or direct ceiling mount; power supply unit to be installed in canopy or remote; entire luminaire homogeneously illuminated, single ring shaped frosted PMMA lens; soft direct / indirect illumination characteristic for general illumination and maximum visual comfort; SAMSUNG LED with above 90CRI; available in 2700K, 3000K, 3500K, and 4000K; 85% of luminous flux after 50000 hours; ETL damp location listed; universal power supply with 0-10v dimming capability.

Technical Specifications



INPUT VOLTAGE	Universal Input AC120-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K
COLOR RENDERING INDEX	90
DISTRIBUTION	Direct
IP RATING	Damp Location
LIFE SPAN	50,000 Hours
DIMMING	0-10V Dimming



REVOLVE SERIES | RV-86

DIMENSIONS

Direct



FIXTURE MODEL

RV-86-D2	D24" x W1.3" x H1.5"
RV-86-D3	D36" x W1.3" x H1.5"
RV-86-D4	D48" x W1.3" x H1.5"
RV-86-D5	D60" x W1.3" x H1.5"

DIMENSION

D = Outer Diameter


MOUNTING CANOPY OPTION

CM-10", CM2-11", QM, SM
CM-10", CM2-11", QM, SM
CM-10", CM2-11", QM, SM
CM-14", CM2-14", QM, SM

MOUNTING OPTIONS

QM - Quick Mount w/Surface Mount Canopy

FIXTURE	CANOPY SIZE
RV-86-D2	10"
RV-86-D3	10"
RV-86-D4	10"
RV-86-D5	14"

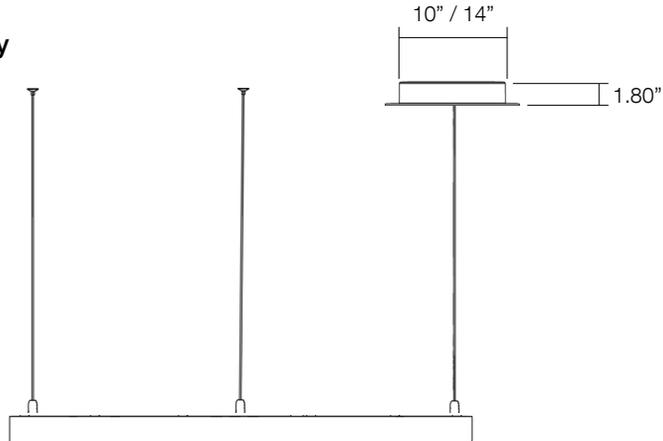

COLOR CHART (CHOOSE ONE)

CC
RAL

Specify Color Code:
Specify RAL Color:

 GR - Green	 BL - Blue	 PP - Purple	 PK - Pink	 RD - Red	 OG - Orange	 YW - Yellow
 MB - Matte Black	 GB - Gloss Black	 MW - Matte White	 GW - Gloss White	 OB - Oil Rubbed Bronze	 GZ - Gloss Bronze	 MS - Matte Silver
 MBS - Matte Brass	 GBS - Gloss Brass	 CNH285 - American Walnut	 QL0928 - European Cherry	 QL0503 - Light Oak	 QL0411 - Maple	 QL0908 - Palisander Santos