



---

**Architectural Linear**



## ABOUT US

---


We are passionate about transforming spaces through the power of light.

ALLURE Architectural designs and manufactures spec grade architectural lighting solutions, with a vision to deliver the experience that balance aesthetic and function.

Our commitment to innovation, sustainability, and precision engineering ensures every project is elevated with unparalleled brilliance.

Visit us!



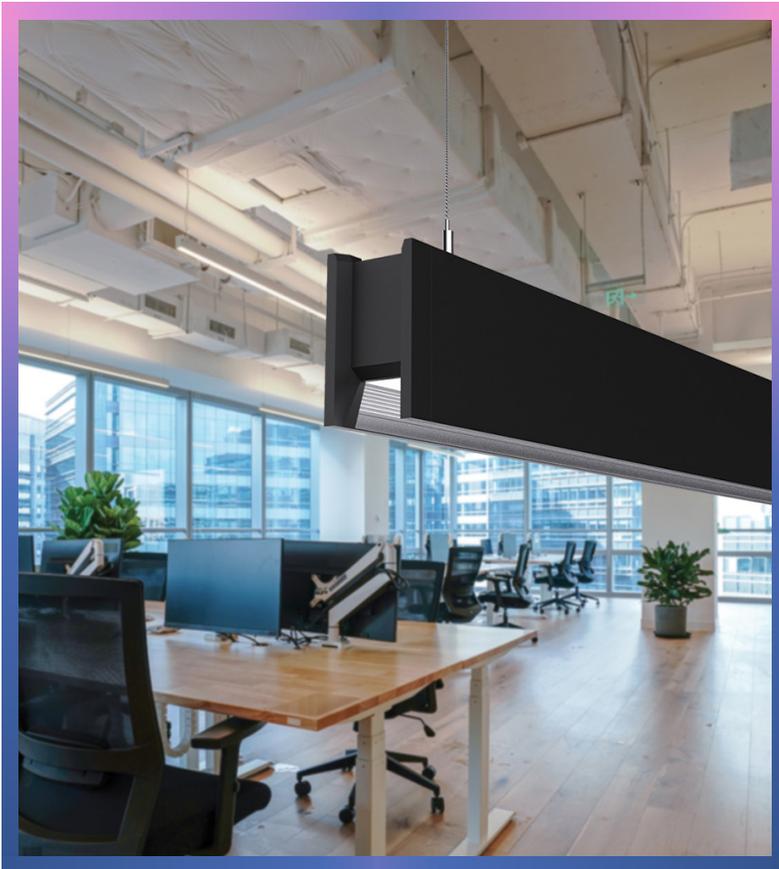

## EGL - 2.4" Profile Linear


- Suspended / Wall
- Decorative Reflector Optional - Multiple Colors Available
- 2FT / 4FT / 8FT
- Direct/Indirect Output Ratio Selectable
- CCT Selectable 2700~4000K
- 1250lm/FT






## EGL - 4" Profile Linear

- Suspended / Wall
- Decorative Reflector Optional - Multiple Colors Available
- 2FT / 4FT / 8FT
- Direct/Indirect Output Ratio Selectable
- CCT Selectable 2700~4000K
- 1550lm/FT

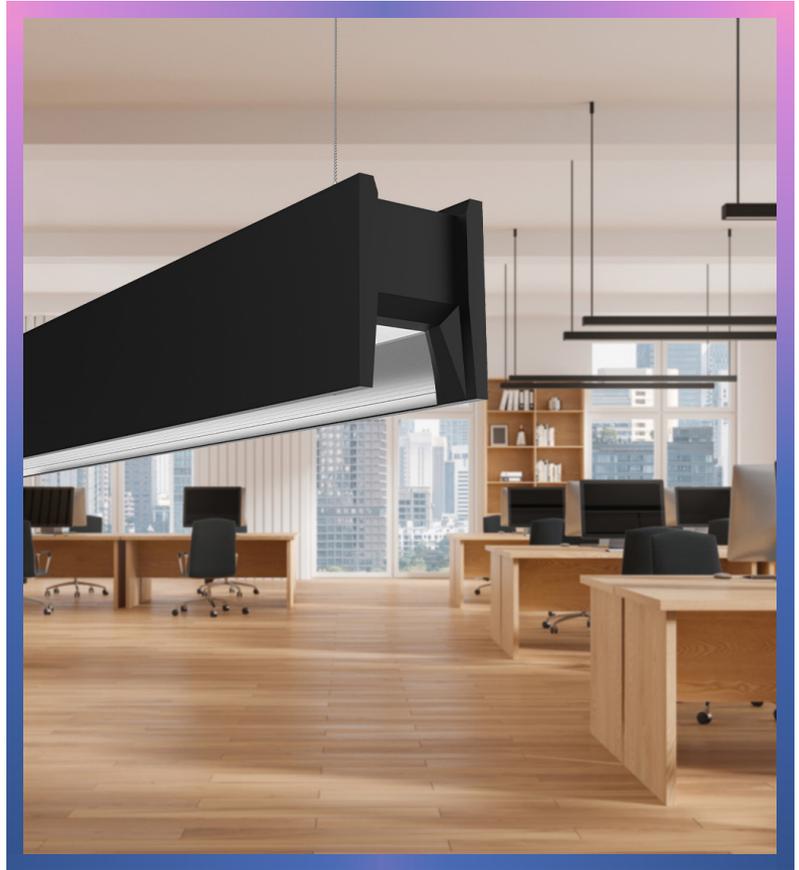


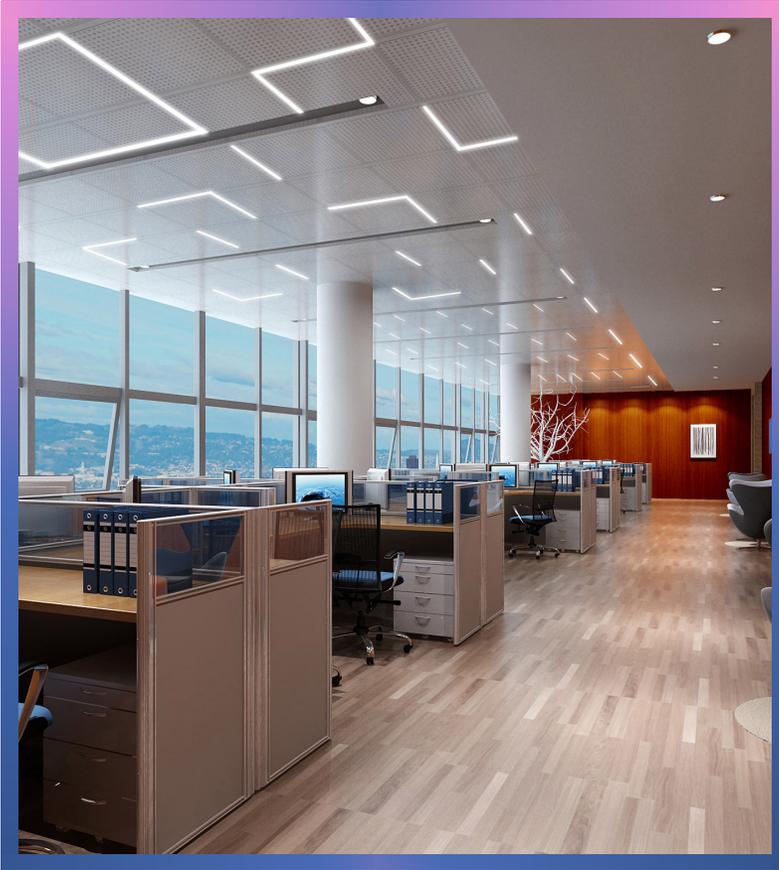

## GD - Architectural Grid Ceiling Linear


- Aluminum Extruded Profile with Milky Lens
- 2FT / 4FT
- Compatible w/Flat or Slot Grid
- CCEA Listed




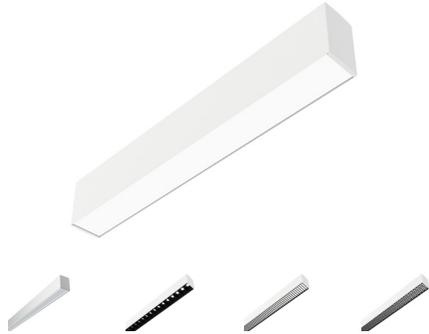

## LMA - Profile Linear

- Recessed / Surface / Suspended / Wall
- Diffuser and Louver Lens Options Available
- 2FT / 4FT / 6FT / 8FT
- Direct/Indirect Output Ratio Selectable
- CCT Selectable 2700-5000K
- 1250lm/FT

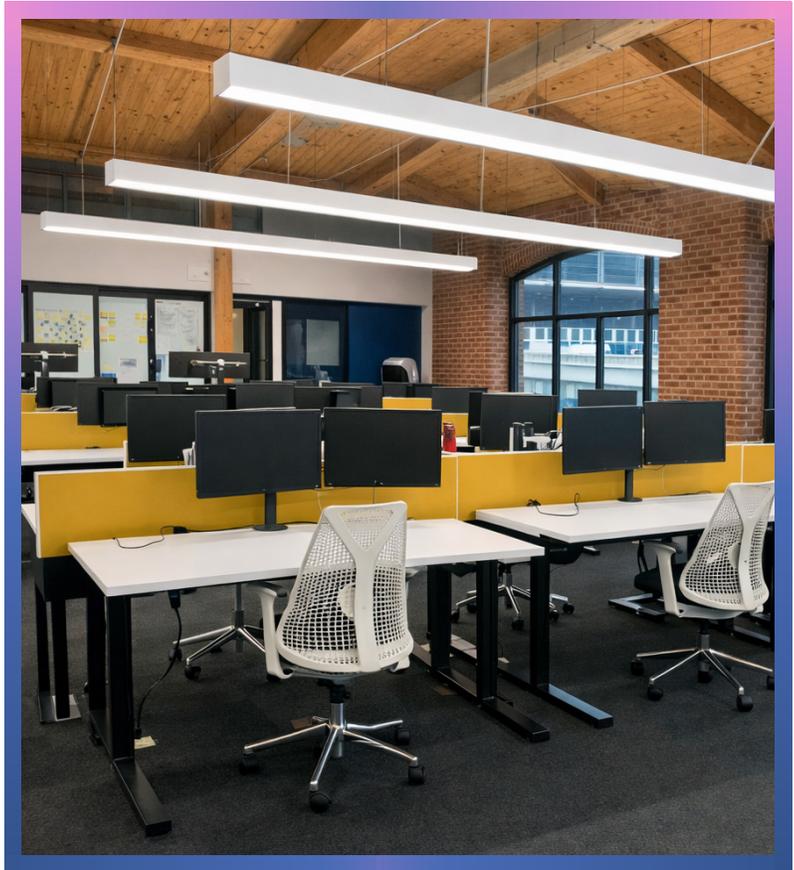

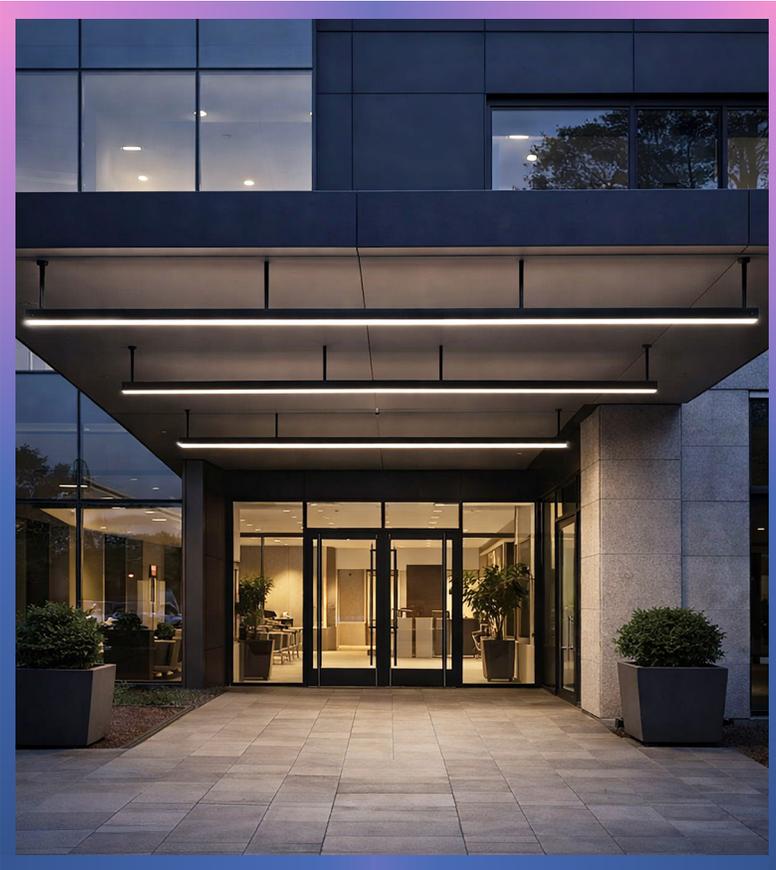

## LMA-W - Wet-Rated Profile Linear


- IP65 Wet Rated
- Surface / Suspended / Wall
- 2FT / 4FT / 8FT
- CCT Selectable 3000~4000K
- 1396lm/FT






## LX1-C - Cove / Display / Task

- 1" Aluminum Extruded Profile with PMMA Opal Lens
- White / Bronze Finish Housing
- CCT Selectable 3000~4000K
- 12" / 16" / 24" / 32"
- 750lm/FT
- 120V Input Triac Dimming

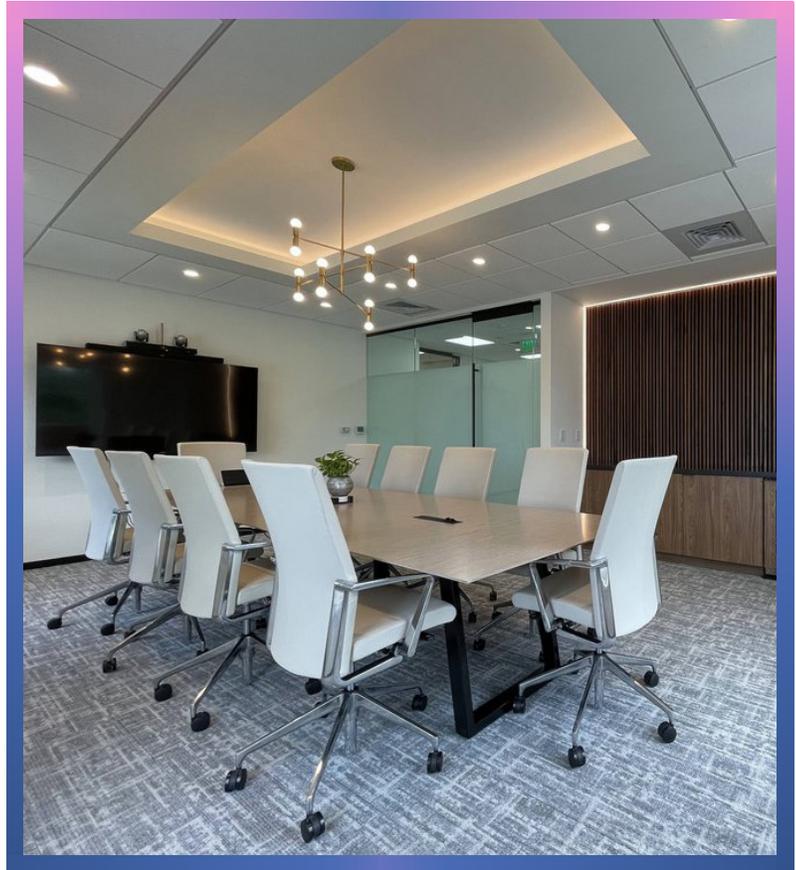


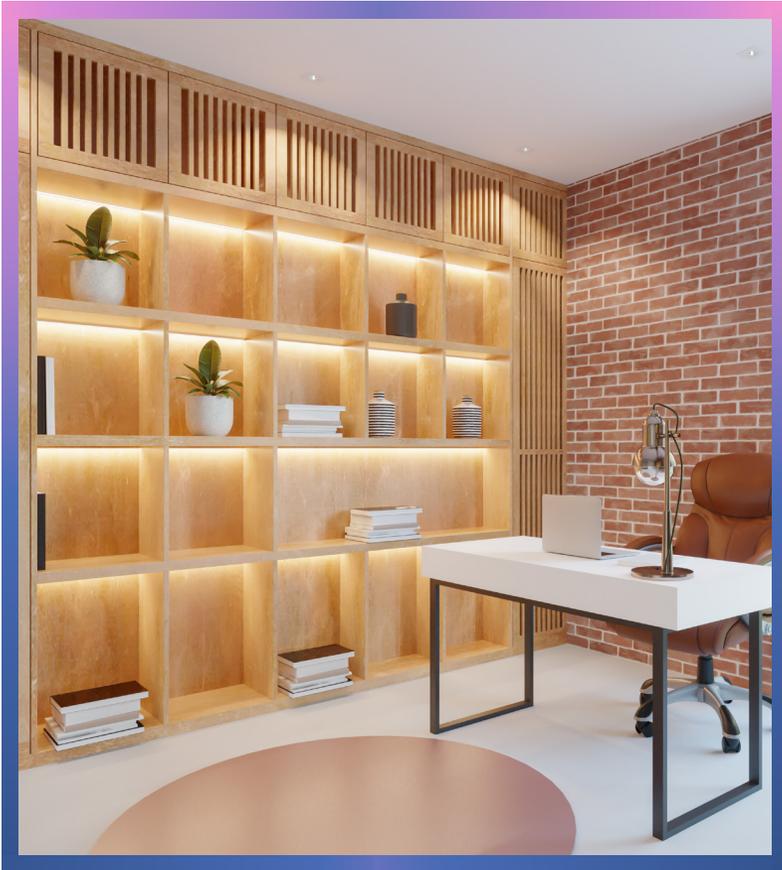

## LXS - Cove / Display / Cabinet

- 0.5" Aluminum Extruded Profile with PMMA Opal Lens
- 4" / 6" / 12" / 24" / 48"
- 270lm/FT
- 120V Input Triac Dimming



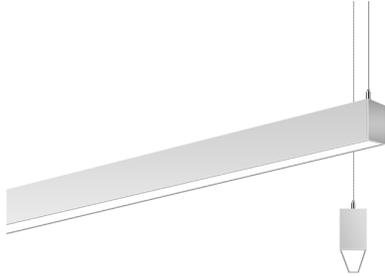

## LX - 1.3" Profile Linear

- Surface / Suspended / Wall
- 2FT / 4FT / 8FT
- Direct/Indirect Output Ratio Selectable
- CCT Selectable 3000~4000K
- 942lm/FT






## LX - 1.8" Profile Linear

- Surface / Suspended / Wall
- 2FT / 4FT / 8FT
- Direct/Indirect Output Ratio Selectable
- CCT Selectable 3000~4000K
- 1036lm/FT





## LX - 2.3" Profile Linear

- Recessed / Surface / Suspended / Wall
- 2FT / 3FT / 4FT / 8FT
- Direct/Indirect Output Ratio Selectable
- CCT Selectable 3000~4000K
- 1184lm/FT





## LX - 3.8" Profile Linear

- Recessed / Surface / Suspended / Wall
- 2FT / 3FT / 4FT / 8FT
- Direct/Indirect Output Ratio Selectable
- CCT Selectable 3000-4000K
- 1184lm/FT



