


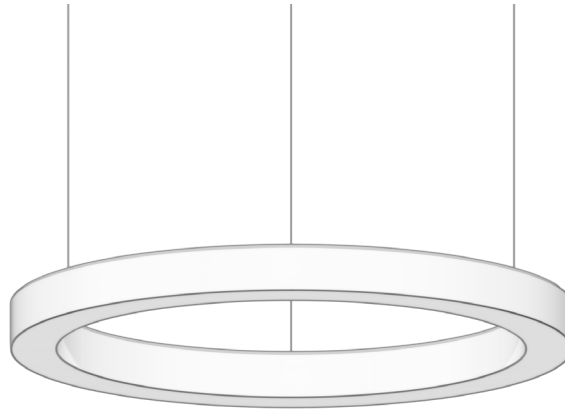

Product Features

Orbit Series - 360° Fully Illuminated Ring Architectural Luminaire with a full PMMA body construction; hardware available with standard Black or White finish; available with steel cable suspension system through surface canopy or direct ceiling mount; power supply unit to be installed in canopy or remote; entire luminaire homogeneously illuminated, single ring shaped frosted PMMA lens; above 90CRI; available in 2700K, 3000K, 3500K and 4000K; 70% of luminous flux after 50000 hours; ETL damp location listed; universal power supply with 0-10V dimming capability.

Technical Specifications

INPUT VOLTAGE	Universal Input AC120-277V
FREQUENCY	50/60hz
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K
COLOR RENDERING INDEX	90
DISTRIBUTION	360°
IP RATING	Damp Location
LIFE SPAN	50,000 Hours
DIMMING	0-10V Dimming





Order Code Example: **OB** - **D3** - **40** - **CM** - **OPTIONS**

A B C D E

OB Orbit 360° Fully Illuminated Ring Architectural Luminaire

CODE		DISTRIBUTION	POWER & LUMEN		LPW	DIMENSION	SUSPENSION	DRIVER	SECTION
D2	QS	Direct	40W	4,200lm	105	D23.6" x W4" x H4"	3	1	1
D3	QS	Direct	50W	5,250lm	105	D35.4" x W4" x H4"	3	1	1
D4	QS	Direct	80W	8,400lm	105	D47.2" x W4" x H4"	4	2	1


27	2700K
30	3000K
35	3500K
40	4000K

CM **QS** 5FT Steel Cable, 10-Inch Surface Mount Canopy, Integral Driver

blank	120/277V 0-10V Dimming
BAA	Assembled in America, Compliant with BAA (COTS)

ORBIT SERIES | OB

DIMENSIONS

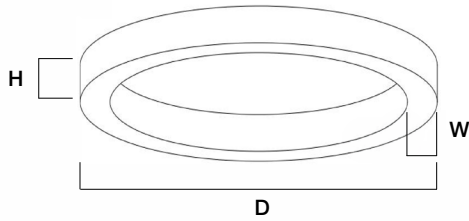

FIXTURE MODEL

OB-D2

OB-D3

OB-D4

DIMENSION

D23.6" x W4" x H4"

D35.4" x W4" x H4"

D47.2" x W4" x H4"

D = Outer Diameter

CM - Canopy Mount

