



Product Features

Cube Series - an ADA compliant wall sconce architectural luminaire, 3.9-inch fixture offering brilliant illumination with an 80+ CRI and a powerful 10W Bridgelux light engine. Constructed from die-cast aluminum with a frosted tempered glass lens. The luminaire features 0-100° field-adjustable shift boards to create various distribution angles, available in standard corrosion-resistant white and black finishes, CCT selectable range of 2700K to 6500K., 85% luminous flux retention after 50,000 hours, built-in photocell control, ETL listed for wet location, ideal for both residential and commercial applications.

Technical Specifications

INPUT VOLTAGE	AC120-277V
FREQUENCY	50/60hz
LUMEN	Direct - 360lm / Indirect - 360lm
WATTAGE	10W
LPW	72lm/W
COLOR TEMPERATURE	Field Selectable 2700K ~ 6500K
COLOR RENDERING INDEX	>80
DISTRIBUTION	Direct / Indirect
IP RATING	IP65 Wet Location
LIFE SPAN	>50,000 Hours



CUBE SERIES | CB

SUBMITTAL WORKSHEET

Order Code Example: **CB** - **4** - **SC** - **WM** - **BK** - **U-P** - **OPTIONS**
 A **B** **C** **D** **E** **F** **G**

A SERIES

CB Cube Series

B SIZE & OUTPUT

CODE	DISTRIBUTION	POWER & LUMEN	LPW	DIMENSION
4 QS	Direct / Indirect	10W 720lm	72	L3.94" x W3.94" x H3.94"

C CCT

SC **QS** Field Selectable 2700K / 3000K / 4000K / 5000K / 6500K

D MOUNTING

WM **QS** Wall Mount

E FINISH

WH QS	Matte White	CC*	Customized Color
BK QS	Matte Black		*see Customized Color Chart on page 4

F INPUT

U-P **QS** 120-277V with Built in Photocell


G OPTIONS

BAA Assembled in America, compliant with BAA (COTS)


CUBE SERIES | CB

DIMENSIONS


CODE	DIMENSION		
	L	W	H
CB-4	3.94"	3.94"	3.94"

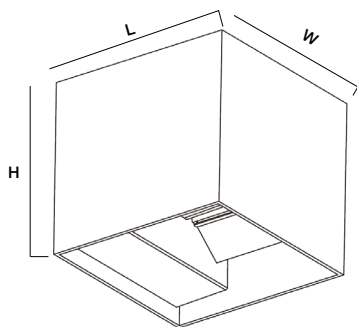

Bottom View




FIELD-ADJUSTABLE BEAM ANGLE

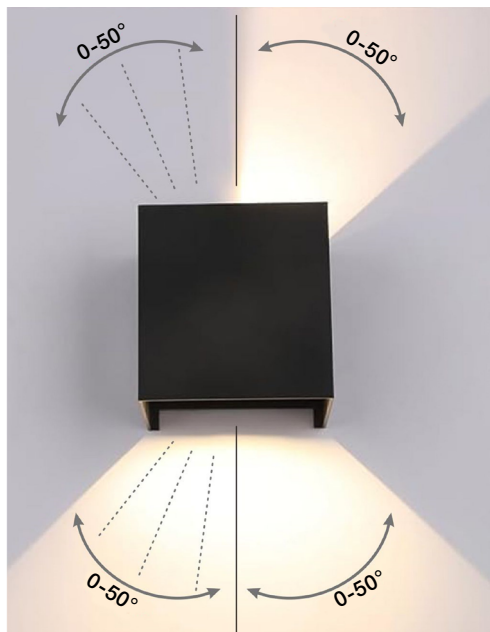


0° Indirect
20° Direct



20° Indirect
20° Direct



50° Indirect
50° Direct




0° Indirect
100° Direct




100° Indirect
0° Direct



20° Indirect
100° Direct



100° Indirect
20° Direct



100° Indirect
100° Direct

CUBE SERIES | CB

COLOR CHART (CHOOSE ONE)

CC
RAL

Specify Color Code:
Specify RAL Color:



GR - Green



BL - Blue



PP - Purple



PK - Pink



RD - Red



OG - Orange



YW - Yellow



MB - Matte Black



GB - Gloss Black



MW - Matte White



GW - Gloss White



OB - Oil Rubbed Bronze



GZ - Gloss Bronze



MS - Matte Silver



MBS - Matte Brass



GBS - Gloss Brass